

Type SPA **Solid Polymer Aluminum SMT Capacitors**



- Ultra-Low ESR – 5 m Ω to 9 m Ω @ 100 kHz
- High Ripple current – up to 4.0 Arms at 100 kHz
- Long Life – No dry out failure related mechanism
- Stable Impedance and ESR vs. Temperature
- Great for bulk storage and ripple filtering
- Ignition free

Applications

Motherboard By-Pass

Switching Supply Input/Output Filters

Power Supply Decoupling

High Frequency Noise Reduction

Laptop LCD Displays

Automotive Digital Equipment


Portable Electronic Equipment

Specifications


Operating Temperature:	-40 °C to +105 °C
Rated Voltage:	2 Vdc to 6.3 Vdc
Surge Voltage:	1.25 x Rated Voltage
Capacitance Range:	56 μ F to 470 μ F
Capacitance Tolerance:	\pm 20% @120 Hz, +20 °C
Dissipation Factor:	0.06 max (1.8/1.9); 0.10 max (2.8/4.2) (Case "H" mm; 120 Hz +20 °C)
DC Leakage Current:	$I \leq 0.06$ CV after 2 minutes
Load Life:	1000 h @ 105 °C Δ Capacitance: \pm 10% of the initial measured value D.F. \leq Initial specified value DCL \leq Initial specified value

Type SPA Solid Polymer Aluminum SMT Capacitors


Outline Drawing

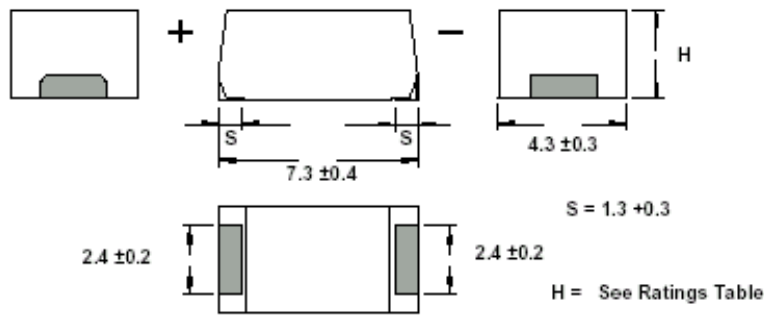

Markings

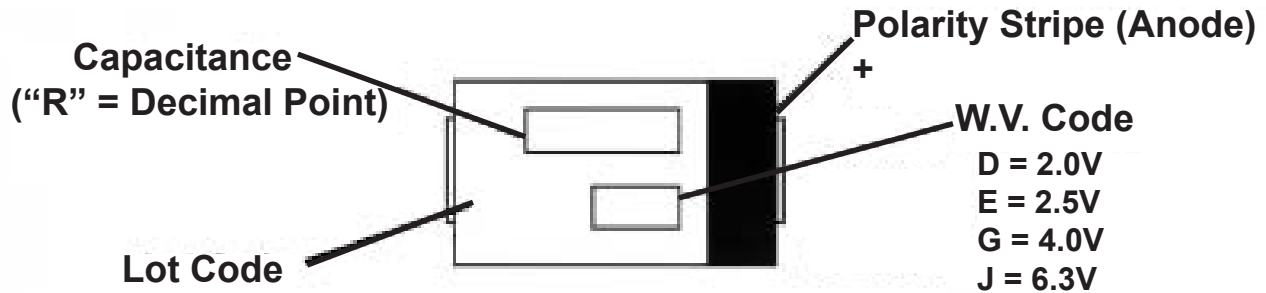

Ordering Information

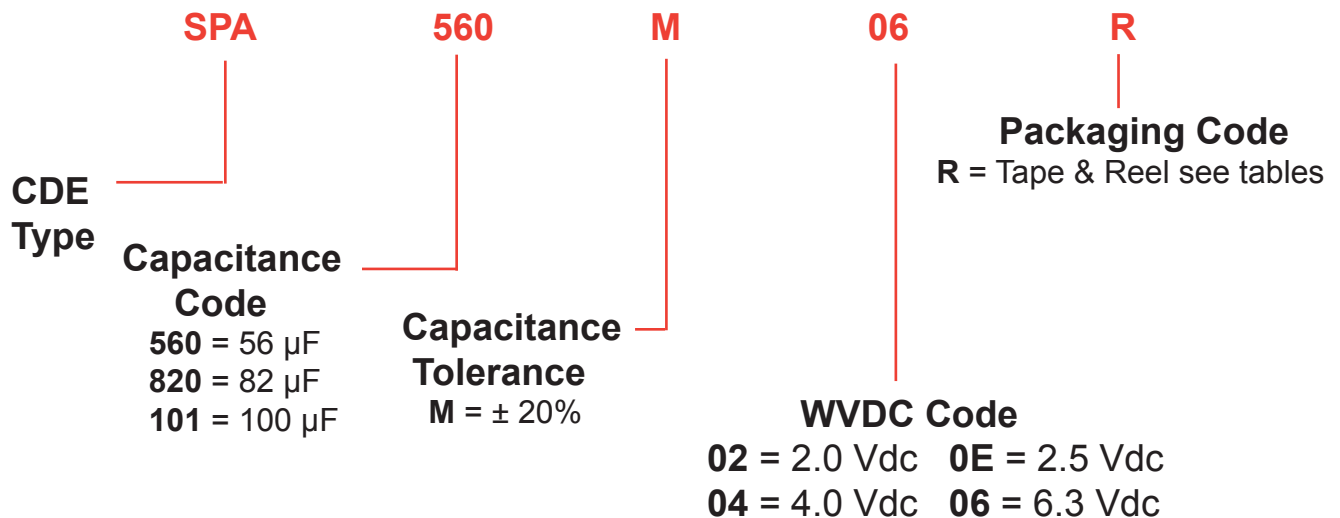

Type SPA Solid Polymer Aluminum SMT Capacitors

Ratings

Capacitance (μF)	Catalog Part Number (Tape & Reel)	Maximum	Maximum	Case	Qty/Reel
		E.S.R. 100 kHz/20 °C (Ω)	Ripple Current 100 kHz/105 °C (A_{rms})	Height H (mm)	
2.0 Vdc					
120	SPA121M02R	0.009	3.0	1.8 \pm 1	3500
150	SPA151M02R	0.009	3.0	1.8 \pm 1	3500
180	SPA181M02R	0.009	3.0	1.9 \pm 2	3500
270	SPA271M02R	0.007	3.5	2.8 \pm 2	2000
330	SPA331M02R	0.007	3.5	2.8 \pm 2	2000
390	SPA391M02R	0.005	4.0	4.2 \pm 1	2000
470	SPA471M02R	0.005	4.0	4.2 \pm 1	2000
2.5 Vdc					
100	SPA101M0ER	0.009	3.0	1.8 \pm 1	3500
120	SPA121M0ER	0.009	3.0	1.8 \pm 1	3500
150	SPA151M0ER	0.009	3.0	1.9 \pm 2	3500
220	SPA221M0ER	0.007	3.5	2.8 \pm 2	2000
270	SPA271M0ER	0.007	3.5	2.8 \pm 2	2000
330	SPA331M0ER	0.005	4.0	4.2 \pm 1	2000
390	SPA391M0ER	0.005	4.0	4.2 \pm 1	2000
4.0 Vdc					
82	SPA820M04R	0.009	3.0	1.8 \pm 1	3500
100	SPA101M04R	0.009	3.0	1.9 \pm 2	3500
150	SPA151M04R	0.007	3.5	2.8 \pm 2	2000
220	SPA221M04R	0.005	4.0	4.2 \pm 1	2000
6.3 Vdc					
56	SPA560M06R	0.009	3.0	1.8 \pm 1	3500
68	SPA680M06R	0.009	3.0	1.9 \pm 2	3500
120	SPA121M06R	0.007	3.5	2.8 \pm 2	2000
180	SPA181M06R	0.005	4.0	4.2 \pm 1	2000