

HYBRID IC VLA303-01

IPM POWER SUPPLY UNIT

DESCRIPTION

The VLA303-01 is an isolated DC-DC converter designed to drive the IPM. 6 outputs can obtain from an input of 140 to 380VDC. The terminals between input and outputs, and each outputs are isolated.

FEATURES


- Input -----140V to 380V DC
- Output-----+15V, 50mA x3
 - +15V, 150mA x1
 - +12V, 400mA x1
 - +5V, 300mA x1
- Electrical isolation (between input and outputs)
 - 1500Vrms 1 minute
- Electrical isolation (between each outputs)
 - 1500Vrms 1 minute

APPLICATIONS


Power supply for IPM drive

OUTLINE DRAWING

Dimensions: mm

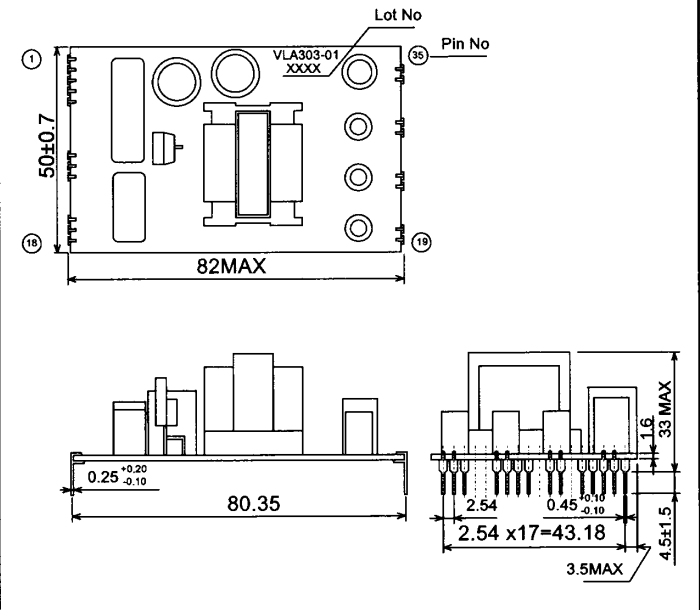

BLOCK DIAGRAM

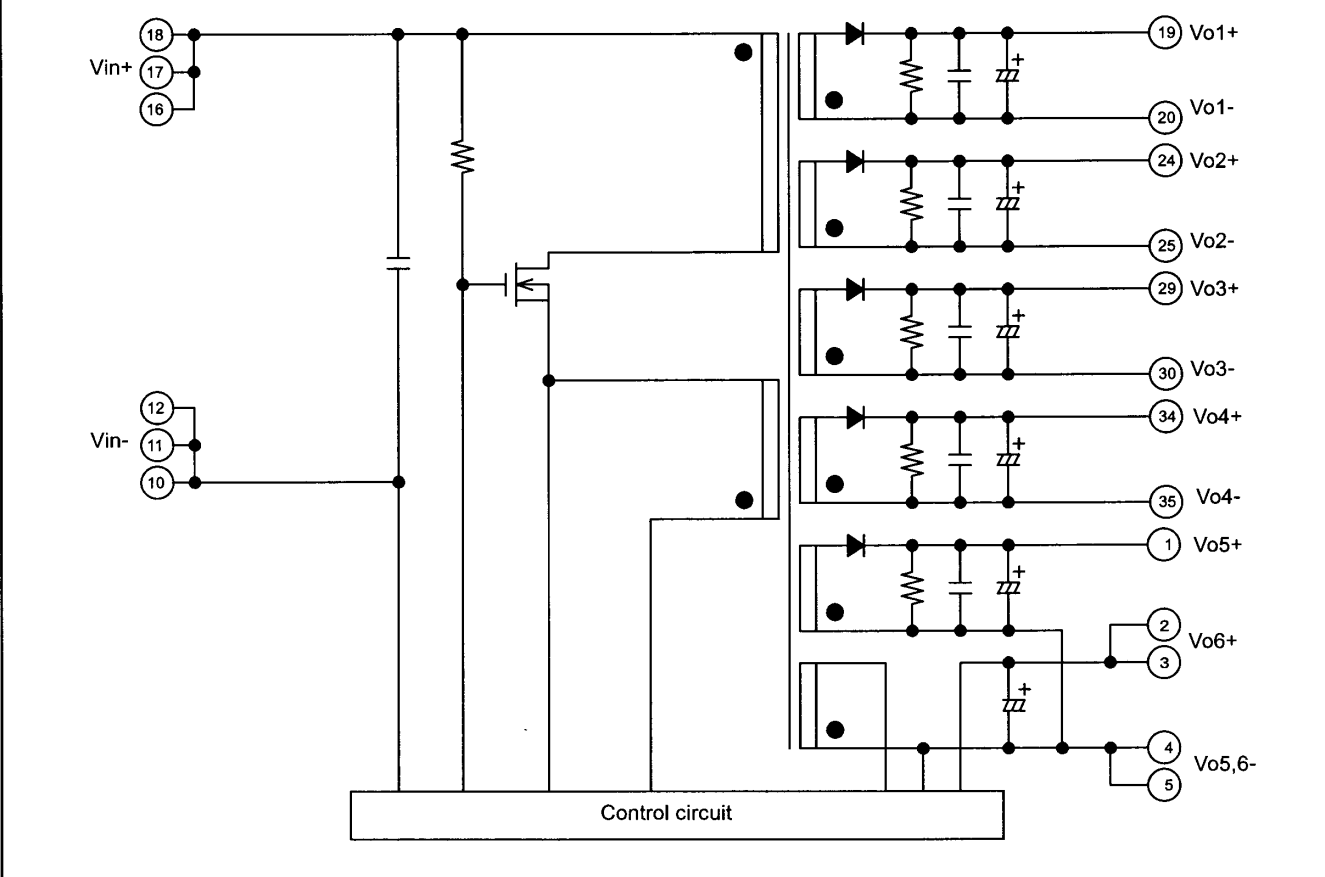

MAXIMUM RATINGS (unless otherwise noted, Ta=25°C)

Symbol	Parameter	Conditions	Ratings	Unit
V _{IN}	Input voltage	—	380	V
I _o	Output current	Vo1, Vo2, Vo3	50	mA
		Vo4	150	
		Vo5	400	
		Vo6	300	
Topr	Operating temperature	No condensation (*1)	-10 ~ +70	°C
Tstg	Storage temperature	No condensation	-20 ~ +85	°C
Po	Total output power	— (*1)	10.8	W
Viso1	Electrical isolation between input and outputs	Sine wave voltage, 60Hz, 1min	1500	Vrms
Viso2	Electrical isolation between each outputs	Sine wave voltage, 60Hz, 1min	1500	Vrms

(*1) Please refer to derating characteristics.


ELECTRICAL CHARACTERISTICS (unless otherwise noted, V_{IN}=140~380V, Ta=25°C)

Symbol	Parameter	Test conditions	Limits			Unit
			Min.	Typ.	Max.	
V _{IN}	Input voltage	Recommended range	140	-	380	V
Vo1	Output voltage (*2)	I _{o1} =5 ~ 50mA, I _{o2} =I _{o3} =5mA, I _{o4} =25mA I _{o5} =200mA, I _{o6} =200mA	14	15	16	V
Vo2		I _{o2} =5 ~ 50mA, I _{o1} =I _{o3} =5mA, I _{o4} =25mA I _{o5} =200mA, I _{o6} =200mA	14	15	16	
Vo3		I _{o3} =5 ~ 50mA, I _{o1} =I _{o2} =5mA, I _{o4} =25mA I _{o5} =200mA, I _{o6} =200mA	14	15	16	
Vo4		I _{o4} =25 ~ 150mA, I _{o1} =I _{o2} =I _{o3} =5mA I _{o5} =200mA, I _{o6} =200mA	14	15	16	
Vo5		I _{o5} =30 ~ 400mA, I _{o1} =I _{o2} =I _{o3} =5mA I _{o4} =25mA, I _{o6} =200mA	11	12	14	
Vo6		I _{o6} =50 ~ 300mA, I _{o1} =I _{o2} =I _{o3} =5mA I _{o4} =25mA, I _{o5} =200mA	4.75	5.00	5.25	
„	Efficiency	V _{IN} =300V, P _o =10.8W	70	77	—	%

(*2) It needs to output current of I_{o6} over 50mA.

Symbol	Parameter	Test conditions	Limits			Unit
			Min.	Typ.	Max.	
Reg-I	Input regulation	Vo1 voltage change Io1=Io2=Io3=50mA, Io4=150mA, Io5=400mA, Io6=300mA	—	0.3	0.5	V
		Vo2 voltage change Io1=Io2=Io3=50mA, Io4=150mA, Io5=400mA, Io6=300mA	—	0.3	0.5	
		Vo3 voltage change Io1=Io2=Io3=50mA, Io4=150mA, Io5=400mA, Io6=300mA	—	0.3	0.5	
		Vo4 voltage change Io1=Io2=Io3=50mA, Io4=150mA, Io5=400mA, Io6=300mA	—	0.3	0.5	
		Vo5 voltage change Io1=Io2=Io3=50mA, Io4=150mA, Io5=400mA, Io6=300mA	—	0.2	0.5	
		Vo6 voltage change Io1=Io2=Io3=50mA, Io4=150mA, Io5=400mA, Io6=300mA	—	0.1	0.2	
Reg-L	Load regulation	Vo1 voltage change Io1=5~50mA, Io2=Io3=50mA, Io4=150mA, Io5=400mA, Io6=300mA, Vin=300V	—	0.4	1.0	V
		Vo2 voltage change Io2=5~50mA, Io1=Io3=50mA, Io4=150mA, Io5=400mA, Io6=300mA, Vin=300V	—	0.4	1.0	
		Vo3 voltage change Io3=5~50mA, Io1=Io2=50mA, Io4=150mA, Io5=400mA, Io6=300mA, Vin=300V	—	0.4	1.0	
		Vo4 voltage change Io4=25~150mA, Io1=Io2=Io3=50mA, Io5=400mA, Io6=300mA, Vin=300V	—	0.5	1.0	
		Vo5 voltage change Io5=30~400mA, Io1=Io2=Io3=50mA, Io4=150mA, Io6=300mA, Vin=300V	—	1.5	1.8	
		Vo6 voltage change Io6=50~300mA, Io1=Io2=Io3=50mA, Io4=150mA, Io5=400mA, Vin=300V	—	0.1	0.2	


APPLICATION EXAMPLE

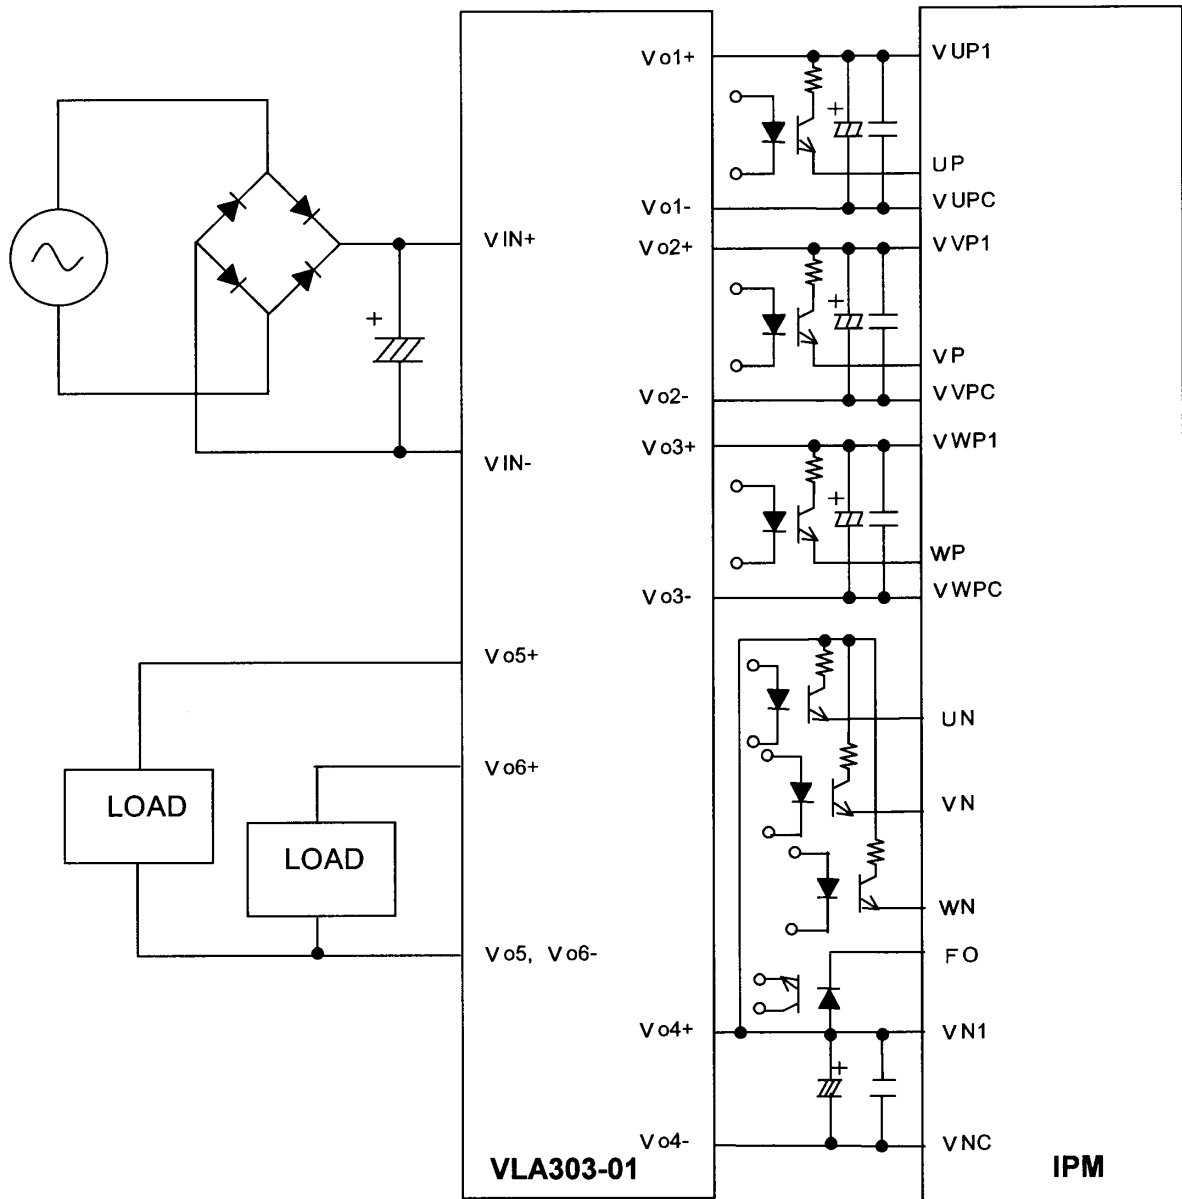


• Please be sure to have a load 50mA or more for Vo6 terminal, in order to stabilize operation of this product.

TYPICAL CHARACTERISTICS (unless otherwise noted, $T_a=25^\circ\text{C}$)


V_{o1} OUTPUT VOLTAGE VS.
INPUT VOLTAGE CHARACTERISTICS

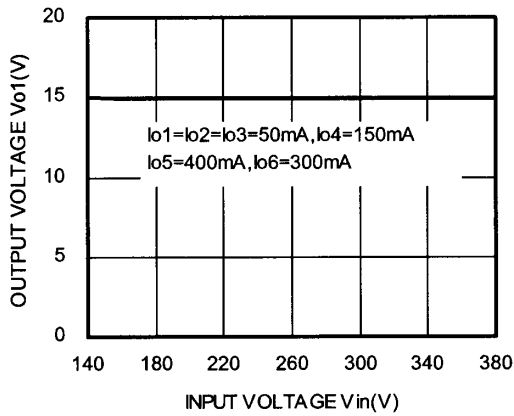


V_{o2} OUTPUT VOLTAGE VS.
INPUT VOLTAGE CHARACTERISTICS

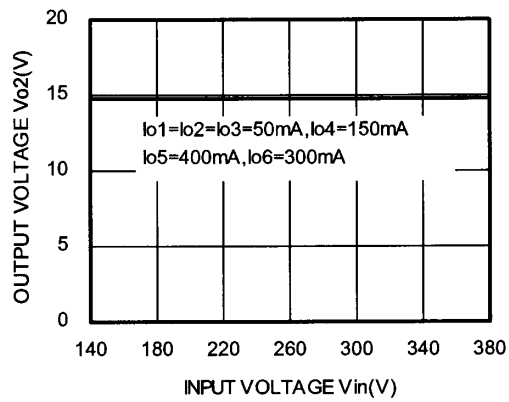


V_{o3} OUTPUT VOLTAGE VS.
INPUT VOLTAGE CHARACTERISTICS

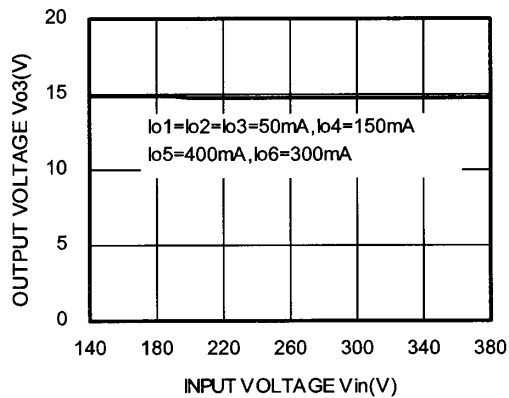


V_{o4} OUTPUT VOLTAGE VS.
INPUT VOLTAGE CHARACTERISTICS

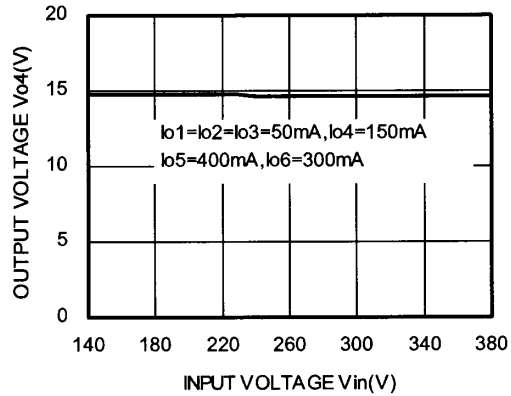


V_{o5} OUTPUT VOLTAGE VS.
INPUT VOLTAGE CHARACTERISTICS

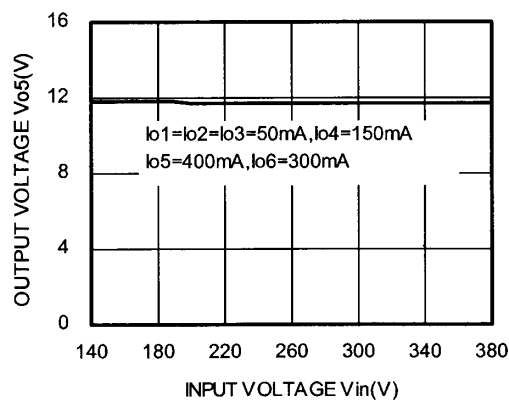


V_{o6} OUTPUT VOLTAGE VS.
INPUT VOLTAGE CHARACTERISTICS

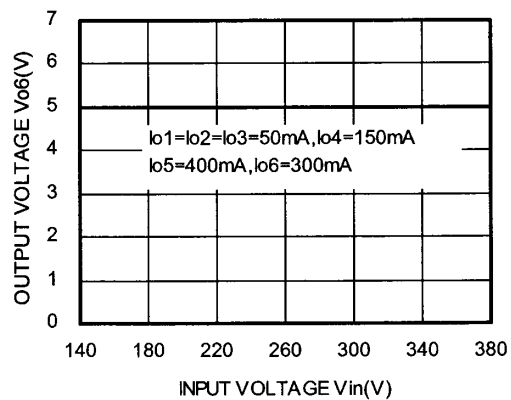


Vo1 OUTPUT VOLTAGE VS.
LOAD CURRENT CHARACTERISTICS

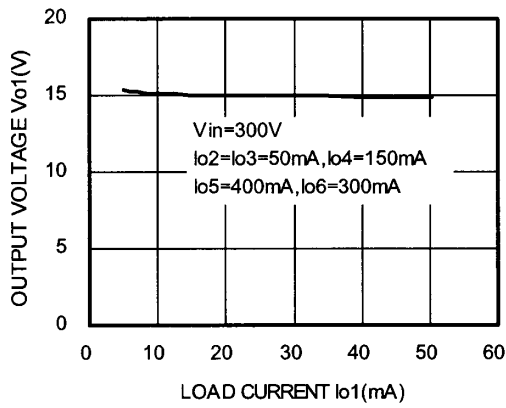


Vo2 OUTPUT VOLTAGE VS.
LOAD CURRENT CHARACTERISTICS

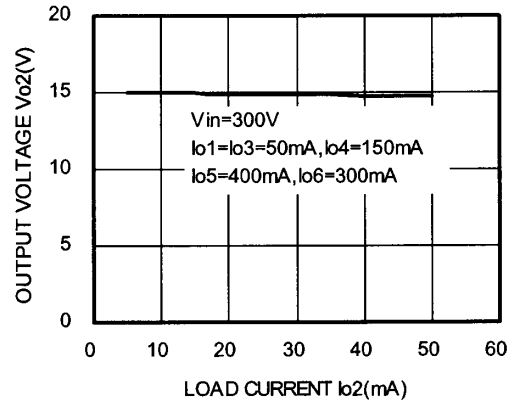


Vo3 OUTPUT VOLTAGE VS.
LOAD CURRENT CHARACTERISTICS

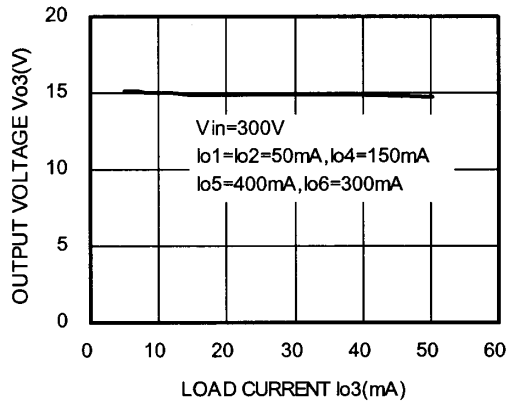


Vo4 OUTPUT VOLTAGE VS.
LOAD CURRENT CHARACTERISTICS

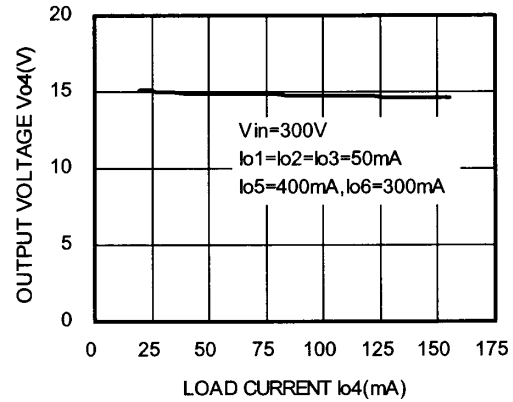

Vo5 OUTPUT VOLTAGE VS.
LOAD CURRENT CHARACTERISTICS

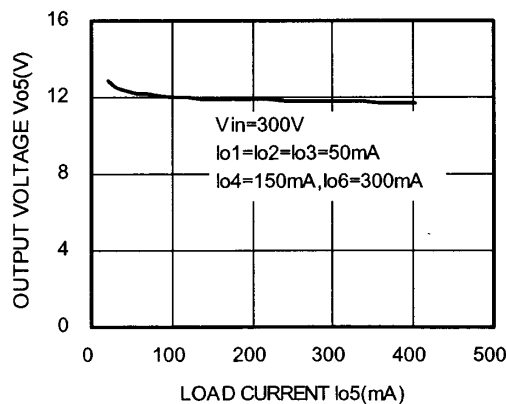


Vo6 OUTPUT VOLTAGE VS.
LOAD CURRENT CHARACTERISTICS

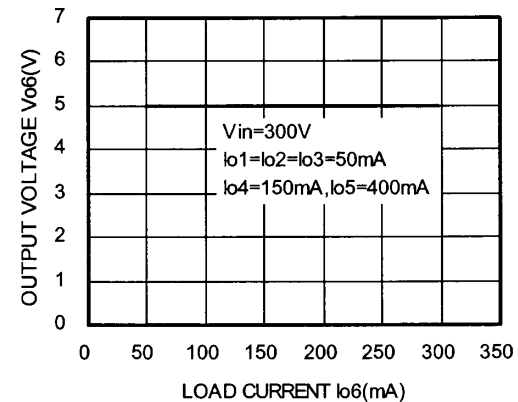


IPM POWER SUPPLY UNIT


EFFICIENCY VS.
INPUT VOLTAGE CHARACTERISTICS

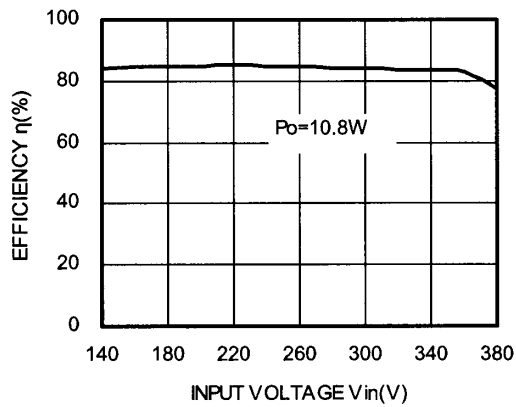


EFFICIENCY VS.
TOTAL OUTPUT POWER CHARACTERISTICS

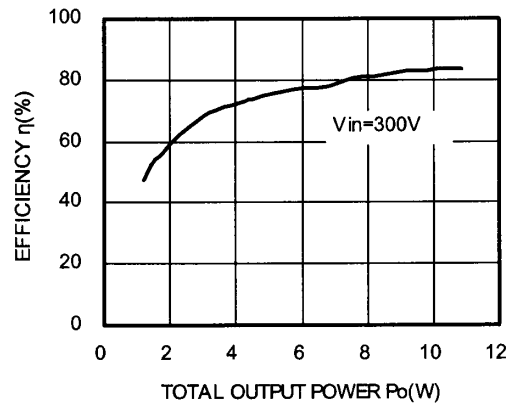


V_{o6} OUTPUT VOLTAGE VS.
TOTAL OUTPUT POWER CHARACTERISTICS

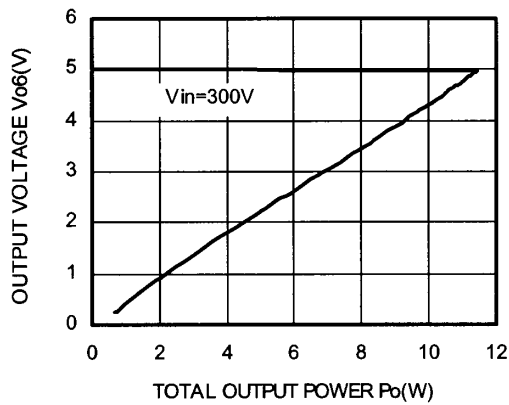


INPUT CURRENT VS.
INPUT VOLTAGE CHARACTERISTICS

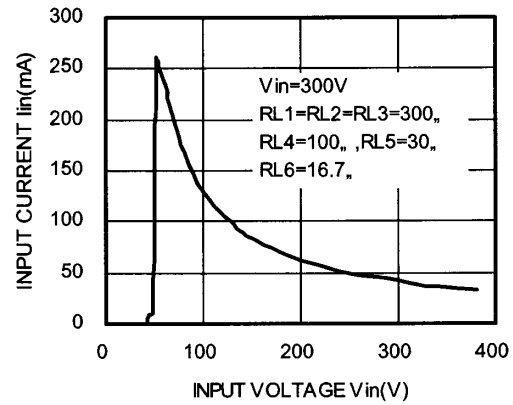

TOTAL OUTPUT POWER VS.
INPUT VOLTAGE CHARACTERISTICS

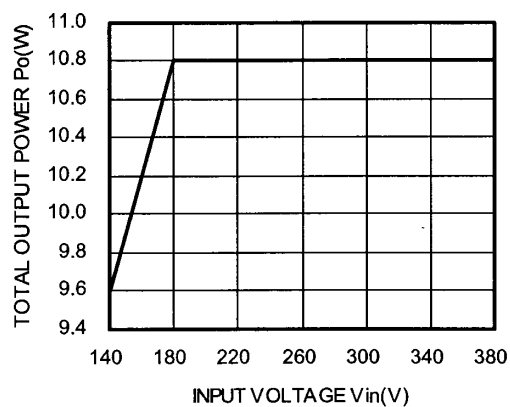

TOTAL OUTPUT POWER VS.
TEMPERATURE DERATING CURVE

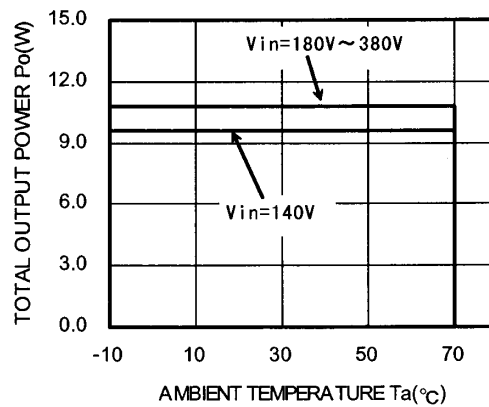

FOR SAFETY USING

Great detail and careful attention are given to the production activity of Hics, such as the development, the quality of production, and in its reliability. However the reliability of Hics depends not only on their own factors but also in their condition of usage. When handling Hics, please note the following cautions.

CAUTIONS	
Packing	The materials used in packing Hics can only withstand normal external conditions. When exposed to outside shocks, rain and certain environmental contaminants, the packing materials will deteriorates. Please take care in handling.
Carrying	<ol style="list-style-type: none"> 1) Don't stack boxes too high. Avoid placing heavy materials on boxes. 2) Boxes must be positioned correctly during transportation to avoid breakage. 3) Don't throw or drop boxes. 4) Keep boxes dry. Avoid rain or snow. 5) Minimal vibration and shock during transportation is desirable.
Storage	<p>When storing Hics, please observe the following notices or possible deterioration of their electrical characteristics, risk of solderability, and external damage may occur.</p> <ol style="list-style-type: none"> 1) Devices must be stored where fluctuation of temperature and humidity is minimal, and must not be exposed to direct sunlight. Store at the normal temperature of 5 to 30 degrees Celsius with humidity at 40 to 60%. 2) Avoid locations where corrosive gasses are generated or where much dust accumulates. 3) Storage cases must be static proof. 4) Avoid putting weight on boxes.
Extended storage	When extended storage is necessary, Hics must be kept non-processed. When using Hics which have been stored for more than one year or under severe conditions, be sure to check that the exterior is free from flaw and other damages.
Maximum ratings	To prevent any electrical damages, use Hics within the maximum ratings. The temperaqtue, current, voltage, etc. must not exceed these conditions.
Polarity	To protect Hics from destruction and deterioration due to wrong insertion, make sure of polarity in inserting leads into the board holes, conforming to the external view for the terminal arrangement.

ISAHAYA ELECTRONICS CORPORATION

Marketing division, Marketing planning department

6-41 Tsukuba, Isahaya, Nagasaki, 854-0065 Japan

Keep safety first in your circuit designs!

- ISAHAYA Electronics Corporation puts the maximum effort into making semiconductor products better and more reliable, but there is always the possibility that trouble may occur with them. Trouble with semiconductors may lead to personal injury, fire or property damage. Remember to give due consideration to safety when making your circuit designs, with appropriate measures such as (1) placement of substitutive, auxiliary circuits, (2) use of non-flammable material or (3) prevention against any malfunction or mishap.

Notes regarding these materials

- These materials are intended as a reference to our customers in the selection of the ISAHAYA products best suited to the customer's application; they don't convey any license under any intellectual property rights, or any other rights, belonging to ISAHAYA Electronics Corporation or a third party.
- ISAHAYA Electronics Corporation assumes no responsibility for any damage, or infringement of any third party's rights, originating in the use of any product data, diagrams, charts or circuit application examples contained in these materials.
- All information contained in these materials, including product data, diagrams and charts, represent information on products at the time of publication of these materials, and are subject to change by ISAHAYA Electronics Corporation without notice due to product improvements or other reasons. It is therefore recommended that customers contact ISAHAYA Electronics Corporation or an authorized ISAHAYA products distributor for the latest product information before purchasing a product listed herein.
- ISAHAYA Electronics Corporation products are not designed or manufactured for use in a device or system that is used under circumstances in which human life is potentially at stake. Please contact ISAHAYA Electronics Corporation or an authorized ISAHAYA products distributor when considering the use of a product contained herein for any specific purposes, such as apparatus or systems for transportation, vehicular, medical, aerospace, nuclear, or undersea repeater use.
- The prior written approval of ISAHAYA Electronics Corporation is necessary to reprint or reproduce in whole or in part these materials.
- If these products or technologies are subject to the Japanese export control restrictions, they must be exported under a license from the Japanese government and cannot be imported into a country other than the approved destination. Any diversion or reexport contrary to the export control laws and regulations of Japan and/or the country of destination is prohibited.
- Please contact ISAHAYA Electronics Corporation or an authorized ISAHAYA products distributor for further details on these materials or the products contained therein.