

Ceramic Balun RF Transformer

50Ω 1200 to 2200 MHz

TCN4-22+ TCN4-22



Maximum Ratings


Operating Temperature	-55°C to 100°C
Storage Temperature	-55°C to 100°C
Input RF Power**	5W

**From 85°C derate linearly to 2.5 W at 100°C

Pin Connections

PRIMARY DOT	2
PRIMARY(GND)	1,3
SECONDARY DOT	4
SECONDARY	6
GROUND	5


Outline Drawing

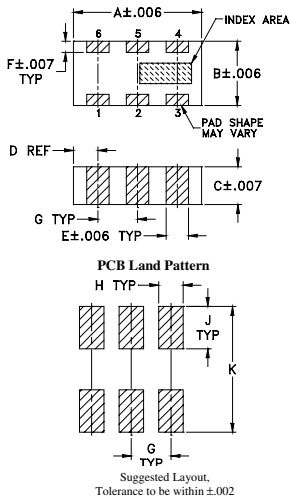

Outline Dimensions (inch/mm)

A	B	C	D	E	F	
.126	.063	.035	.024	.022	.011	
3.20	1.60	0.89	0.61	0.56	0.28	
G	H	J	K			wt
.039	.024	.042	.123			grams
0.99	0.61	1.07	3.12			.020

Demo Board MCL P/N: TB-298 Suggested PCB Layout (PL-162)

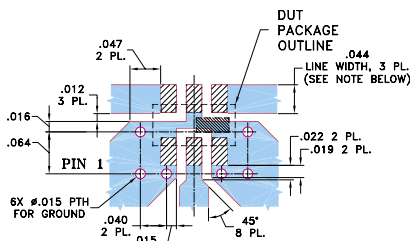

NOTE: 1. TRACE WIDTH IS SHOWN FOR ROGERS R04350 WITH DIELECTRIC THICKNESS .020 ± .0015. COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.

■ DENOTES PCB COPPER LAYOUT
■ DENOTES COPPER LAND PATTERN FREE OF SOLDERMASK

Features

- wideband, 1200 to 2200 MHz
- low phase unbalance
- miniature size, 0.12"x.06"x.037"
- LTCC construction
- low cost
- aqueous washable

Applications

- GSM
- CDMA
- GPS
- DECT
- PCN
- PCS
- ISM

Electrical Specifications (T_{AMB}=25°C)





Ω RATIO (Secondary/Primary)	FREQUENCY (MHz)	INSERTION* LOSS (dB)	PHASE UNBALANCE † (Deg.) Typ.	AMPLITUDE UNBALANCE (dB) Typ.
4	1200-2200	1.0	10	0.6

* Insertion Loss is referenced to mid-band loss, 0.9 dB

† Relative to 180°

Typical Performance Data

FREQUENCY (MHz)	INSERTION LOSS (dB)	INPUT R. LOSS (dB)	AMPLITUDE UNBALANCE (dB)	PHASE UNBALANCE (Deg.)
1200.00	0.55	12.54	0.38	13.12
1300.00	0.64	13.68	0.25	13.07
1400.00	0.73	14.80	0.04	12.32
1500.00	0.81	15.52	0.16	10.86
1600.00	0.90	15.33	0.26	8.60
1700.00	1.00	14.39	0.33	5.70
1800.00	1.10	13.02	0.36	2.10
1900.00	1.23	11.67	0.40	1.87
2000.00	1.35	10.47	0.38	6.35
2100.00	1.47	9.46	0.33	10.89
2200.00	1.55	8.60	0.20	15.55

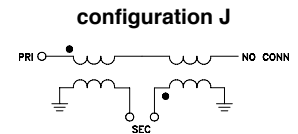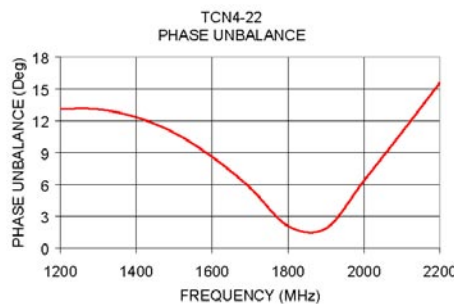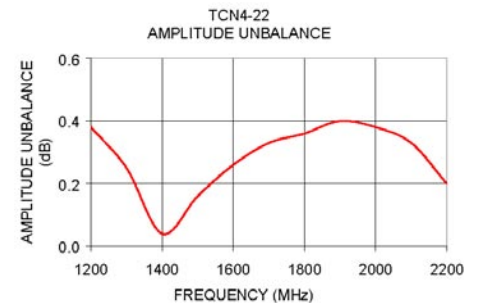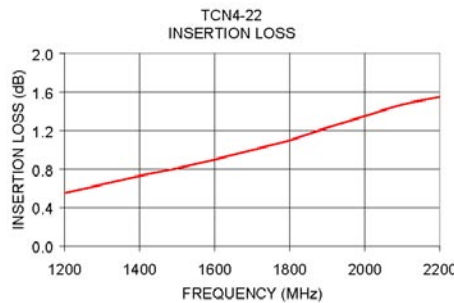

Mini-Circuits®
ISO 9001 ISO 14001 CERTIFIED

ALL NEW
minicircuits.com

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 For detailed performance specs & shopping online see Mini-Circuits web site



The Design Engineers Search Engine Provides ACTUAL Data Instantly From MINI-CIRCUITS At: www.minicircuits.com

RF/IF MICROWAVE COMPONENTS

REV. B
M102713
TCN4-22
ED-11659/1
AD/RS/CP/AM
080114