

Aluminum Capacitors SMD (Chip), Very Low Z





Fig.1 Component outline

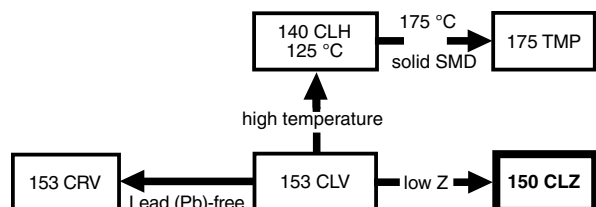

QUICK REFERENCE DATA

DESCRIPTION	VALUE
Nominal case sizes (L x W x H in mm)	8 x 8 x 10 to 10 x 10 x 14
Rated capacitance range, C_R	33 to 1000 μ F
Tolerance on C_R	$\pm 20 \%$
Rated voltage range, U_R	6.3 to 63 V
Category temperature range	- 55 to + 105 °C
Endurance test at 105 °C:	2000 hours
Useful life at 105 °C:	
case size $\leq 10 \times 10 \times 10$	2500 hours
case size $10 \times 10 \times 14$	3000 hours
Useful life at 40 °C; 1.8 x I_R applied:	
case size $\leq 10 \times 10 \times 10$	125 000 hours
case size $10 \times 10 \times 14$	150 000 hours
Shelf life at 0 V, 105 °C	1000 hours
Based on sectional specification	IEC 60384-18/CECC32300
Climatic category IEC 60068	55/105/56

SELECTION CHART FOR C_R , U_R AND RELEVANT NOMINAL CASE SIZES (L x W x H in mm)

C_R (mF)	U_R (V)						
	6.3	10	16	25	35	50	63
33	-	-	-	-	-	-	8 x 8 x 10
47	-	-	-	-	-	-	8 x 8 x 10
	-	-	-	-	-	-	10 x 10 x 10
68	-	-	-	-	-	8 x 8 x 10	10 x 10 x 10
100	-	-	-	-	8 x 8 x 10	10 x 10 x 10	10 x 10 x 14
150	-	-	-	8 x 8 x 10	-	-	-
220	-	-	8 x 8 x 10	8 x 8 x 10	10 x 10 x 10	10 x 10 x 14	-
330	-	8 x 8 x 10	8 x 8 x 10	10 x 10 x 10	10 x 10 x 14	-	-
470	8 x 8 x 10	8 x 8 x 10	10 x 10 x 10	10 x 10 x 14	-	-	-
680	-	10 x 10 x 10	10 x 10 x 14	-	-	-	-
1000	10 x 10 x 10	10 x 10 x 14	-	-	-	-	-

FEATURES

- Polarized aluminum electrolytic capacitors, non-solid electrolyte, self healing
- SMD-version with base plate, reflow solderable
- Very low impedance, very high ripple current
- Very long useful life: 3000 hours at 105 °C
- Charge and discharge proof, no peak current limitation
- Lead (Pb)-free
- ATTENTION: for maximum safe soldering conditions refer to fig.4

APPLICATIONS

- SMD technology, for high mounting density
- Industrial and professional applications
- Automotive, general industrial
- Smoothing, filtering, buffering.

MARKING

- Rated capacitance (in μ F)
- Rated voltage (in V)
- Date code, in accordance with IEC 60062
- Black mark or '-' sign indicating the cathode (the anode is identified by bevelled edges)
- Code indicating group number (Z)

PACKAGING

- Supplied in blister tape on reel

Table 1

DIMENSIONS in millimeters AND MASS									
NOMINAL CASE SIZE L x W x H	CASE CODE	L _{max.}	W _{max.}	H _{max.}	Ø D	B _{max.}	S	L _{1 max.}	MASS (g)
8 x 8 x 10	0810	8.5	8.5	10.5	8.0	1.0	3.1	9.9	≈ 1.0
10 x 10 x 10	1010	10.5	10.5	10.5	10.0	1.0	4.5	11.8	≈ 1.3
10 x 10 x 14	1014	10.5	10.5	14.3	10.0	1.0	4.5	11.8	≈ 1.5

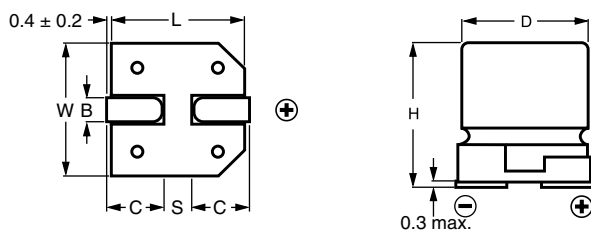


Fig.2 Dimensional outline

Table 2

TAPE AND REEL DIMENSIONS in millimeters, PACKAGING QUANTITIES						
NOMINAL CASE SIZE L x W x H	CASE CODE	PITCH P ₁	TAPE WIDTH W	TAPE THICKNESS T ₂	REEL DIA.	PACKAGING QUANTITY PER REEL
8 x 8 x 10	0810	16	24	11.3	380	500
10 x 10 x 10	1010	16	24	11.3	380	500
10 x 10 x 14	1014	16	24	14.8	330	250

Note

1. Detailed tape dimensions see section "PACKAGING".

MOUNTING

The capacitors are designed for automatic placement on to printed-circuit boards.

Optimum dimensions of soldering pads depend amongst others on soldering method, mounting accuracy, print layout and/or adjacent components.

For recommended soldering pad dimensions, refer to Fig.3 and Table 3.

SOLDERING

Soldering conditions are defined by the curve, temperature versus time, where the temperature is that measured on the soldering pad during processing.

For maximum conditions refer to Fig.4.

Any temperature versus time curve which does not exceed the specified maximum curves may be applied.

Table 3

RECOMMENDED SOLDERING PAD DIMENSIONS in millimeters			
CASE CODE	a	b	c
0810	3.5	2.5	3.0
1010	4.3	2.5	4.0
1014	4.3	2.5	4.0




Fig.3 Recommended solder pad dimensions

AS A GENERAL PRINCIPLE, TEMPERATURE AND DURATION SHALL BE THE **MINIMUM** NECESSARY REQUIRED TO ENSURE GOOD SOLDERING CONNECTIONS. HOWEVER, THE SPECIFIED MAXIMUM CURVES SHOULD NEVER BE EXCEEDED.

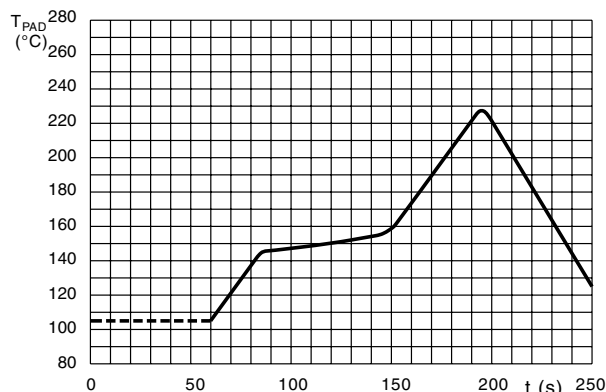


Fig.4 Maximum temperature load during infrared reflow soldering measured on the soldering pad

Aluminum Capacitors
SMD (Chip), Very Low Z

Vishay BCcomponents

ELECTRICAL DATA

SYMBOL	DESCRIPTION
C_R	rated capacitance at 100 Hz, tolerance $\pm 20\%$
I_R	rated RMS ripple current at 100 kHz, 105 °C
I_{L2}	max. leakage current after 2 minutes at U_R
$\tan \delta$	max. dissipation factor at 100 Hz
Z	max. impedance at 100 kHz

Note

Unless otherwise specified, all electrical values in Table 4 apply at
 $T_{amb} = 20\text{ °C}$, $P = 86$ to 106 kPa , $RH = 45$ to 75% .

Table 4

ELECTRICAL DATA AND ORDERING INFORMATION

U_R (V)	C_R (mF)	NOMINAL CASE SIZE L x W x H (mm)	I_R 105 °C 100 kHz (mA)	I_{L2} 2 min (mA)	$\tan \delta$ 100 Hz	Z 100 kHz (Ω)	ORDERING CODE MAL2150.....
6.3	470	8 x 8 x 10	435	30	0.24	0.25	95311E3
	1000	10 x 10 x 10	670	63	0.24	0.13	95301E3
10	330	8 x 8 x 10	435	33	0.20	0.25	95411E3
	470	8 x 8 x 10	435	47	0.20	0.25	95412E3
	680	10 x 10 x 10	670	68	0.20	0.13	95401E3
	1000	10 x 10 x 14	850	100	0.20	0.10	95402E3
16	220	8 x 8 x 10	435	35	0.16	0.25	95511E3
	330	8 x 8 x 10	435	53	0.16	0.25	95512E3
	470	10 x 10 x 10	670	75	0.16	0.13	95501E3
	680	10 x 10 x 14	850	109	0.16	0.10	95502E3
25	150	8 x 8 x 10	420	38	0.14	0.28	95611E3
	220	8 x 8 x 10	420	55	0.14	0.28	95612E3
	330	10 x 10 x 10	640	83	0.14	0.14	95601E3
	470	10 x 10 x 14	820	118	0.14	0.11	95602E3
35	100	8 x 8 x 10	405	35	0.12	0.30	95011E3
	220	10 x 10 x 10	630	77	0.12	0.15	95001E3
	330	10 x 10 x 14	790	116	0.12	0.12	95002E3
50	68	8 x 8 x 10	333	34	0.12	0.48	95111E3
	100	10 x 10 x 10	490	50	0.12	0.24	95101E3
	220	10 x 10 x 14	620	110	0.12	0.19	95102E3
63	33	8 x 8 x 10	270	21	0.10	0.65	95812E3
	47	8 x 8 x 10	270	30	0.10	0.65	95811E3
	47	10 x 10 x 10	390	30	0.10	0.38	95801E3
	68	10 x 10 x 10	390	43	0.10	0.38	95802E3
	100	10 x 10 x 14	507	63	0.10	0.29	95803E3

ADDITIONAL ELECTRICAL DATA

PARAMETER	CONDITIONS	VALUE
VOLTAGE		
Surge voltage for short periods	IEC 60384-18, subclause 4.14	$U_S \leq 1.15 \times U_R$
Reverse voltage for short periods	IEC 60384-18, subclause 4.16	$U_{rev} \leq 1\text{ V}$
CURRENT		
Leakage current	after 2 minutes at U_R	$I_{L2} \leq 0.01 \times C_R \times U_R$
INDUCTANCE		
Equivalent series inductance (ESL)		typ. 16 nH
RESISTANCE		
Equivalent series resistance (ESR) at 100 Hz	calculated from $\tan \delta_{max}$ and C_R (see Table 4)	$ESR = \tan \delta / 2 \pi f C_R$

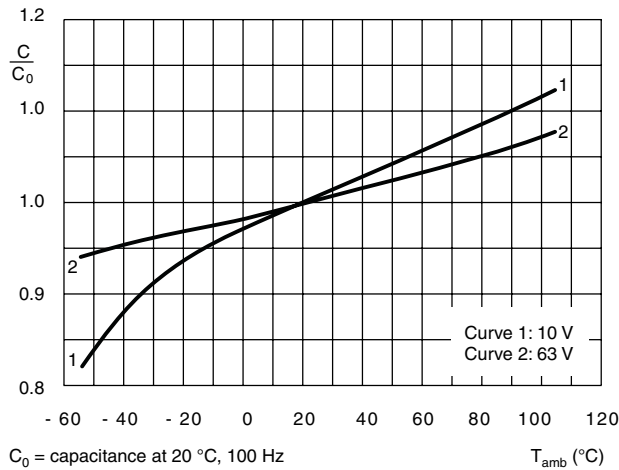
CAPACITANCE (C)

Fig.5 Typical multiplier of capacitance as a function of ambient temperatures

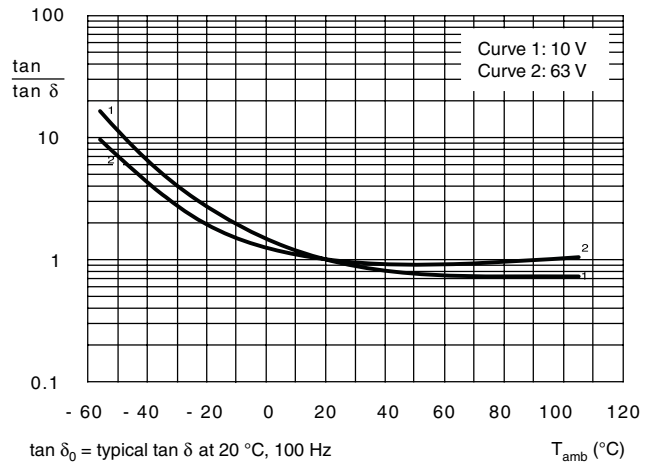
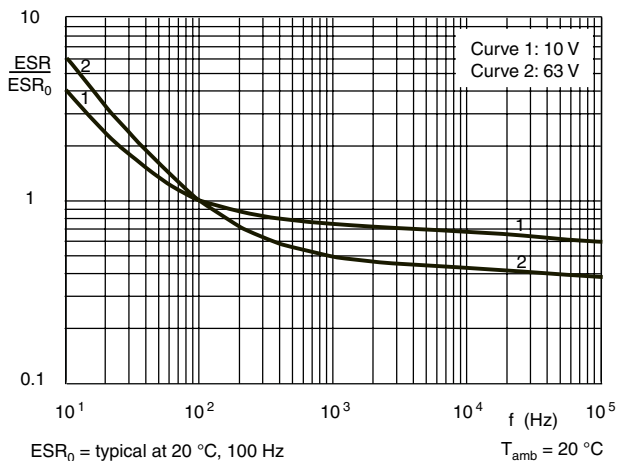
DISSIPATION FACTOR ($\tan \delta$)Fig.6 Typical multiplier of dissipation factor ($\tan \delta$) as a function of ambient temperatures**EQUIVALENT SERIES RESISTANCE (ESR)**

Fig.7 Typical multiplier of ESR as a function of frequency

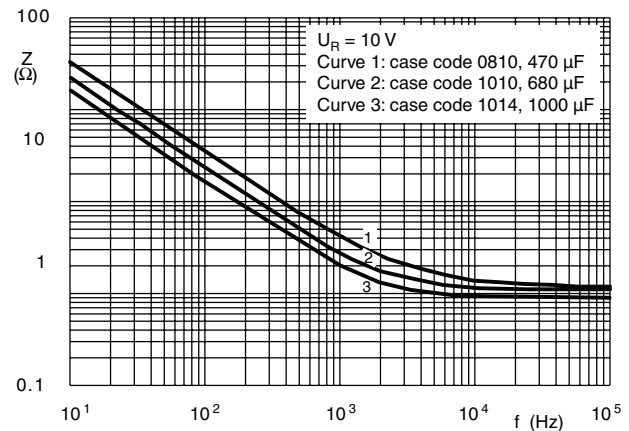
IMPEDANCE (Z)

Fig.8 Typical impedance as a function of frequency

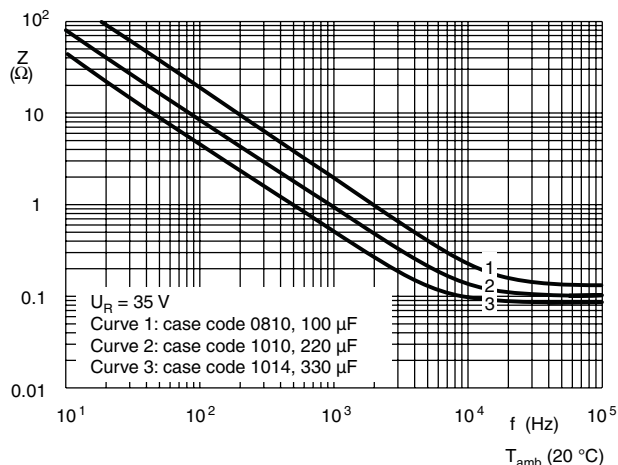


Fig.9 Typical impedance as a function of frequency

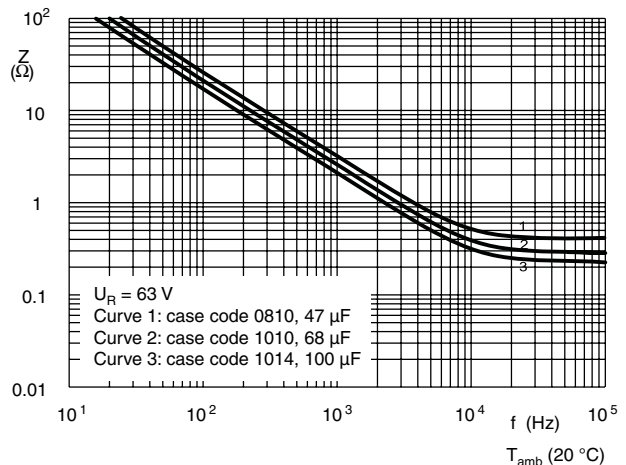


Fig.10 Typical impedance as a function of frequency

RIPPLE CURRENT AND USEFUL LIFE

I_A = actual ripple current at 100 kHz
 I_R = rated ripple current at 100 kHz, 105 °C
 (1) = useful life at 105 °C and I_R applied:
 case code ≤ 1010 : 2500 h
 case code = 1014 : 3000 h

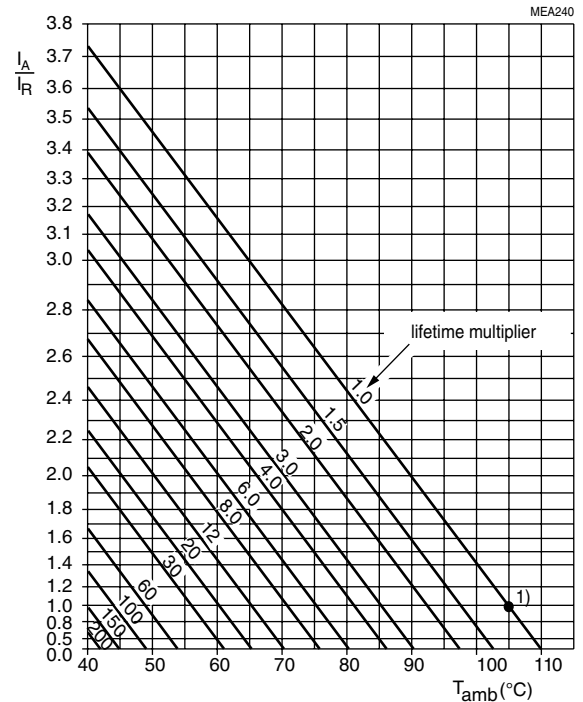


Fig.11 Multiplier of useful life as a function of ambient temperature and ripple current load

MULTIPLIER OF RIPPLE CURRENT (I_R) AS A FUNCTION OF FREQUENCY			
FREQUENCY (Hz)	I_R MULTIPLIER		
	$U_R = 6.3 \text{ to } 25 \text{ V}$	$U_R = 35 \text{ V}$	$U_R = 50 \text{ to } 63 \text{ V}$
100	0.70	0.65	0.60
300	0.80	0.80	0.75
1000	0.85	0.85	0.85
3000	0.93	0.93	0.93
10 000	0.95	0.95	0.95
30 000	0.97	0.97	0.97
100 000	1.00	1.00	1.00

TEST PROCEDURES AND REQUIREMENTS

TEST		PROCEDURE (quick reference)	REQUIREMENTS
NAME OF TEST	REFERENCE		
Mounting	IEC 60384-18, subclause 4.3	shall be performed prior to tests mentioned below; reflow soldering; for maximum temperature load refer to chapter "Mounting"	$\Delta C/C: \pm 5 \%$ $\tan \delta \leq \text{spec. limit}$ $I_{L2} \leq \text{spec. limit}$
Endurance	IEC 60384-18/ CECC32300, subclause 4.15	$T_{\text{amb}} = 105 \text{ }^{\circ}\text{C}$; U_R applied; 2000 hours	$U_R = 6.3 \text{ V}$; $\Delta C/C: \pm 25 \%$ $U_R \geq 10 \text{ V}$; $\Delta C/C: \pm 20 \%$ $\tan \delta \leq 2 \times \text{spec. limit}$ $I_{L2} \leq \text{spec. limit}$
Useful life	CECC 30301, subclause 1.8.1	$T_{\text{amb}} = 105 \text{ }^{\circ}\text{C}$; U_R and I_R applied; case size $\leq 10 \times 10 \times 10$: 2500 hours case size $= 10 \times 10 \times 14$: 3000 hours,	$\Delta C/C: \pm 50 \%$ $\tan \delta \leq 3 \times \text{spec. limit}$ $I_{L2} \leq \text{spec. limit}$ no short or open circuit total failure percentage: $\leq 1 \%$
Shelf life (storage at high temperature)	IEC 60384-18/ CECC32300, subclause 4.17	$T_{\text{amb}} = 105 \text{ }^{\circ}\text{C}$; no voltage applied; 1000 hours after test: U_R to be applied for 30 minutes, 24 to 48 hours before measurement	for requirements see 'Endurance test' above



Disclaimer

All product specifications and data are subject to change without notice.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

Vishay disclaims any and all liability arising out of the use or application of any product described herein or of any information provided herein to the maximum extent permitted by law. The product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein, which apply to these products.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications unless otherwise expressly indicated. Customers using or selling Vishay products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Vishay for any damages arising or resulting from such use or sale. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.