


Aluminum Capacitors



FEATURES

- Polarized aluminum electrolytic capacitors
- SMD style
- High CU-product
- Miniature dimension
- Reflow soldering
- RoHS compliant



RoHS
COMPLIANT

QUICK REFERENCE DATA

DESCRIPTION	UNIT	VALUE
Nominal case size (Ø D x L)	mm	4 x 5.3 to 12.5 x 13.5
Rated capacitance range C _R	µF	0.10 to 2200
Capacitance tolerance	%	± 20
Rated voltage range	V	6.3 to 100
Category temperature range	°C	- 40 to + 85
Load life	h	2000
Based on sectional specification		IEC 60384-4/EN 130300
Climatic category IEC 60068		40/105/56

APPLICATIONS

- General use
- Consumer electronics
- Low-headroom, height restricted low mass units
- Filtering, smoothing, coupling

PACKAGING

- Supplied in blister tape

SELECTION CHART FOR C_R, U_R AND RELEVANT NOMINAL CASE SIZES (Ø D x L in mm)

C _R (µF)	RATED VOLTAGE (V)							
	6.3	10	16	25	35	50	63	100
0.10	→	→	→	→	→	4 x 5.3	-	-
0.22	→	→	→	→	→	4 x 5.3	-	-
0.33	→	→	→	→	→	4 x 5.3	-	-
0.47	→	→	→	→	→	4 x 5.3	-	-
1.0	→	→	→	→	→	4 x 5.3	-	-
2.2	→	→	→	→	→	4 x 5.3	→	5 x 5.3
3.3	→	→	→	→	→	4 x 5.3	→	6.3 x 5.8
4.7	→	→	→	→	→	5 x 5.3	→	6.3 x 5.8
10	→	→	→	→	4 x 5.3	5 x 5.3	6.3 x 5.8	8 x 10
22	→	→	→	5 x 5.3	→	6.3 x 5.3	8 x 6.2	8 x 10
33	→	→	→	5 x 5.3	6.3 x 5.3	6.3 x 7.7	8 x 10	10 x 10
47	→	→	5 x 5.3	6.3 x 5.3	8 x 6.2	8 x 10	→	10 x 10
68	→	→	→	→	→	→	→	12.5 x 13.5
100	5 x 5.3	→	6.3 x 5.3	8 x 6.2	8 x 10	10 x 10	→	12.5 x 13.5
220	→	8 x 6.2	6.3 x 7.7	8 x 10	→	10 x 10	12.5 x 13.5	-
330	6.3 x 7.7	→	8 x 10	→	10 x 10	12.5 x 13.5	-	-
470	→	8 x 10	→	10 x 10	12.5 x 13.5	-	-	-
1000	8 x 10	10 x 10	→	12.5 x 13.5	-	-	-	-
1500	10 x 10	→	12.5 x 13.5	-	-	-	-	-
2200	→	12.5 x 13.5	-	-	-	-	-	-

DIMENSIONS in millimeters									
CASE SIZE CODE	D ± α	L ± α	A ± α	B ± α	C ± α	E ± α	R	N	P
BB	4 ± 0.5	5.3 ± 0.2	1.9 ± 0.2	4.3 ± 0.2	4.3 ± 0.2	1.0 ± 0.2	0.5 ~ 0.8	0.3	0.5
BC	5 ± 0.5	5.3 ± 0.2	2.3 ± 0.2	5.3 ± 0.2	5.3 ± 0.2	1.4 ± 0.2	0.5 ~ 0.8	0.3	0.5
BD	6.3 ± 0.5	5.3 ± 0.3	2.4 ± 0.2	6.6 ± 0.2	6.6 ± 0.2	2.2 ± 0.2	0.5 ~ 0.8	0.3	0.5
AD	6.3 ± 0.5	5.8 ± 0.3	2.4 ± 0.2	6.6 ± 0.2	6.6 ± 0.2	2.2 ± 0.2	0.5 ~ 0.8	0.3	0.5
BM	6.3 ± 0.5	7.7 ± 0.4	2.4 ± 0.2	6.6 ± 0.2	6.6 ± 0.2	2.2 ± 0.2	0.5 ~ 0.8	0.3	0.5
AE	8 ± 0.5	6.2 ± 0.4	3.3 ± 0.2	8.3 ± 0.2	8.3 ± 0.2	2.3 ± 0.2	0.5 ~ 0.8	0.3	0.5
AF	8 ± 0.5	10 ± 0.5	2.9 ± 0.2	8.3 ± 0.2	8.3 ± 0.2	3.1 ± 0.2	0.8 ~ 1.1	0.3	0.5
AG	10 ± 0.5	10 ± 0.5	3.2 ± 0.2	10.3 ± 0.2	10.3 ± 0.2	4.5 ± 0.2	0.8 ~ 1.1	0.3	0.5
AH	12.5 ± 0.5	13.5 ± 0.5	4.6 ± 0.2	12.8 ± 0.2	12.8 ± 0.2	4.5 ± 0.2	1.1 ~ 1.4	0.3	0.5
AK	16 ± 0.5	16.5 ± 0.5	5.6 ± 0.2	16.8 ± 0.2	16.8 ± 0.2	6.5 ± 0.2	1.1 ~ 1.4	0.3	0.5

ELECTRICAL DATA	
SYMBOL	DESCRIPTION
U_R	rated voltage
C_R	rated capacitance at 120 Hz
$\tan \delta$	max. dissipation factor at 120 Hz
R_{ESR}	max. equivalent series resistance at 120 Hz
I_R	rated alternating current at 120 Hz and upper category temperature

Note

Unless otherwise specified, all electrical values apply at $T_{amb} = 20^\circ\text{C}$, $P = 80$ to 120 kPa, $RH = 45$ to 75% .

ORDERING EXAMPLE

ECA 33 $\mu\text{F}/25$ V, $\pm 20\%$, size 5 x 5.3 mm


Ordering code: MALSECA00BC233EARK

For Standard Packaging Quantity (SPQ) and Minimum Order Quantity (MOQ) please refer to our price list or contact customer service.

ELECTRICAL DATA AND ORDERING INFORMATION							
U_R (V)	C_R 120 Hz (μF)	DIMENSIONS $D \times L$ (mm)	$\tan \delta$ 120 Hz	R_{ESR} 120 Hz (Ω)	I_R 120 Hz/85 °C (mA)	WEIGHT (g)	CATALOG NUMBER
6.3	100	5 x 5.3	0.28	3.71	60	0.17	MALSECA00BC310BARK
	330	6.3 x 7.7	0.35	1.41	188	0.40	MALSECA00BM333BARK
	1000	8 x 10	0.35	0.46	370	1.00	MALSECA00AF410BARK
	1500	10 x 10	0.35	0.31	480	1.25	MALSECA00AG415BARK
10	220	8 x 6.2	0.24	1.45	175	0.55	MALSECA00AE322CARK
	470	8 x 10	0.24	0.68	290	1.00	MALSECA00AF347CARK
	1000	10 x 10	0.24	0.32	454	1.25	MALSECA00AG410CARK
	2200	12.5 x 13.5	0.24	0.14	960	2.50	MALSECA00AH422CARK

ELECTRICAL DATA AND ORDERING INFORMATION

U_R (V)	C_R 120 Hz (μF)	DIMENSIONS D x L (mm)	tan δ 120 Hz	R_{ESR} 120 Hz (Ω)	I_R 120 Hz/85 °C (mA)	WEIGHT (g)	CATALOG NUMBER
16	47	5 x 5.3	0.20	5.64	52	0.17	MALSECA00BC247DARK
	100	6.3 x 5.3	0.20	2.65	88	0.27	MALSECA00BD310DARK
	220	6.3 x 7.7	0.24	1.45	162	0.40	MALSECA00BM322DARK
	330	8 x 10	0.24	0.96	270	1.00	MALSECA00AF333DARK
	1500	12.5 x 13.5	0.24	0.21	870	2.50	MALSECA00AH415DARK
25	22	5 x 5.3	0.13	7.84	41	0.17	MALSECA00BC222EARK
	33	5 x 5.3	0.13	5.22	50	0.17	MALSECA00BC233EARK
	47	6.3 x 5.3	0.13	3.67	70	0.27	MALSECA00BD247EARK
	100	8 x 6.2	0.16	2.12	145	0.55	MALSECA00AE310EARK
	220	8 x 10	0.16	0.96	232	1.00	MALSECA00AF322EARK
	470	10 x 10	0.16	0.45	400	1.25	MALSECA00AG347EARK
	1000	12.5 x 13.5	0.16	0.21	820	2.50	MALSECA00AH410EARK
35	10	4 x 5.3	0.15	19.9	27	0.12	MALSECA00BB210FARK
	33	6.3 x 5.3	0.15	6.03	65	0.27	MALSECA00BD233FARK
	47	8 x 6.2	0.15	4.23	105	0.55	MALSECA00AE247FARK
	100	8 x 10	0.15	1.99	175	1.00	MALSECA00AF310FARK
	330	10 x 10	0.15	0.60	360	1.25	MALSECA00AG333FARK
	470	12.5 x 13.5	0.15	0.42	600	2.50	MALSECA00AH347FARK
50	0.10	4 x 5.3	0.10	1326	3.2	0.12	MALSECA00BB010HARK
	0.22	4 x 5.3	0.10	602.9	4.7	0.12	MALSECA00BB022HARK
	0.33	4 x 5.3	0.10	401.9	5.7	0.12	MALSECA00BB033HARK
	0.47	4 x 5.3	0.10	282.2	6.8	0.12	MALSECA00BB047HARK
	1.0	4 x 5.3	0.10	132.6	10	0.12	MALSECA00BB110HARK
	2.2	4 x 5.3	0.10	60.3	15	0.12	MALSECA00BB122HARK
	3.3	4 x 5.3	0.10	40.2	18	0.12	MALSECA00BB133HARK
	4.7	5 x 5.3	0.10	28.2	25	0.17	MALSECA00BC147HARK
	10	5 x 5.3	0.10	13.2	41	0.17	MALSECA00BC210HARK
	22	6.3 x 5.3	0.10	6.03	71	0.27	MALSECA00BD222HARK
	33	6.3 x 7.7	0.12	4.82	94	0.40	MALSECA00BM233HARK
	47	8 x 10	0.12	3.39	140	1.00	MALSECA00AF247HARK
	100	10 x 10	0.12	1.59	195	1.25	MALSECA00AG310HARK
	220	10 x 10	0.12	0.72	320	1.25	MALSECA00AG322HARK
	330	12.5 x 13.5	0.12	0.48	600	2.50	MALSECA00AH333HARK
63	10	6.3 x 5.8	0.12	15.9	46	0.30	MALSECA00AD210JARK
	22	8 x 6.2	0.12	7.23	96	0.55	MALSECA00AE222JARK
	33	8 x 10	0.12	4.82	117	1.00	MALSECA00AF233JARK
	220	12.5 x 13.5	0.12	0.72	550	2.50	MALSECA00AH322JARK
100	2.2	5 x 5.3	0.12	72.35	20	0.17	MALSECA00BC122LARK
	3.3	6.3 x 5.8	0.12	48.2	29	0.30	MALSECA00AD133LARK
	4.7	6.3 x 5.8	0.12	33.9	35	0.30	MALSECA00AD147LARK
	10	8 x 10	0.12	15.9	77	1.00	MALSECA00AF210LARK
	22	8 x 10	0.12	7.23	100	1.00	MALSECA00AF222LARK
	33	10 x 10	0.12	4.82	130	1.25	MALSECA00AG233LARK
	47	10 x 10	0.12	3.39	155	1.25	MALSECA00AG247LARK
	68	12.5 x 13.5	0.12	2.34	350	2.50	MALSECA00AH268LARK
	100	12.5 x 13.5	0.12	1.59	420	2.50	MALSECA00AH310LARK

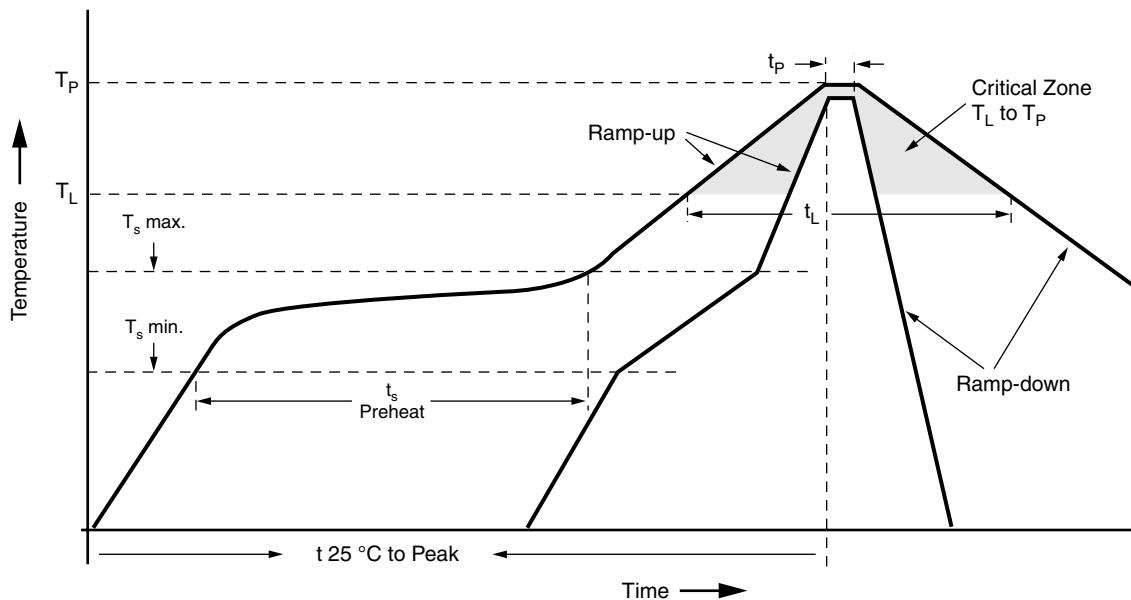REFLOW SOLDERING CONDITIONS FOR SMD ALUMINUM ELECTROLYTIC CAPACITORS


PROFILE FEATURE		SOLDERING CONDITION		
		$\varnothing 4 \sim \varnothing 10$	$\varnothing 12.5$	$\varnothing 16$
Average ramp-up rate (T_l to T_p)		3 °C/s max.		3 °C/s max.
Preheat				
Temperature min. ($T_s \text{ min.}$)		150 °C		150 °C
Temperature max. ($T_s \text{ max.}$)		200 °C		200 °C
Time ($T_s \text{ min.}$ to $T_s \text{ max.}$)		60 ~ 150 s	40 ~ 120 s	40 ~ 100 s
$T_s \text{ max.}$ to T_l				
Ramp-up rate		3 °C/s max.		3 °C/s max.
Time maintained above				
Temperature (T_l)		217 °C		217 °C
Time (t_l)		60 ~ 90 s		40 ~ 60 s
Peak/classification temperature (T_p)		250 °C	240 °C	230 °C
Time within 5 °C of actual peak temperature (T_p)		10 s max.		10 s max.
Ramp-down rate		3 °C/s max.		3 °C/s max.
Time 25 °C to peak temperature		8 min max.		8 min max.

RESISTANCE TO SOLDERING HEAT	
Leakage current	Less than specified value
Capacitance value	Within $\pm 10\%$ of initial value
$\tan \delta$	Less than specified value

LOW TEMPERATURE BEHAVIOR (at 120 Hz)

IMPEDANCE RATIO (Z) T2/(Z) T1	RATED VOLTAGE (V)							
	6.3	10	16	25	35	50	63	100
T2/T1	6.3	10	16	25	35	50	63	100
- 25 °C/+ 20 °C	5	4	3	2	2	2	2	2
- 40 °C/+ 20 °C	10	8	6	4	3	3	3	3

ADDITIONAL ELECTRICAL DATA

PARAMETER	CONDITIONS	VALUE
Current		
Leakage current (Test conditions: U _R , 20 °C)	After 2 min at U _R	I _{L2} ≤ 0.01 × C _R × U _R or 3 µA for U _R ≤ 100 V (whichever is greater)
Resistance		
Equivalent series resistance (ESR)	Calculated from tan δ _{max} .	ESR = tan δ/2 π f C _R

MULTIPLIER OF RIPPLE CURRENT (I_R) AS A FUNCTION OF FREQUENCY

FREQUENCY (Hz)	I _R MULTIPLIER FOR U _R ≤ 100 V
50	0.70
120	1.00
300	1.17
1000	1.36
≥ 10 000	1.50

TEST PROCEDURES AND REQUIREMENTS

TEST	PROCEDURE (QUICK REFERENCE)	REQUIREMENTS
Load life	T _{amb} = 85 °C U _R and I _R applied After 2000 h	ΔC/C: ± 20 % of initial value I _L ≤ spec. limit tan δ ≤ 2 × spec. limit
Shelf life	No voltage applied After 1000 h After test: U _R to be applied for 30 min 24 to 48 h before measurement	ΔC/C: ± 20 % of initial value I _L ≤ spec. limit tan δ ≤ 2 × spec. limit



Disclaimer

All product specifications and data are subject to change without notice.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

Vishay disclaims any and all liability arising out of the use or application of any product described herein or of any information provided herein to the maximum extent permitted by law. The product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein, which apply to these products.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications unless otherwise expressly indicated. Customers using or selling Vishay products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Vishay for any damages arising or resulting from such use or sale. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.