

Inductors, Subminiature, Shielded

Subminiature, Shielded



STANDARD ELECTRICAL SPECIFICATIONS								
MODEL	IND. (μH)	TOL.	Q MIN.	TEST FREQ. (MHz)	SRF MIN. (MHz)	DCR MAX. (Ohms)	RATED DC CURRE	INCR.* CURRENT (mA)
IMS-2WWD-40	0.10	± 10 %	42	25	> 400	0.112	1720	> 1720
IMS-2WWD-40	0.12	± 10 %	42	25	> 400	0.126	1630	> 1630
IMS-2WWD-40	0.15	± 10 %	42	25	> 400	0.138	1550	> 1550
IMS-2WWD-40	0.18	± 10 %	42	25	366	0.165	1420	> 1420
IMS-2WWD-40	0.22	± 10 %	42	25	331	0.198	1330	> 1330
IMS-2WWD-40	0.27	± 10 %	42	25	298	0.220	1230	> 1230
IMS-2WWD-40	0.33	± 10 %	42	25	288	0.258	1140	> 1140
IMS-2WWD-40	0.39	± 10 %	42	25	271	0.292	1060	> 1060
IMS-2WWD-40	0.47	± 10 %	41	25	247	0.360	960	> 960
IMS-2WWD-40	0.56	± 10 %	39	25	236	0.397	915	> 915
IMS-2WWD-40	0.68	± 10 %	36	25	216	0.472	840	> 840
IMS-2WWD-40	0.82	± 10 %	35	25	200	0.638	720	> 720
IMS-2WWD-40	1.0	± 10 %	42	25	136	0.208	1260	> 1260
IMS-2WWD-40	1.2	± 10 %	38	7.9	120	0.225	1210	> 1210
IMS-2WWD-40	1.5	± 10 %	38	7.9	111	0.265	1120	> 1120
IMS-2WWD-40	1.8	± 10 %	38	7.9	103	0.285	1080	> 1080
IMS-2WWD-40	2.2	± 10 %	36	7.9	94	0.330	1000	> 1000
IMS-2WWD-40	2.7	± 10 %	38	7.9	85	0.381	935	> 935
IMS-2WWD-40	3.3	± 10 %	38	7.9	78	0.432	875	> 875
IMS-2WWD-40	3.9	± 10 %	40	7.9	73	0.576	755	> 755
IMS-2WWD-40	4.7	± 10 %	42	7.9	66	0.787	650	> 650
IMS-2WWD-40	5.6	± 10 %	42	7.9	62	1.04	565	> 565
IMS-2WWD-40	6.8	± 10 %	45	7.9	54	1.40	485	> 485
IMS-2WWD-40	8.2	± 10 %	47	7.9	50	1.68	440	> 440
IMS-2WWD-40	10	± 10 %	51	7.9	44	2.58	355	> 355
IMS-2WWD-40	12	± 10 %	51	2.5	39	3.65	300	> 300
IMS-2WWD-40	15	± 10 %	45	2.5	44	0.862	620	200
IMS-2WWD-40	18	± 10 %	43	2.5	40	1.02	570	175
IMS-2WWD-40	22	± 10 %	42	2.5	36	1.12	545	160
IMS-2WWD-40	27	± 10 %	37	2.5	33	1.28	510	155
IMS-2WWD-40	33	± 10 %	46	2.5	30	1.70	440	150
IMS-2WWD-40	39	± 10 %	38	2.5	26	1.99	405	145
IMS-2WWD-40	47	± 10 %	42	2.5	23	2.41	370	140
IMS-2WWD-40	56	± 10 %	41	2.5	22	2.85	340	130
IMS-2WWD-40	68	± 10 %	46	2.5	18	3.21	320	120
IMS-2WWD-40	82	± 10 %	46	2.5	17	3.57	305	115
IMS-2WWD-40	100	± 10 %	43	2.5	15	4.10	280	100
IMS-2WWD-40	120	± 10 %	50	0.79	13	5.97	235	80
IMS-2WWD-40	150	± 10 %	49	0.79	12	7.05	215	68
IMS-2WWD-40	180	± 10 %	56	0.79	11	8.12	200	64
IMS-2WWD-40	220	± 10 %	53	0.79	10	14.8	150	60
IMS-2WWD-40	270	± 10 %	57	0.79	9	16.8	140	58
IMS-2WWD-40	330	± 10 %	57	0.79	8.5	18.6	130	56
IMS-2WWD-40	390	± 10 %	57	0.79	8	21.1	120	54
IMS-2WWD-40	470	± 10 %	50	0.79	7	32.2	100	52
IMS-2WWD-40	560	± 10 %	50	0.79	6	36.4	95	50
IMS-2WWD-40	680	± 10 %	56	0.79	5.5	41.1	90	48
IMS-2WWD-40	820	± 10 %	49	0.79	5	45.0	85	47
IMS-2WWD-40	1000	± 10 %	49	0.79	4.5	52.0	80	45

* **Incremental Current:** The DC current required to cause a 5 % reduction in the nominal inductance value.

FEATURES

- Classification is Grade 2, Class B
- Inductance range is 0.10 μH to 1000 μH
- High inductance-to-size ratio
- 0.133" [3.38 mm] diameter by 0.335" [8.51 mm] length
- Subminiature shielded inductor
- Solves special problems in density circuit application



RoHS
COMPLIANT

ELECTRICAL SPECIFICATIONS

Inductance Tolerance: ± 10 % on Q-Meter

Dielectric Strength: 700 VRMS at sea level

Operating Temperature: - 55 °C to + 125 °C

Self-Resonant Frequency: Minimum SRF measured with full length leads on Grid-Dip Meter

Rating: Maximum current based on 1/3 watt dissipation

MECHANICAL SPECIFICATIONS


Terminal Strength: Meets 5 pound pull test

DENSITY SPECIFICATIONS

Weight: 0.50 gram maximum

Shielding: Less than 3 % coupling with two units mounted side by side at 1000 cycles

DIMENSIONS in inches [millimeters]

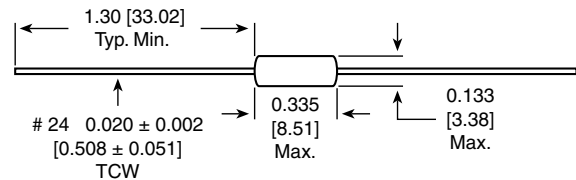


MARKING

- Color coded



ORDERING INFORMATION				
IMS-2WWD-40	0.10 μ H	10 %	ER	e2
MODEL	INDUCTANCE VALUE	INDUCTANCE TOLERANCE	PACKAGE CODE	JEDEC LEAD (Pb)-FREE STANDARD

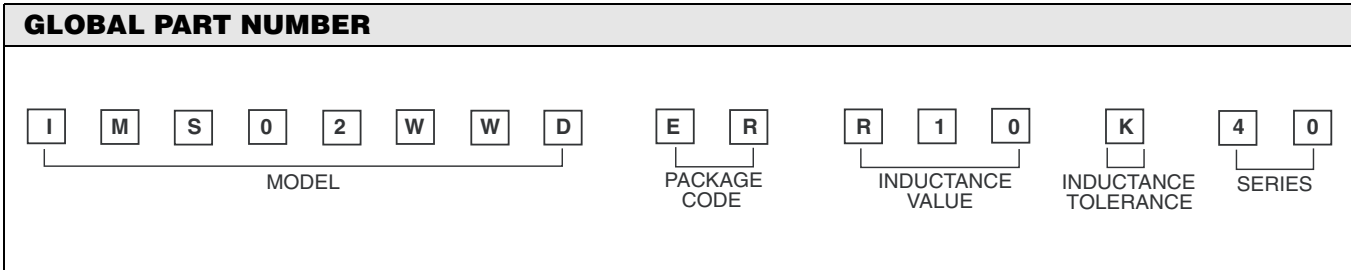



Disclaimer

All product specifications and data are subject to change without notice.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

Vishay disclaims any and all liability arising out of the use or application of any product described herein or of any information provided herein to the maximum extent permitted by law. The product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein, which apply to these products.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications unless otherwise expressly indicated. Customers using or selling Vishay products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Vishay for any damages arising or resulting from such use or sale. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.