

**INTRODUCTION:**

Adam Tech DMH & DMF Series Power Connectors consist of a receptacle and plug set in a variety of single and multiple row configurations with .165" centerlines. They are manufactured of Nylon 6/6 with a flammability rating of UL94V-2 or UL94V-0. This series is designed as a mated set with a PCB mounted header and a wire mounted socket which securely latches to header when mated. Our specially designed bodies provide polarization to eliminate mismatching and our latching system resists heavy vibration. PCB mounted headers have molded pegs which align and brace the PCB tails for trouble free assembly and use.

**FEATURES:**

- High current rating
- Polarized and Positive locking
- Vibration resistant
- Compatible with Wide Range of wires
- Industry standard compatible

**SPECIFICATIONS:**

**Material:**

Insulator: Nylon 66, rated UL94V-2  
 Insulator Color: Natural or Black  
 Contacts: Brass, tin plated

**Electrical:**

Operating voltage: 300V AC / DC max.  
 Current Rating: 5 Amps max  
 Insulation resistance: 1000 MΩ min.  
 Dielectric withstanding voltage: 1500V AC for 1 minute

**Temperature Rating:**


Operating temperature: -40°C to +125°C

**PACKAGING:**


Anti-ESD plastic bags

**SAFETY AGENCY APPROVALS:**


UL Recognized File No. E224053  
 CSA Certified File No. LR1578596

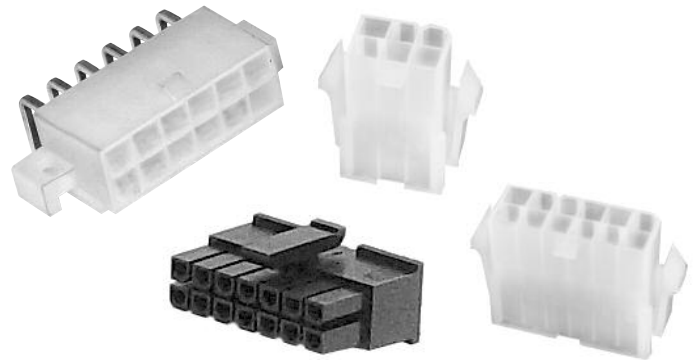

**ORDERING INFORMATION  
FEMALE WIRE HOUSING**

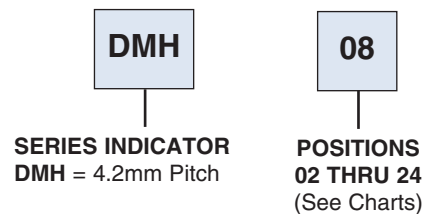

**ORDERING INFORMATION  
MALE PCB HOUSING**

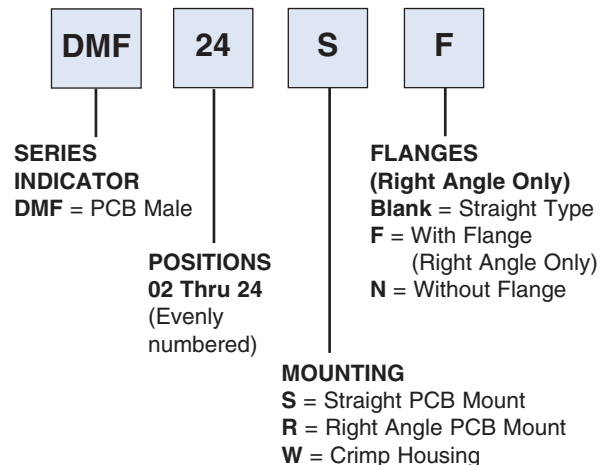

**OPTIONS:**

Add designator(s) to end of part number  
 P = PCB Peg

