

M3T-FLX-DCT503

Board for Converting Pin Assignments to Connect the M37515T-RPD
(for 7515 Group)

Function


The emulation pod (M37515T-RPD) for the 7515 Group of Renesas 8-bit MCUs has a 64-core flexible cable board (FLX64) attached at the probe tip. Therefore, this board is used to convert the 64-pin compatible probe tip to a 42-pin compatible pin assignment for the 3850 Group.

Application

Connect this board and the direct dummy IC (M3T-DCT42B-450) for 42-pin 0.8mm-pitch SSOP (42P2R-A) that is mounted on the target system. Then connect the tip of the emulation pod (M37515T-RPD) to the board.

Dimensions

25.0(D)×30.0(W)×10.0(H)mm

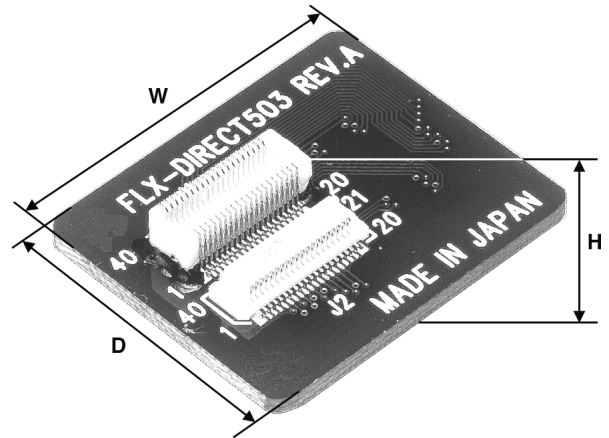

[Ordering Information] See Appendix H "Ordering Information".