


## HCMOS 14 pin DIL, kHz Range

- Package 14 pin DIL
- Frequency range: 20.0 to 50.0kHz; 32.768kHz
- Supply voltage 3.3 or 5.0 Volts
- Frequency stability from  $\pm 1$ ppm over -30 to +75°C
- RoHS compliant



### DESCRIPTION

EM14GT series TCXOs are packaged in a miniature 6 pad ceramic SMD package. With squarewave (CMOS) output, tolerances are available from  $\pm 1.0$ ppm over -30° to +75°C. The part has a 0.01 $\mu$ F decoupling capacitor built in.

### SPECIFICATION

|                               |   |  |
|-------------------------------|---|--|
| Product Series Code           | TCXO:   | EM14GT   |
|                               | VCTCXO:   | VEM14GT  |
| Frequency Range:              | 32.768kHz Standard frequency<br>20.0kHz to 50.0kHz  |  |
| Output Waveform:              | Squarewave  |  |
| Initial Calibration Tolerance |   |  |
|                               | Models with mech. trimmer:                          | <1.0ppm (at t. 25° $\pm$ 2°C)                                |
|                               | Models without trimmer:                             | <2.0ppm (at t. 25° $\pm$ 2°C)                                |
| Operating Temperature Range:  | See table   |  |
| Frequency Stability           |   |  |
|                               | vs. Ageing:   | $\pm 1.0$ ppm max. first year                                |
|                               | vs. Voltage Change:                                 | $\pm 0.3$ ppm max. $\pm 5\%$ change                          |
|                               | vs. Load Change:                                    | $\pm 0.3$ ppm max. $\pm 10\%$ change                         |
|                               | vs. Reflow:   | $\pm 1$ ppm max. for one reflow<br>(Measured after 24 hours) |
| Supply Voltage:               | +3.3 or +5.0Volts<br>(Specify when ordering)        |  |
| Output Logic Levels:          | Logic High: 90% Vdd min.<br>Logic Low: 10% Vdd max. |  |
| Rise and Fall Times:          | 10ns max.   |  |
| Duty Cycle:                   | 50% $\pm$ 5%  |  |
| Start-up Time:                | 2ms typical, 5ms max.                               |  |
| Current Consumption:          | See table below                                     |  |
| Output Load:                  | 15pF  |  |
| Storage Temperature:          | -55~+125°C  |  |

### FREQUENCY STABILITY


| Frequency Stability (ppm) |           | $\pm 0.5$ | $\pm 1.0$ | $\pm 1.5$ | $\pm 2.0$ | $\pm 2.5$ |
|---------------------------|-----------|-----------|-----------|-----------|-----------|-----------|
| Temperature Range (°C)    | 0 ~ +50   | ASK       | ✓         | ✓         | ✓         | ✓         |
|                           | -10 ~ +60 | x         | ✓         | ✓         | ✓         | ✓         |
|                           | -20 ~ +70 | x         | x         | ✓         | ✓         | ✓         |
|                           | -30 ~ +75 | x         | x         | x         | ✓         | ✓         |
|                           | -40 ~ +85 | x         | x         | x         | x         | ✓         |

✓ = available, x = not available, ASK = call Technical Sales

### CURRENT CONSUMPTION

| Frequency | +3.3 V |
|-----------|--------|
| 32.768kHz | 8.0mA  |
| 50kHz     | 12mA   |

### EM14GT - OUTLINES AND DIMENSIONS

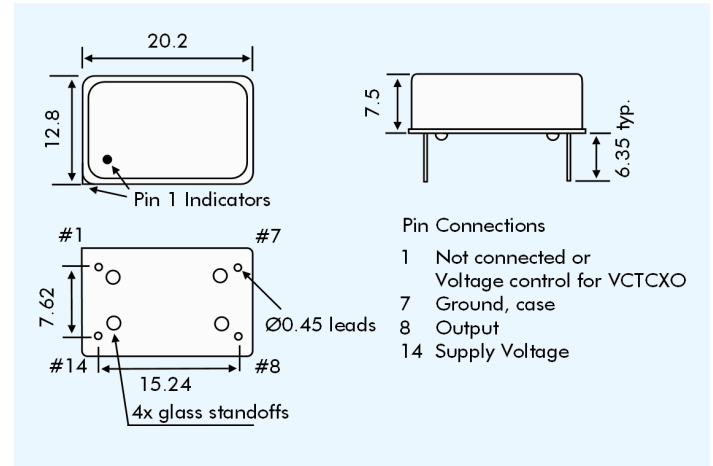

### VEM14GT VOLTAGE CONTROL SPECIFICATION

|                       |   |
|-----------------------|---|
| Control Voltage:      | Standard = +1.5 $\pm$ 1.0Volts for all input voltages. (Contact technical sales if +2.5 $\pm$ 2.0 Volts is required.) |
| Frequency Deviation:  | $\pm 6.0$ ppm min.  |
| Slope Polarity:       | Positive (increase of control voltage increases output frequency.)  |
| Input Impedance:      | 10k $\Omega$ min.   |
| Modulation Bandwidth: | 3.0kHz min. measured at -3dB  |
| Linearity:            | 10% max.  |

### PART NUMBERING PROCEDURE

Example: **EM14GT33-32.768k-2.5/-30+75**

Series Description  
 TCXO = EM14GT  
 VCTCXO = VEM14GT  
 Supply Voltage  
 33 = 3.3 VDC  
 5 = 5.0 VDC  
 Frequency (kHz)  
 Stability over OTR ( $\pm$ ppm)  
 Operating Temperature Range (OTR) (°C)  
 Lower and upper limits.