



# STU/D600S

SamHop Microelectronics Corp.

Aug 25, 2006

## N-Channel Enhancement Mode Field Effect Transistor

### PRODUCT SUMMARY

V <sub>DSS</sub>	I <sub>D</sub>	R <sub>DSON</sub> (mΩ) Max
60V	16A	55 @ V <sub>GS</sub> = 10V
		70 @ V <sub>GS</sub> = 4.5V

### FEATURES


- Super high dense cell design for low R<sub>DSON</sub>.
- Rugged and reliable.
- TO-252 and TO-251 Package.



STU SERIES  
TO-252AA(D-PAK)



STD SERIES  
TO-251(I-PAK)



### ABSOLUTE MAXIMUM RATINGS (T<sub>A</sub>=25°C unless otherwise noted)

Parameter	Symbol	Limit	Unit	
Drain-Source Voltage	V <sub>DS</sub>	60	V	
Gate-Source Voltage	V <sub>GS</sub>	±20	V	
Drain Current-Continuous <sup>a</sup> @ T <sub>A</sub>	25°C	ID	16	A
	70°C		10.7	A
-Pulsed <sup>b</sup>	I <sub>DM</sub>	30	A	
Drain-Source Diode Forward Current <sup>a</sup>	I <sub>S</sub>	15	A	
Maximum Power Dissipation <sup>a</sup>	T <sub>A</sub> = 25°C	P <sub>D</sub>	50	W
	T <sub>A</sub> = 70°C		35	
Operating Junction and Storage Temperature Range	T <sub>J</sub> , T <sub>STG</sub>	-55 to 175	°C	

### THERMAL CHARACTERISTICS

Thermal Resistance, Junction-to-Case	R <sub>θJC</sub>	3	°C/W
Thermal Resistance, Junction-to-Ambient	R <sub>θJA</sub>	50	°C/W

# STU/D600S

N-Channel ELECTRICAL CHARACTERISTICS (TA = 25 °C unless otherwise noted)

Parameter	Symbol	Condition	Min	Typ <sup>c</sup>	Max	Unit
<b>OFF CHARACTERISTICS</b>						
Drain-Source Breakdown Voltage	BV <sub>DSS</sub>	V <sub>GS</sub> = 0V, I <sub>D</sub> = 250µA	60			V
Zero Gate Voltage Drain Current	I <sub>DSS</sub>	V <sub>DS</sub> = 48V, V <sub>GS</sub> = 0V		1		µA
Gate-Body Leakage	I <sub>GSS</sub>	V <sub>GS</sub> = ±20V, V <sub>DS</sub> = 0V		±100		nA
<b>ON CHARACTERISTICS <sup>b</sup></b>						
Gate Threshold Voltage	V <sub>GS(th)</sub>	V <sub>DS</sub> = V <sub>GS</sub> , I <sub>D</sub> = 250µA	1.0	1.8	3.0	V
Drain-Source On-State Resistance	R <sub>DS(ON)</sub>	V <sub>GS</sub> = 10V, I <sub>D</sub> = 8A		45	55	m ohm
		V <sub>GS</sub> = 4.5V, I <sub>D</sub> = 4A		50	70	m ohm
On-State Drain Current	I <sub>D(ON)</sub>	V <sub>DS</sub> = 5V, V <sub>GS</sub> = 10V	20			A
Forward Transconductance	g <sub>F</sub>	V <sub>DS</sub> = 10V, I <sub>D</sub> = 8A		16		S
<b>DYNAMIC CHARACTERISTICS <sup>c</sup></b>						
Input Capacitance	C <sub>ISS</sub>	V <sub>DS</sub> = 30V, V <sub>GS</sub> = 0V f = 1.0MHz		670		pF
Output Capacitance	C <sub>OSS</sub>			72		pF
Reverse Transfer Capacitance	C <sub>RSS</sub>			45		pF
Gate resistance	R <sub>G</sub>	V <sub>GS</sub> = 0V, V <sub>DS</sub> = 0V, f = 1.0MHz		3.2		ohm
<b>SWITCHING CHARACTERISTICS <sup>c</sup></b>						
Turn-On Delay Time	t <sub>D(ON)</sub>	V <sub>DD</sub> = 30V I <sub>D</sub> = 8 A V <sub>GS</sub> = 10V R <sub>GEN</sub> = 3.3 ohm		13		ns
Rise Time	t <sub>r</sub>			10		ns
Turn-Off Delay Time	t <sub>D(OFF)</sub>			25		ns
Fall Time	t <sub>f</sub>			9		ns
Total Gate Charge	Q <sub>G</sub>	V <sub>DS</sub> = 30V, I <sub>D</sub> = 8A, V <sub>GS</sub> = 10V		14.2		nC
		V <sub>DS</sub> = 30V, I <sub>D</sub> = 8A, V <sub>GS</sub> = 4.5V		7		nC
Gate-Source Charge	Q <sub>GS</sub>	V <sub>DS</sub> = 30V, I <sub>D</sub> = 8A V <sub>GS</sub> = 10V		1.7		nC
Gate-Drain Charge	Q <sub>GD</sub>			3.8		nC

# STU/D600S

ELECTRICAL CHARACTERISTICS ( $T_c=25^\circ\text{C}$  unless otherwise noted)

Parameter	Symbol	Condition	Min	Typ	Max	Unit
DRAIN-SOURCE DIODE CHARACTERISTICS <sup>a</sup>						
Diode Forward Voltage	$V_{SD}$	$V_{GS} = 0V, I_S = 10A$			0.9	1.3

Notes

a.Pulse Test:Pulse Width  $\leq 300\mu\text{s}$ , Duty Cycle  $\leq 2\%$ .

b.Guaranteed by design, not subject to production testing.

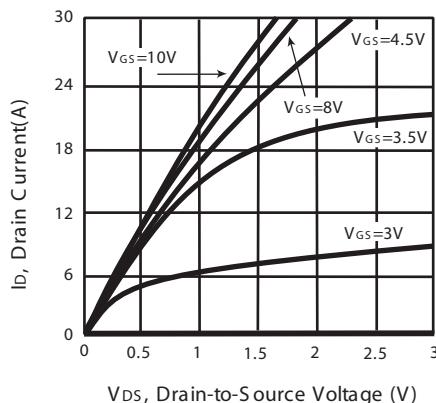


Figure 1. Output Characteristics

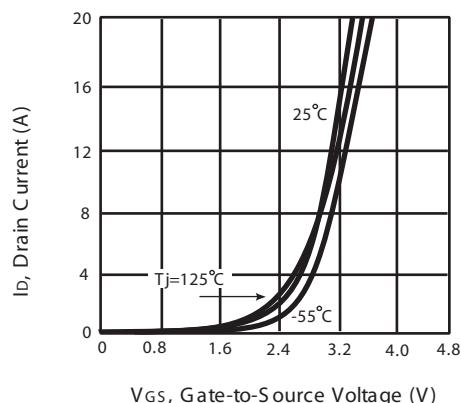


Figure 2. Transfer Characteristics

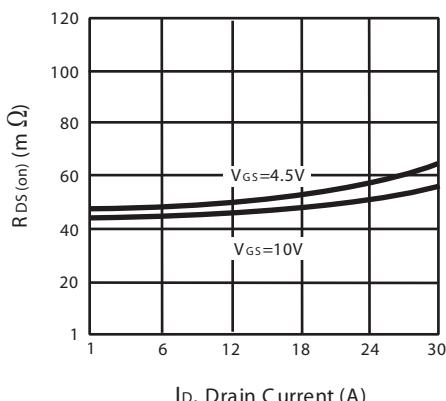


Figure 3. On-Resistance vs. Drain Current and Gate Voltage

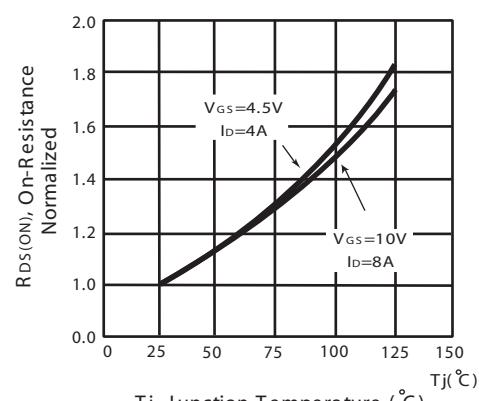


Figure 4. On-Resistance Variation with Drain Current and Temperature

# STU/D600S

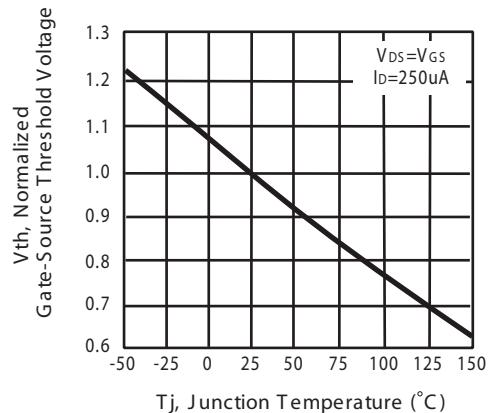


Figure 5. Gate Threshold Variation with Temperature

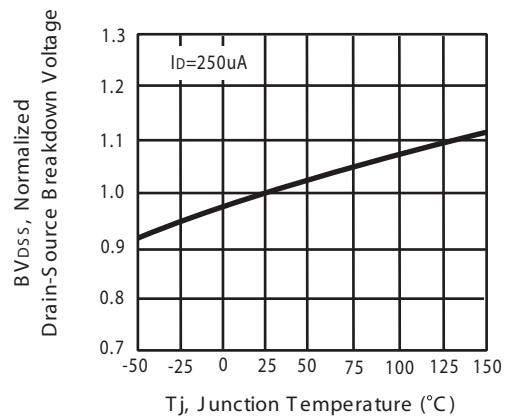


Figure 6. Breakdown Voltage Variation with Temperature

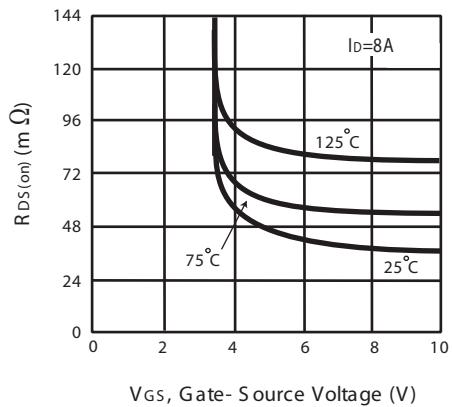


Figure 7. On-Resistance vs. Gate-Source Voltage

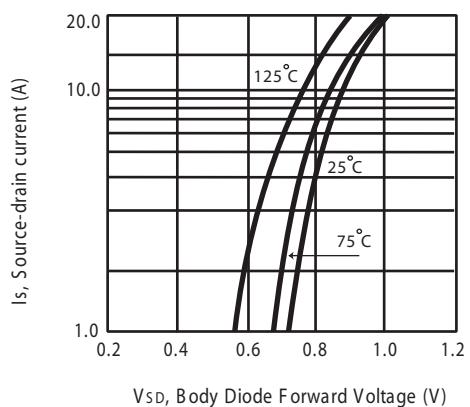


Figure 8. Body Diode Forward Voltage Variation with Source Current

# STU/D600S

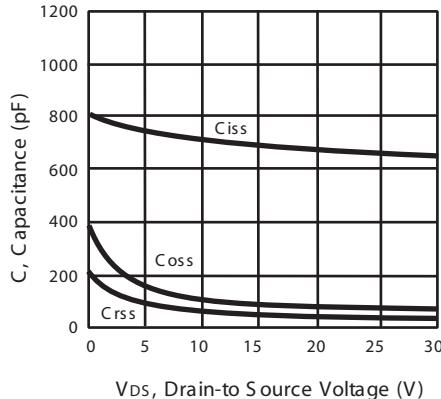


Figure 9. Capacitance

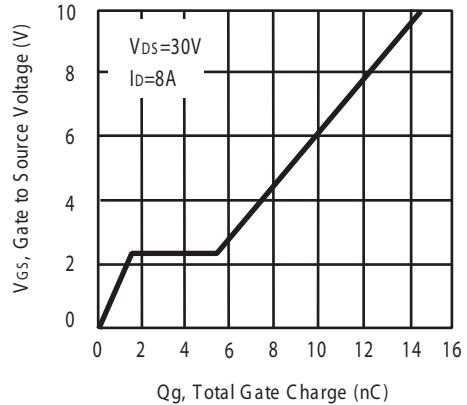


Figure 10. Gate Charge

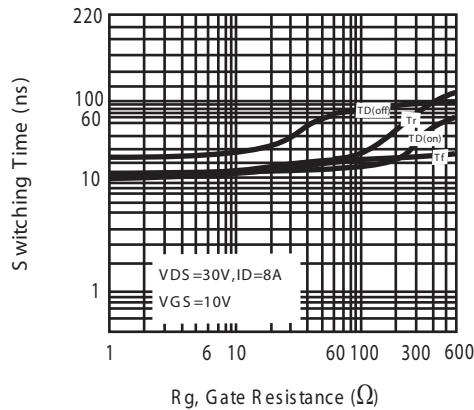


Figure 11. switching characteristics

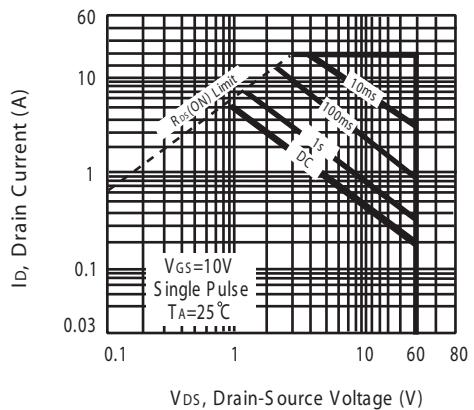


Figure 12. Maximum Safe Operating Area


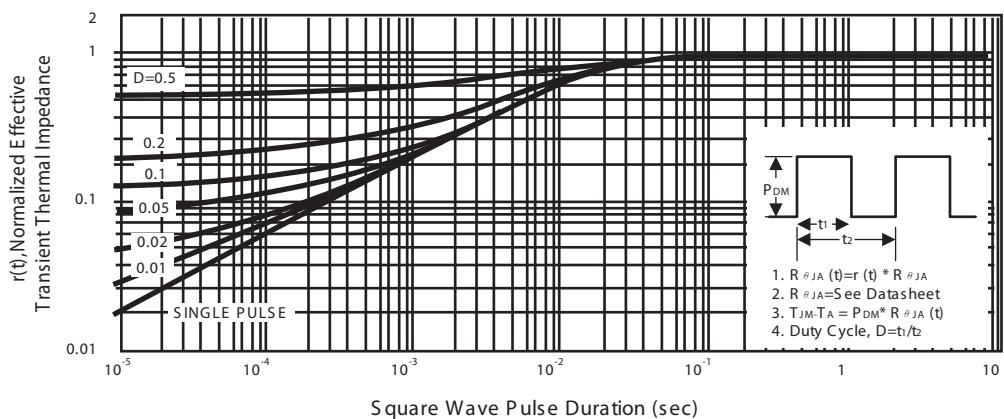


Figure 13. Normalized Thermal Transient Impedance Curve

# STU/D600S

## PACKAGE OUTLINE DIMENSIONS

TO-251

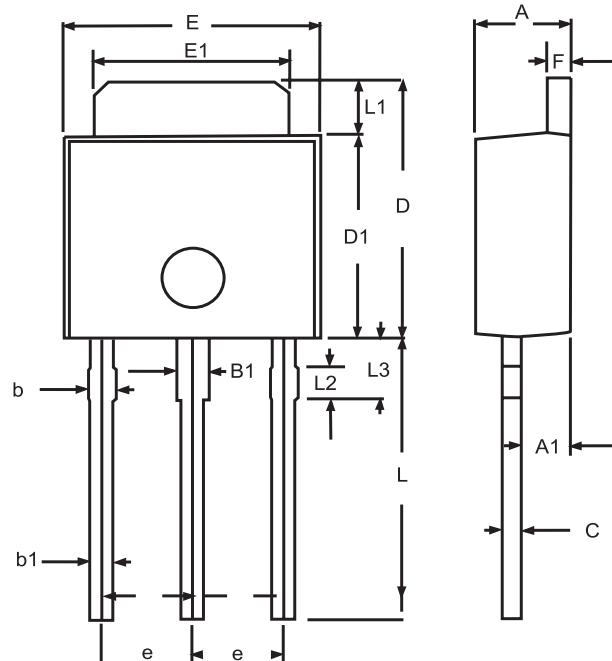


SYMBOLS	MILLIMETERS		INCHES	
	MIN	MAX	MIN	MAX
A	2.20	2.40	0.087	0.095
A1	1.100	1.300	0.043	0.051
B1	0.650	1.050	0.026	0.041
b	0.500	0.900	0.020	0.035
b1	0.400	0.800	0.016	0.32
C	0.400	0.600	0.016	0.024
D	6.700	7.300	0.264	0.287
D1	5.400	5.650	0.213	0.222
E	6.40	6.650	0.252	0.262
e	2.100	2.500	0.083	0.098
F	0.400	0.600	0.016	0.024
L	7.000	8.000	0.276	0.315
L1	1.300	1.700	0.051	0.067
L2	0.700	0.900	0.028	0.035
L3	1.400	1.800	0.055	0.071

# STU/D600S

## PACKAGE OUTLINE DIMENSIONS

TO-252

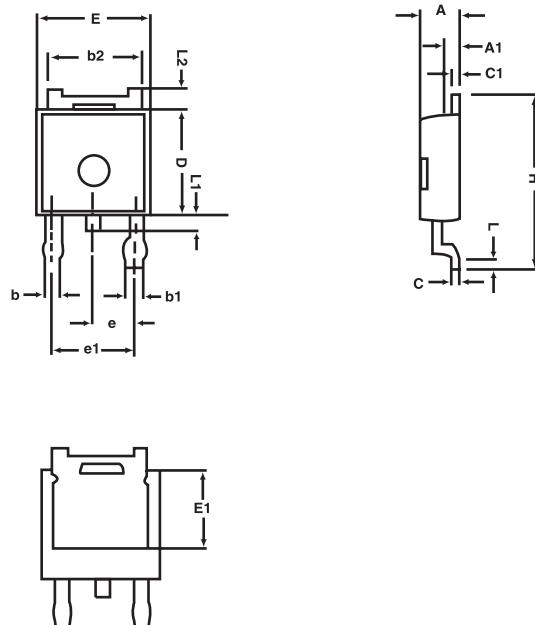


SYMBOLS	MILLIMETERS		INCHES	
	MIN	MAX	MIN	MAX
A	2.25	2.35	0.089	0.093
A1	0.95	1.05	0.037	0.041
b	0.77	0.85	0.030	0.033
b1	0.84	0.94	0.033	0.037
b2	5.30	5.45	0.209	0.215
C	0.49	0.53	0.019	0.021
D	6.00	6.20	0.236	0.244
E	6.40	6.60	0.252	0.260
E1	3.18	3.67	0.125	0.145
e	2.29	BSC	0.090	BSC
H	9.70	10.10	0.382	0.398
L	1.425	1.625	0.056	0.064
L1	0.650	0.850	0.026	0.033
L2	0.600	REF.	0.024	REF.


# STU/D600S

## TO251 Tube/TO-252 Tape and Reel Data

### TO-251 Tube

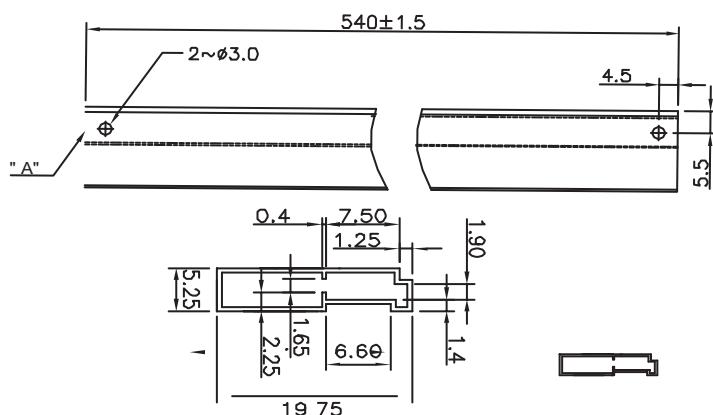


### TO-252 Carrier Tape

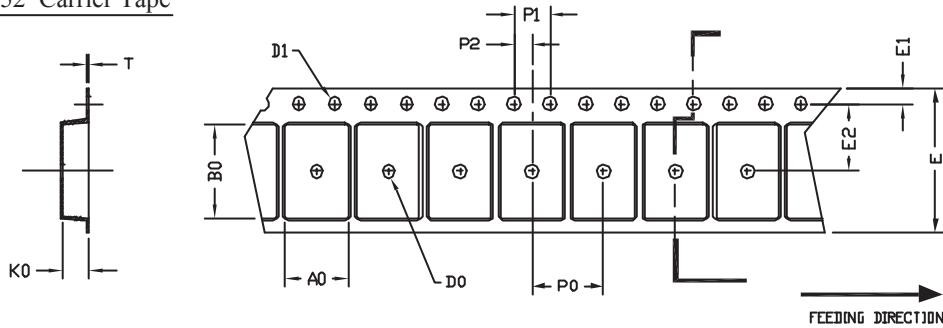

UNIT:mm

PACKAGE	A0	B0	K0	D0	D1	E	E1	E2	P0	P1	P2	T
TO-252 (16 mm)	$6.80 \pm 0.1$	$10.3 \pm 0.1$	$2.50 \pm 0.1$	$\phi 2$	$\phi 1.5$ $+ 0.1$ $- 0$	$16.0$ $0.3 \pm$	$1.75$ $0.1 \pm$	$7.5$ $\pm 0.15$	$8.0$ $\pm 0.1$	$4.0 \pm 0.1$	$2.0 \pm 0.15$	$0.3 \pm 0.05$

### TO-252 Reel

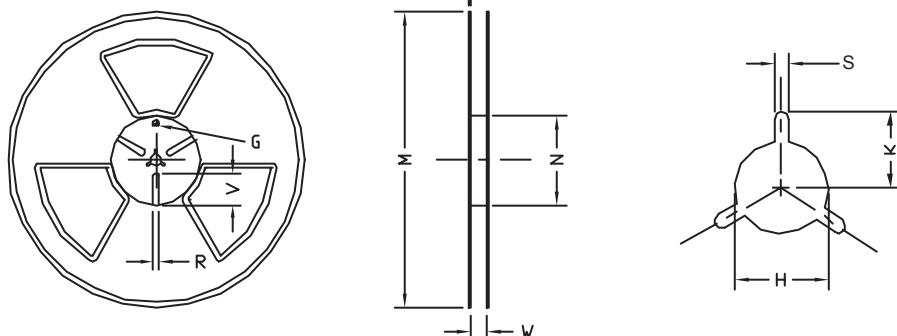

UNIT:mm

TAPE SIZE	REEL SIZE	M	N	W	T	H	K	S	G	R	V
16 mm	$\phi 330$	$\phi 330$ $\pm 0.5$	$\phi 97$ $\pm 1.0$	$17.0$ $+ 1.5$ $- 0$	2.2	$\phi 13.0$ $+ 0.5$ $- 0.2$	10.6	$2.0 \pm 0.5$	---	---	---