

Surface Mount, Molded Inductors



STANDARD ELECTRICAL SPECIFICATIONS

IND. (μH)	TOL.	Q MIN.	TEST FREQ. L & Q (MHz)	SELF-RESONANT FREQ. MIN. (MHz)	DCR MAX. (Ohms)	RATED* DC CURRENT (mA)
1.0	± 10 %	10	7.96	95.0	0.030	1800
1.2	± 10 %	10	7.96	70.0	0.035	1700
1.5	± 10 %	10	7.96	55.0	0.040	1600
1.8	± 10 %	10	7.96	47.0	0.050	1400
2.2	± 10 %	10	7.96	42.0	0.060	1300
2.7	± 10 %	10	7.96	37.0	0.070	1200
3.3	± 10 %	10	7.96	34.0	0.080	1120
3.9	± 10 %	10	7.96	32.0	0.090	1050
4.7	± 10 %	10	7.96	29.0	0.110	950
5.6	± 10 %	10	7.96	26.0	0.130	880
6.8	± 10 %	10	7.96	24.0	0.150	810
8.2	± 10 %	10	7.96	22.0	0.180	750
10	± 10 %	10	2.52	19.0	0.210	690
12	± 10 %	10	2.52	17.0	0.250	630
15	± 10 %	10	2.52	16.0	0.300	580
18	± 10 %	10	2.52	14.0	0.360	530
22	± 10 %	10	2.52	13.0	0.430	480
27	± 10 %	10	2.52	11.5	0.520	440
33	± 10 %	10	2.52	10.5	0.620	400
39	± 10 %	10	2.52	9.5	0.720	370
47	± 10 %	10	2.52	8.5	0.850	340
56	± 10 %	10	2.52	7.8	1.00	310
68	± 10 %	10	2.52	7.0	1.20	290
82	± 10 %	10	2.52	6.4	1.40	270
100	± 10 %	20	0.796	6.0	1.60	250
120	± 10 %	20	0.796	5.4	1.90	230
150	± 10 %	20	0.796	4.8	2.20	210
180	± 10 %	20	0.796	4.4	2.80	190
220	± 10 %	20	0.796	3.9	3.40	170
270	± 10 %	20	0.796	3.6	4.20	155
330	± 10 %	20	0.796	3.2	4.90	140
390	± 10 %	20	0.796	2.9	5.80	130
470	± 10 %	20	0.796	2.6	7.00	120
560	± 10 %	20	0.796	2.4	8.50	110
680	± 10 %	20	0.796	2.2	10.0	100
820	± 10 %	20	0.796	2.0	13.0	90
1000	± 10 %	20	0.252	1.8	15.0	85
1200	± 5 %	30	0.252	1.5	17.0	75
1500	± 5 %	30	0.252	1.4	20.0	70
1800	± 5 %	30	0.252	1.3	30.0	60
2200	± 5 %	30	0.252	1.2	35.0	55
2700	± 5 %	30	0.252	1.1	55.0	45
3300	± 5 %	30	0.252	1.0	60.0	40
3900	± 5 %	30	0.252	1.0	70.0	38
4700	± 5 %	30	0.252	0.9	78.0	36
5600	± 5 %	30	0.252	0.8	85.0	33
6800	± 5 %	30	0.252	0.7	110.0	30
8200	± 5 %	30	0.252	0.6	125.0	28
10000	± 5 %	20	0.0796	0.5	150.0	25

*Rated DC Current based on the maximum temperature rise, not to exceed 40 °C at + 85 °C ambient.

FEATURES

- Molded construction provides superior strength and moisture resistance
- Tape and reel packaging for automatic handling, 1000/reel, EIA-481
- Compatible with vapor phase infrared and wave soldering methods, (100 % tin plating)
- Lead (Pb)-free terminations and RoHS compliant



RoHS
COMPLIANT

ELECTRICAL SPECIFICATIONS

Inductance: 1.0 uH to 10 000 uH

Inductance Tolerance: ± 10 %, ± 5 %

Operating Temperature: - 25 °C to 85 °C

Storage Temperature: - 40 °C to + 100 °C


TEST EQUIPMENT

L & Q: H/P 4191

SRF: H/P 3577

DCR: H/P 34401

DIMENSIONS in inches [millimeters]

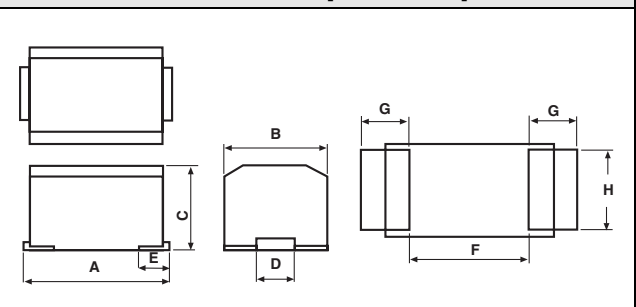

A	B	C	D
0.221 ± 0.012 [5.6 ± 0.3]	0.197 ± 0.012 [5.0 ± 0.3]	0.197 ± 0.012 [5.0 ± 0.3]	0.083 ± 0.001 [2.1 ± 0.2]
E	F	G	H
0.051 ± 0.001 [1.3 ± 0.2]	0.1182 [3.0]	0.1024 [2.6]	0.1773 [4.5]

EIA PART MARKING

- Inductance Value

DESCRIPTION

IMC-2220

MODEL

22 μH

INDUCTANCE
VALUE

± 10 %

INDUCTANCE
TOLERANCE

ER

PACKAGE
CODE

e3

JEDEC LEAD (Pb)-FREE
STANDARD

GLOBAL PART NUMBER

I M C
MODEL

2 2 2 0
SIZE

E R
PACKAGE
CODE

2 2 0
INDUCTANCE
VALUE

K
TOL



Disclaimer

All product specifications and data are subject to change without notice.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

Vishay disclaims any and all liability arising out of the use or application of any product described herein or of any information provided herein to the maximum extent permitted by law. The product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein, which apply to these products.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications unless otherwise expressly indicated. Customers using or selling Vishay products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Vishay for any damages arising or resulting from such use or sale. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.