


Description



Mechanical Dimensions

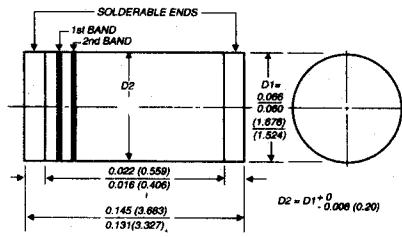






1st band denotes type and polarity
2nd band denotes voltage type

Dimensions in inches
and (millimeters)

Features

- HIGH TEMPERATURE METALLURGICALLY BONDED CONSTRUCTION
- SINTERED GLASS CAVITY-FREE JUNCTION
- 1.0 AMP OPERATION @ $T_A = 55^\circ\text{C}$, WITH NO THERMAL RUNAWAY
- MEETS UL SPECIFICATION 94V-0

Electrical Characteristics @ 25°C.		RGL41A . . . 41M Series							Units
Maximum Ratings		RGL41A RGL41B RGL41D RGL41G RGL41J RGL41K RGL41M							
Peak Repetitive Reverse Voltage... V_{RRM}		50	100	200	400	600	800	1000	Volts
RMS Reverse Voltage... $V_{R(rms)}$		35	70	140	280	420	560	700	Volts
DC Blocking Voltage... V_{DC}		50	100	200	400	600	800	1000	Volts
Average Forward Rectified Current... $I_{F(av)}$ Current 3/8" Lead Length @ $T_A = 75^\circ\text{C}$						1.0			Amps
Non-Repetitive Peak Forward Surge Current... I_{FSM} 1/2 Sine Wave Superimposed on Rated Load					30				Amps
Forward Voltage @ 1.0A... V_F		<	1.1>	<	1.2>		Volts
Full Load Reverse Current... $I_R(av)$ Full Cycle Average @ $T_A = 75^\circ\text{C}$					30				µAmps
DC Reverse Current... I_R @ Rated DC Blocking Voltage	$T_A = 25^\circ\text{C}$				5.0				µAmps
	$T_A = 125^\circ\text{C}$				50				µAmps
Typical Junction Capacitance... C_J (Note 1)				8.0					pF
Typical Thermal Resistance... R_{\thetaJC} (Note 2)				75					°C/W
Typical Reverse Recovery Time... t_{RR} (Note 3)		<	150>	250	<	500 >	Ns
Operating & Storage Temperature Range... T_J , T_{STRG}				-65 to 175					°C
Polarity Color Band (2nd Band)	Gray	Red	Orange	Yellow	Green	Blue	Violet		

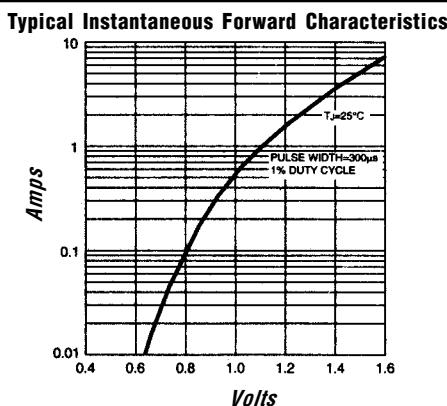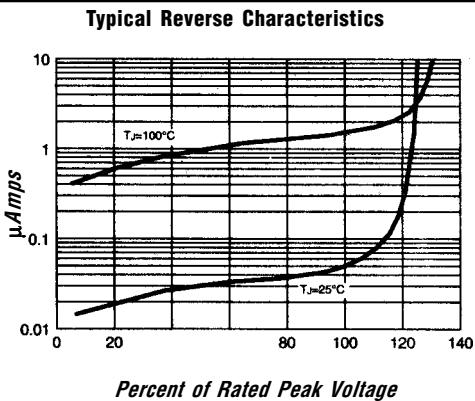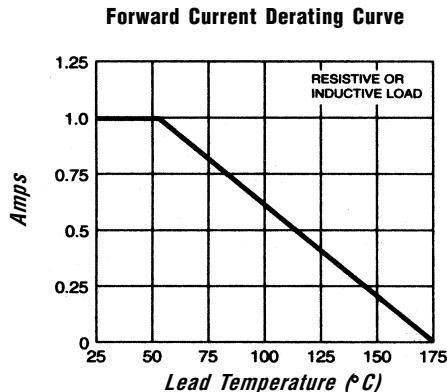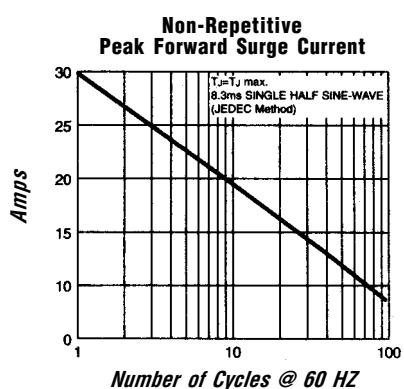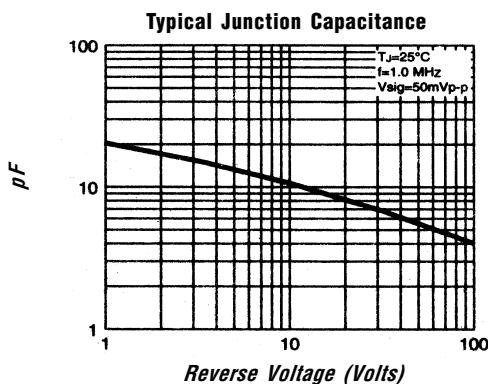

Ratings at
25 Deg. C ambient
temperature
unless otherwise
specified.

Single Phase Half
Wave, 60 Hz
Resistive or
Inductive Load.

For Capacitive
Load, Derate
Current by 20%.

- NOTES:**
1. Measured @ 1 MHZ and applied reverse voltage of 4.0V.
 2. Thermal Resistance from Junction to Ambient and from Junction to Lead, P.C.B. Mounted on 0.2" x 0.2" (5.0 x 5.0 mm) Copper Pad Areas.
 3. Reverse Recovery Condition I_F = 0.5A, I_R = 1.0A, I_{RR} = 0.25A.