



SCHTTKY BARRIER RECTIFIER

SRB1020 THRU SRB10100

VOLTAGE RANGE

20 to 100 Volts

CURRENT


10.0 Ampere

FEATURES

- Plastic package has Underwriters Laboratory Flammability Classification 94V-O utilizing Flame Retardant Epoxy Molding Compound
- Exceeds environmental standards of MIL-S-19500/228
- Low power loss, high efficiency
- Low forward voltage, high current capability
- High surge capacity
- For use in low voltage, high frequency inverters
- Free wheeling, and polarity protection applications

MECHANICAL DATA

- Case: TO-263(D²-PAK)plastic
- Terminals: Lead solderable per MIL-STD-202, Method 208
- Polarity: as marked
- Mounting position: Any
- Weight: 0.06ounce, 1.7 grams

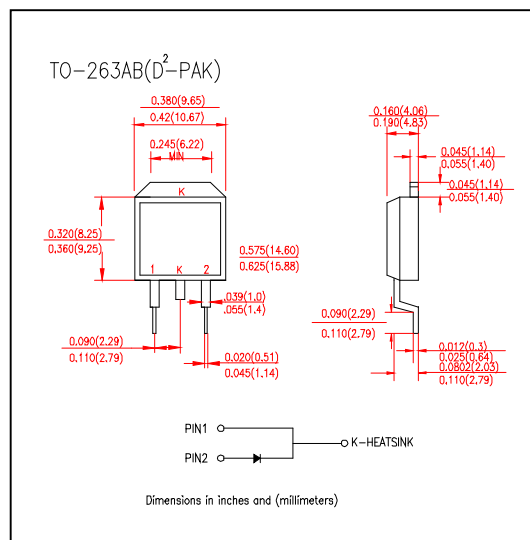

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

- Ratings at 25°C ambient temperature unless otherwise specified
- Single Phase, half wave, 60Hz, resistive or inductive load
- For capacitive load derate current by 20%

	SYMBOLS	SRB 1020	SRB 1030	SRB 1035	SRB 1040	SRB 1045	SRB 1050	SRB 1060	SRB 1080	SRB 10100	UNIT
Maximum Repetitive Peak Reverse Voltage	V_{RRM}	20	30	35	40	45	50	60	80	100	Volts
Maximum RMS Voltage	V_{RMS}	14	21	25	28	32	35	42	56	70	Volts
Maximum DC Blocking Voltage	V_{DC}	20	30	35	40	45	50	60	80	100	Volts
Maximum Average Forward Rectified Current At $T_c=100^\circ\text{C}$	$I_{(AV)}$	10.0									Amps
Peak Forward Surge Current 8.3ms single half sine wave superimposed on rated load (JEDEC method)	I_{FSM}	150									Amps
Maximum Forward Voltage per at 10.0A per element	V_F	0.65					0.75		0.85		Volts
Maximum DC Reverse Current at rated DC Blocking Voltage per element	$T_c = 25^\circ\text{C}$	0.5									mA
	$T_c = 100^\circ\text{C}$	50									
Typical Junction Capacitance(Note2)	C_J	500									pF
Typical Thermal Resistance (Note 1)	$R_{\theta JC}$	3.0									$^\circ\text{C}/\text{W}$
Operating and Storage Temperature Range	$T_J T_{STG}$	(-55 to +150)									$^\circ\text{C}$

Notes:

1. Thermal Resistance Junction to CASE
2. Measured at $V_R=4\text{v}$ and $f=1\text{MHz}$



SCHTTKY BARRIER RECTIFIER

SRB1020 THRU SRB10100

VOLTAGE RANGE 20 to 200 Volts
CURRENT 10.0 Ampere

RATING AND CHARACTERISTIC CURVES SRB1020 THRU SRB10100

FIG.1-TYPICAL FORWARD CURRENT DERATING CURVE

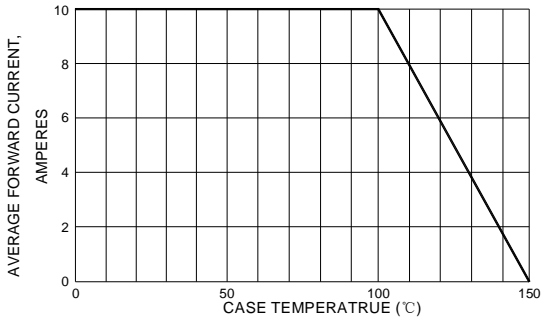


FIG.3-TYPICAL INSTANTANEOUS FORWARD CHARACTERISTIC

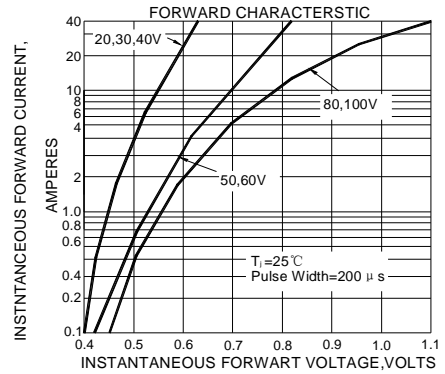


FIG.2-TYPICAL REVERSE CHARACTERISTICS

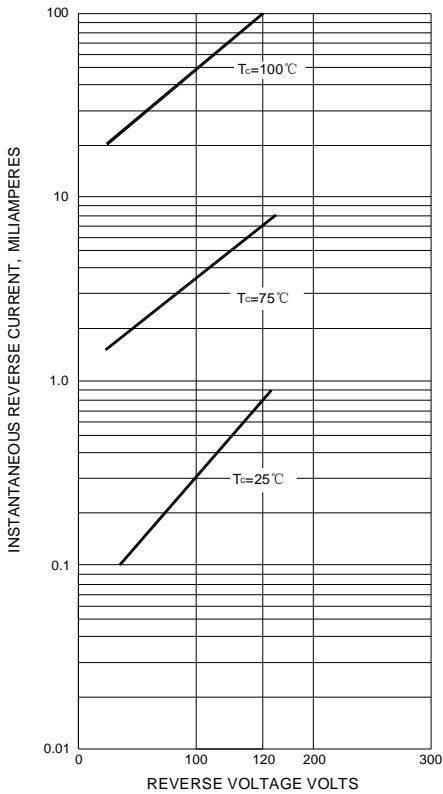


FIG.4-MAXIMUM NON-REPETITIVE SURGE CURRENT

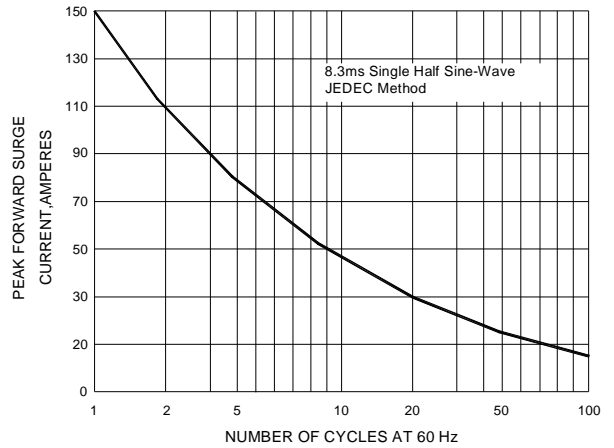


FIG.5-TYPICAL JUNCTION CAPACITANCE

