

C-13/15-FXX-PX-SXXX/XXX-XX



Features

- Single fiber bi-directional operation
- Laser diode with multi-quantum- well structure
- Low threshold current
- InGaAs/InP PIN Photodiode with trans-impedance amplifier
- High sensitivity with AGC*
- Differential ended output
- Single +5V Power Supply
- Integrated WDM coupler
- Un-cooled operation from -40°C to +85°C
- Hermetically sealed active component
- Single mode fiber pigtailed with optional FC/ST/SC/MU/LC connector
- LC/SC BOSA
- Design for fiber optic networks
- RoHS Compliant available

Absolute Maximum Rating (Tc=25°C)

Parameter	Symbol	Value	Unit
Fiber Output Power L/M/H	P_f	1(L)/1.5(M)/2.5(H)	mW
LD Reverse Voltage	V_{RLD}	2	V
PIN-TIA Voltage	V_{CC}	6	V
Operating Temperature	T_{opr}	-40 to +85	°C
Storage Temperature	T_{stg}	-40 to +85	°C

(All optical data refer to a coupled 9/125µm single-mode fiber)

Optical and Electrical Characteristics(Tc=25°C)

Parameter	Symbol	Min	Typical	Max	Unit	Test Condition
Laser Diode						
Optical Output Power	L	0.2	0.4	0.5	mW	CW, I _{th} + 20mA , kink free
	M	0.5	0.75	1		
	H	1	1.6	-		
Peak Wavelength	λ	1290	1310	1330	nm	CW, P _f =P _f (Min)
Spectrum Width (RMS)	$\Delta\lambda$	-	-	3	nm	CW, P _f =P _f (Min)
Threshold Current	I _{th}	-	10	15	mA	CW
Forward Voltage	V _F	-	1.2	1.5	V	CW, P _f =P _f (Min)
Rise/Fall Time	t _r / t _f	-	-	0.3	ns	I _{bias} =I _{th} ,10% to 90%
Monitor Diode						
Monitor Current	I _m	100	-	-	µA	CW, P _f =P _f (Min),V _{RPD} =2V
Dark Current	I _{DARK}	-	-	0.1	µA	V _{RPD} =5V
Capacitance	C _t	-	6	15	pF	V _{RPD} =5V, f=1MHz
Module						
Tracking Error	$\Delta P_f/P_f$	-1.5	-	1.5	dB	APC, -40 to +85°C
Optical Crosstalk	CRT		< -45		dB	

Note:

- 1.Pin assignment can be customized.
- 2.Specifications subject to change without notice.

Detector $\lambda=1480-1650\text{nm}$

DC Electrical Characteristics(Tc=25°C)

Parameter	Symbol	Min	Typical	Max	Unit	Test Condition	
Power Supply	Vcc	4.5	5	5.5	V		
Differential Output Voltage	Vd	F01	-	1000	-	mV	
		F03	-	260	450		
		F05	185	250	415		
Supply Current (no load)	Icc	F01	-	-	35	mA	
		F03	-	21	30		
		F05	-	26	50		

AC/Optical and Electrical Characteristics(Tc=25°C)


Parameter	Symbol	Min	Typical	Max	Unit	Test Condition	
Detection Range		1480	1550	1650	nm	-	
Gain @ 10 Mbps Differential	G	F01	0.17	-	220	V/mW	Measure differentially,AC coupled,RL=50Ω
		F03	6	7	-		Measure differentially,AC coupled,RL=50Ω
		F05	1.92	2.5	3.4		Measure differentially with 30uAp-p signal
Bandwidth	BW	F01	120	140	-	MHz	
		F03	404	470	-		
		F05	700	920	1100		
Saturation Power	Psat	F01	-3	0	-	dBm	BER<10 ⁻¹⁰ @155Mbps PRBS 2 ²³ -1,Er=10dB
		F03	-7	-6	-		BER<10 ⁻¹⁰ @622Mbps PRBS 2 ²³ -1,Er=10dB
		F05	-3	-	-		BER<10 ⁻¹² @1.25Gbps PRBS 2 ⁷ -1,Er=10dB
Sensitivity	Sens.	F01	-	-37	-35	dBm	BER<10 ⁻¹⁰ @155Mbps PRBS 2 ²³ -1,Er=10dB
		F03	-	-33	-30		BER<10 ⁻¹⁰ @622Mbps PRBS 2 ²³ -1,Er=10dB
		F05	-	-26	-23		BER<10 ⁻¹² @1.25Gbps PRBS 2 ⁷ -1,Er=10dB
Output Resistance	Rout	F01	-	50	65	ohm	
		F03	48	50	52		
		F05	48	50	62		

Pin Assignment

LD Pin Assignment


A Type

- Pin 1 : Laser Cathode
- Pin 2 : Laser Anode and Case Gnd
- Pin 3 : Monitor Diode Anode
- Pin 4 : Monitor Diode Cathode




D Type

- Pin 1 : Laser Anode and Monitor Diode Cathode
- Pin 2 : Case Gnd
- Pin 3 : Laser Cathode
- Pin 4 : Monitor Diode Anode




PIN-TIA Pin Assignment

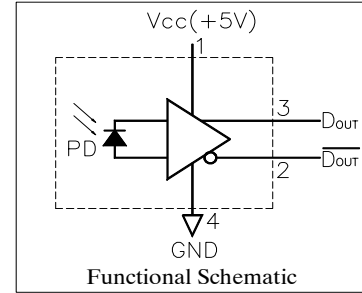

Outline Dimensions

Units in mm.

Part Number: C-13/15-FXX-PX-SXXX/XXX-XX

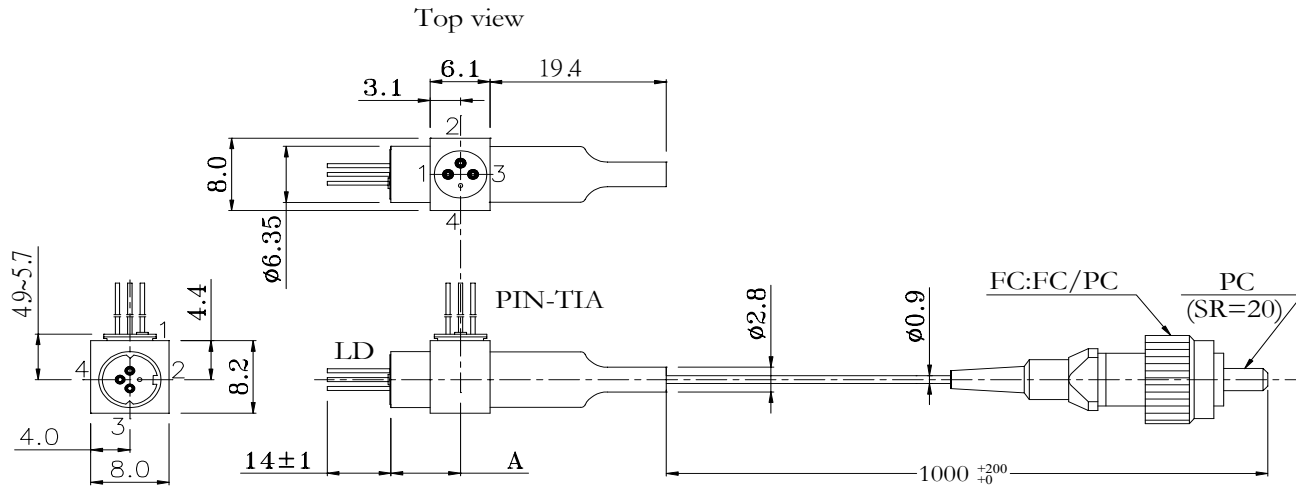


Left side view

Front view

DIMENSION: A:7.0~7.6 mm (Low & Middle power)
A:9.3~9.9 mm (High power)

Ordering Information

C-13/15-FXX-PX-SXXX/XXX-XX

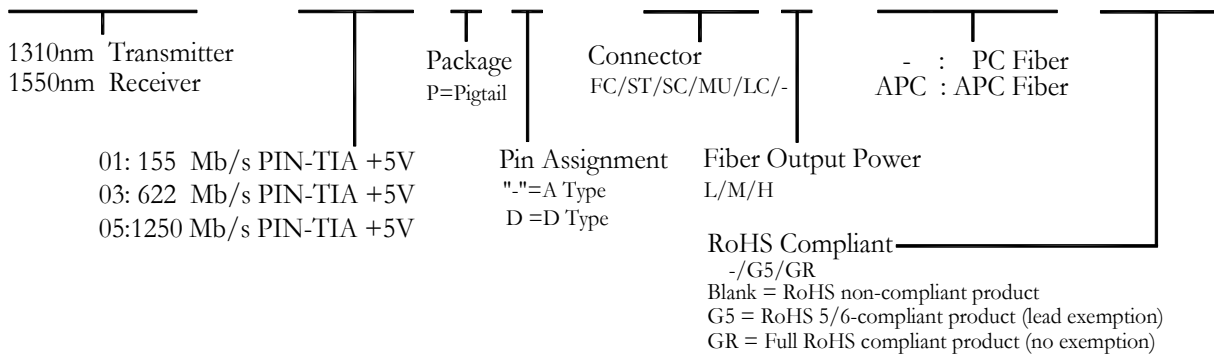

Warnings

Handling Precautions: This device is susceptible to damage as a result of electrostatic discharge (ESD). A static free environment is highly recommended. Follow guidelines according to proper ESD procedures.

Laser Safety: Radiation emitted by laser devices can be dangerous to human eyes. Avoid eye exposure to direct or indirect radiation.

Legal Notice

IMPORTANT NOTICE!

All information contained in this document is subject to change without notice, at LuminentOIC' s sole and absolute discretion. LuminentOIC warrants performance of its products to current specifications only in accordance with the company' s standard one-year warranty; however, specifications designated as "preliminary" are given to describe components only, and LuminentOIC expressly disclaims any and all warranties for said products, including express, implied, and statutory warranties, warranties of merchantability, fitness for a particular purpose, and non-infringement of proprietary rights. Please refer to the company' s Terms and Conditions of Sale for further warranty information.

LuminentOIC assumes no liability for applications assistance, customer product design, software performance, or infringement of patents, services, or intellectual property described herein. No license, either express or implied, is granted under any patent right, copyright, or intellectual property right, and LuminentOIC makes no representations or warranties that the product(s) described herein are free from patent, copyright, or intellectual property rights. Products described in this document are NOT intended for use in implantation or other life support applications where malfunction may result in injury or death to persons. LuminentOIC customers using or selling products for use in such applications do so at their own risk and agree to fully defend and indemnify LuminentOIC for any damages resulting from such use or sale.

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROVIDED ON AN "AS IS" BASIS. Customer agrees that LuminentOIC is not liable for any actual, consequential, exemplary, or other damages arising directly or indirectly from any use of the information contained in this document. Customer must contact LuminentOIC to obtain the latest version of this publication to verify, before placing any order, that the information contained herein is current.

© LuminentOIC, Inc. 2006
All rights reserved