


### 1. CONFIGURATION & DIMENSIONS :

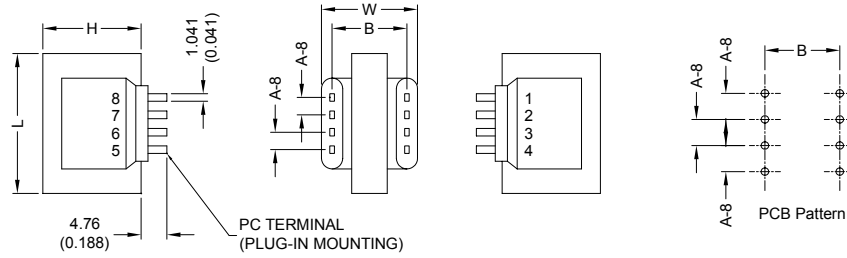


TYPE DPC 8 PINS

UNIT : mm (inch)

| SIZE<br>(VA) | L                | W                | H                | A-8<br>8 PIN    | B                | WT.<br>(gram) | OPTIONAL BRACKET * |     |     |
|--------------|------------------|------------------|------------------|-----------------|------------------|---------------|--------------------|-----|-----|
|              |                  |                  |                  |                 |                  |               | NO.                | MW  | MD  |
| 4.4          | 41.28<br>(1.625) | 31.75<br>(1.250) | 34.93<br>(1.375) | 6.35<br>(0.250) | 27.94<br>(1.100) | 197.86        | ---                | --- | --- |

### 2. SCHEMATIC :

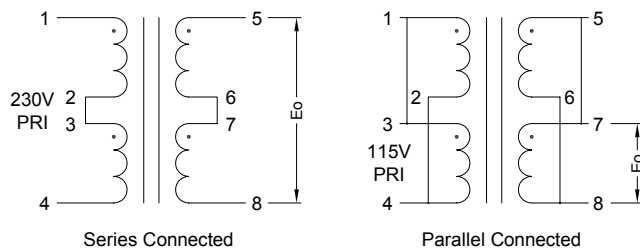

### 3. ELECTRICAL CHARACTERISTICS ( @ 25°C ) :

- |                                      |                                      |
|--------------------------------------|--------------------------------------|
| a. Primary Voltage                   | AC 115/230 V 50/60 Hz .              |
| b. No Load Primary Current           | Less Than 30mA .                     |
| c. Secondary Voltage (±5%)           | Series AC - V .<br>Parallel AC - V . |
| d. Secondary Load Current            | Series 120mA .<br>Parallel 240mA .   |
| e. Full Load Primary Current         | Less Than - mA .                     |
| f. Full Load Secondary Voltage (±5%) | Series 36.00V .<br>Parallel 18.00V . |
| g. DC Resistance                     |                                      |
| Pin 1-2                              | Primary-1 = 277 Ohm .                |
| Pin 3-4                              | Primary-2 = 332 Ohm .                |
| Pin 5-6                              | Secondary = - Ohm .                  |
| Pin 7-8                              | = - Ohm .                            |
| h. Insulation Resistance             | DC 500V 100Meg Ohm Of More .         |
| i. Withstand Voltage (Hi-Pot)        | AC 1500V 60Hz 1 Minutes .            |
| j. Temperature Rise                  | Less Than 60 Deg C .                 |
| k. Core Size                         | EI-41 x 13.50 m/m .                  |

#### l. Turns & Wire Gauge

|             |         |       |          |    |
|-------------|---------|-------|----------|----|
| Primary-1   | Pin 1-2 | Turns | Diameter | mm |
| Primary-2   | Pin 3-4 | Turns | Diameter | mm |
| Secondary-1 | Pin 5-6 | Turns | Diameter | mm |
| Secondary-2 | Pin 7-8 | Turns | Diameter | mm |



**RoHS Compliant**

NOTE : Specifications subject to change without notice. Please check our website for latest information.

17.03.2008



**SUPERWORLD ELECTRONICS (S) PTE LTD**