



1. CONFIGURATION & DIMENSIONS :

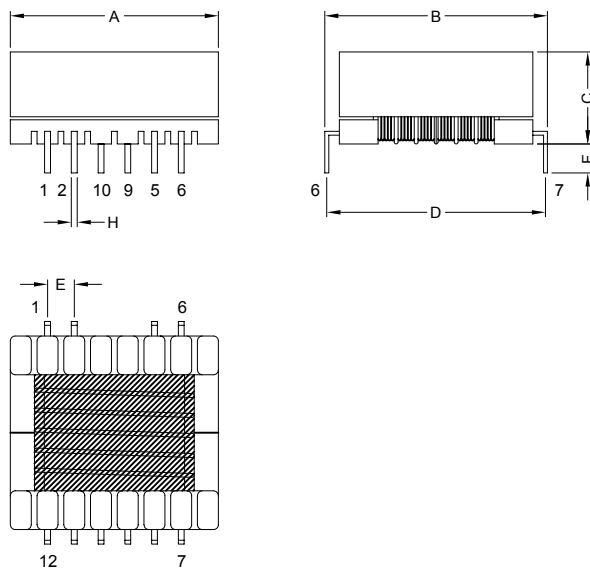

Unit:m/m

A	B	C	D	E	F	H
21.50 Max.	23.00 Max.	10.50 Max.	21.60±0.50	2.50±0.30	2.90±0.20	0.60±0.10

2. SCHEMATIC :

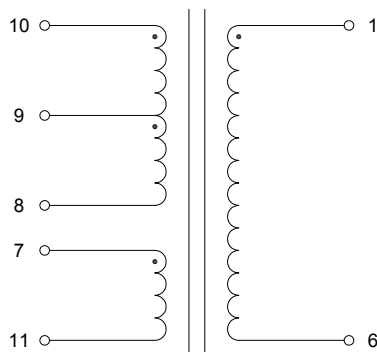

3. SCHEMATIC :

- a) Bobbin : Phenolic
- b) Core : EPC19
- c) Wire : Polyurethane (1UEW)
- d) Tape : Polyester Film
- e) Varnish : Synthite AC-43



RoHS Compliant

NOTE : Specifications subject to change without notice. Please check our website for latest information.

24.06.2008



SUPERWORLD ELECTRONICS (S) PTE LTD

4. GENERAL SPECIFICATION :

- a) Operating Temperature Range : -25°C to +105°C
- b) Insulation Class : B (130°C)

5. ELECTRICAL CHARACTERISTICS :

Part No.	Inductance (L)	Conditions	Test Frequency	DCR @ 25°C
EPCB9HTF-50746	L : (10-8) = 43uH±10%	-	10KHz 0.1V	(1-6) = 0.38KΩ Max.
				(10-8) = 120mΩ Max.
				(7-11) = 25mΩ Max.



RoHS Compliant

NOTE : Specifications subject to change without notice. Please check our website for latest information.

24.06.2008



SUPERWORLD ELECTRONICS (S) PTE LTD