

ER3A THRU ER3J

SUPER FAST RECOVERY RECTIFIER

VOLTAGE: 50-400V

CURRENT: 3.0A


FEATURES

- High reliability
- Low leakage
- Low forward voltage
- High current capability
- Super fast switching speed
- High surge capability
- Good for switching mode circuit

MECHANICAL DATA

- **Case:** Molded plastic
- **Epoxy:** UL94V-0 rate flame retardant
- **Lead:** MIL-STD- 202E, Method 208 guaranteed
- **Polarity:** Color band denotes cathode end
- **Mounting position:** Any
- **Weight:** 0.24 grams

SMC(DO-214AB)

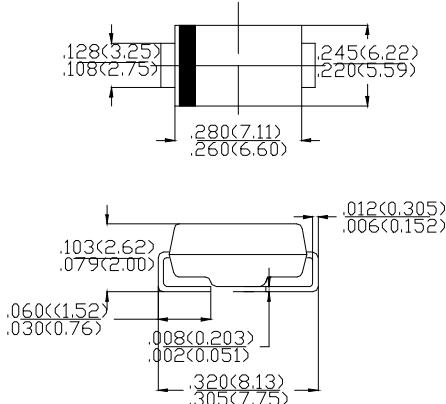

Dimensions in inches and (millimeters)

MAXIMUM RATINGS AND ELECTRONICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.

Single phase, half wave, 60Hz, resistive or inductive load.

For capacitive load, derate current by 20%.

	SYMBOL	ER3A	ER3B	ER3C	ER3D	ER3E	ER3J	units		
Maximum Recurrent Peak Reverse Voltage	V_{RRM}	50	100	150	200	300	400	V		
Maximum RMS Voltage	V_{RMS}	35	70	105	140	210	280	V		
Maximum DC Blocking Voltage	V_{DC}	50	100	150	200	300	400	V		
Maximum Average Forward rectified Current at $T_A=55^\circ C$	I_o	3.0						A		
Peak Forward Surge Current 8.3ms single half sine-wave superimposed on rated load (JEDEC method)	I_{FSM}	100						A		
Maximum Instantaneous forward Voltage at 3.0A DC	V_F	0.95		1.25		V				
Maximum DC Reverse Current at Rated DC Blocking Voltage $T_A=25^\circ C$	I_R	10.0						μA		
Maximum Full Load Reverse Current Full Cycle Average,.375"(9.5mm) lead length at $T_L=75^\circ C$		100								
Maximum Reverse Recovery Time (Note 1)	t_{rr}	35						nS		
Typical Junction Capacitance (Note 2)	C_J	15		10		pF				

Notes: 1.Test Conditions: $I_F=0.5A$, $I_R=1.0A$, $I_{RR}=0.25A$

2.Measured at 1MHz and applied reverse voltage of 4.0 volts