

Air-Cooled Argon-Ion Laser Heads in Cylindrical Package 2213 Series

**Key Features**

- Integral-mirror, metal-ceramic construction
- Hands-off operation
- Ultralow noise
- Fast warm-up
- Rugged construction
- Vibration isolation
- Ultrastable resonator and beam pointing

Applications

- DNA sequencing
- Flow cytometry
- Confocal microscopy
- Semiconductor inspection
- Hematology
- High-speed printing
- Photo processing

JDSU's air-cooled argon lasers are designed for complex, high-resolution OEM applications such as flow cytometry, DNA sequencing, graphic arts, and semiconductor inspection.

Symmetric design and axial airflow in the cylindrical argon ion laser heads provide the best mechanical package to ensure optimum beam-pointing stability and fast warm-up. Both initial installation and routine maintenance are straightforward due to tight production control of optical and mechanical tolerances. Blower-induced mechanical vibration is virtually eliminated through the use of flexible ducting between the laser head and blower assembly.


Compliance

- CE per specification EN55011 and EN50082-2
- UL 1950 and 1262
- CDRH 21 CFR 1040.10
- CUL
- EN60825-2
- EN60950, IEC 950 and EN61010

2

2213 Series Cylindrical Head

(Specifications in inches unless otherwise noted. E-vector is aligned with the umbilical cable.)

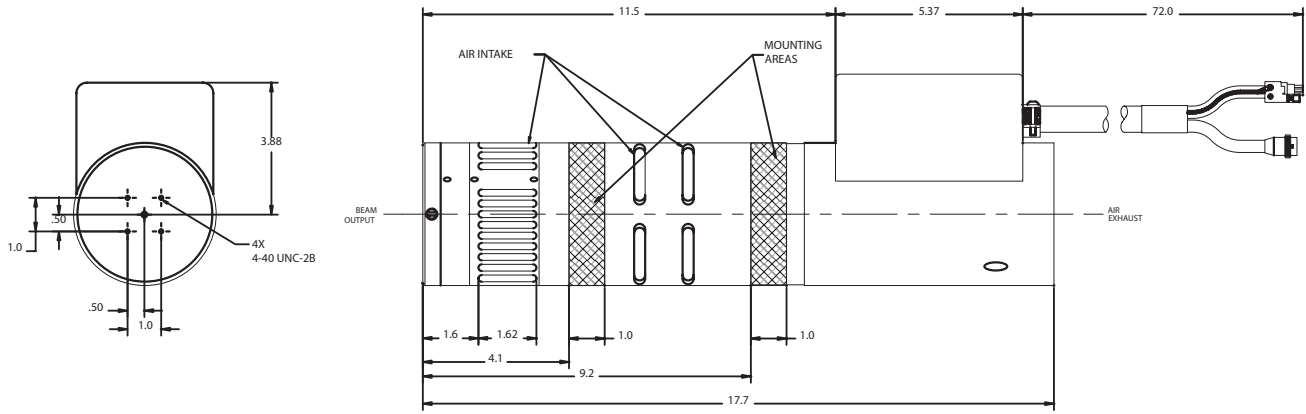

3

Specifications

Parameter	2213 -75SL	2213 -15VL	2213-25VL
Optical			
Output power (TEM ₀₀ , mW)	75	15	25
Wavelength (nm)	488	458	458
Mode purity (TEM ₀₀)	>95%	>95%	>95%
Beam diameter (1/e ² ±5%, mm)	0.65	0.65	0.65
Beam divergence (mrad±5%)	0.95	0.95	0.95
Minimum polarization ratio	>250:1	>250:1	>250:1
Longitudinal mode spacing (MHz)	444	444	444
Noise			
p-p, 20 Hz to 2 kHz	≤0.1%	≤0.1%	≤0.1%
p-p, 20 Hz to 20 kHz	≤1.0%	≤1.0%	≤1.0%
rms, 20 Hz 2 MHz	≤1.0%	≤1.0%	≤1.0%
Maximum drift (light control mode over 2 hours)	≤1.0%	≤1.0%	≤1.0%
Maximum warm-up time	15 minutes	15 minutes	15 minutes
Beam pointing stability after warm-up (2 hours, 25±3 °C)	<30 μRad	<30 μRad	<30 μRad
CDRH class	IIIb	IIIb	IIIb
Static alignment			
Beam position	±0.25 mm	±0.25 mm	±0.25 mm
Beam angle	±2.5 mrad	±2.5 mrad	±2.5 mrad
Environmental			
Temperature			
Operating	4 to 40 °C	4 to 40 °C	4 to 40 °C
Non-operating	-30 to 60 °C	-30 to 60 °C	-30 to 60 °C
Altitude			
Operating	0 to 10,000 feet	0 to 10,000 feet	0 to 10,000 feet
Non-operating	0 to 70,000 feet	0 to 70,000 feet	0 to 70,000 feet
Relative humidity (non-condensing)			
Operating	0 to 90%	0 to 90%	0 to 90%
Non-operating	0 to 100%	0 to 100%	0 to 100%
Shock			
Operating	25 g for 11 ms	25 g for 11 ms	25 g for 11 ms
Non-operating	25 g for 11 ms	25 g for 11 ms	25 g for 11 ms
Physical			
Weight	14 lbs.	14 lbs.	14 lbs.
Umbilical length	72±2 inches	72±2 inches	72±2 inches

Note: Nominal airflow is 115 CFM. Use model 1NB412 McLean Engineering or equivalent fan rated for 185 CFM free air and typical pressure head of 1.8 inches of water.

4

Ordering Information

For more information on this or other products and their availability, please contact your local JDSU account manager or JDSU directly at 1-800-498-JDSU (5378) in North America and +800-5378-JDSU worldwide or via e-mail at customer.service@jdsu.com.

Sample: 2213-75SL


Product Code	Description
2213-75SL	Argon laser head, cylindrical package, 75 mW output power, single line operation at 488 nm
2213-15VL	Argon laser head, cylindrical package, 15 mW output power, violet line operation at 458 nm
2213-25VL	Argon laser head, cylindrical package, 25 mW output power, violet line operation at 458 nm

Warranty

The 2213 laser tubes are warranted to be free from defects in materials and workmanship for 5,000 hours of operation at or below specified power, or for 12 months from the date of shipment, whichever occurs first. All other components of the laser and power supply are warranted to be free from defects and workmanship for 12 months from the date of shipment.

Regulatory Compliance

The products listed in this datasheet comply with one or more of the following regulatory standards, and may display one or more of the safety labels shown below. Contact your local JDSU sales representative for additional information on specific products or configurations.

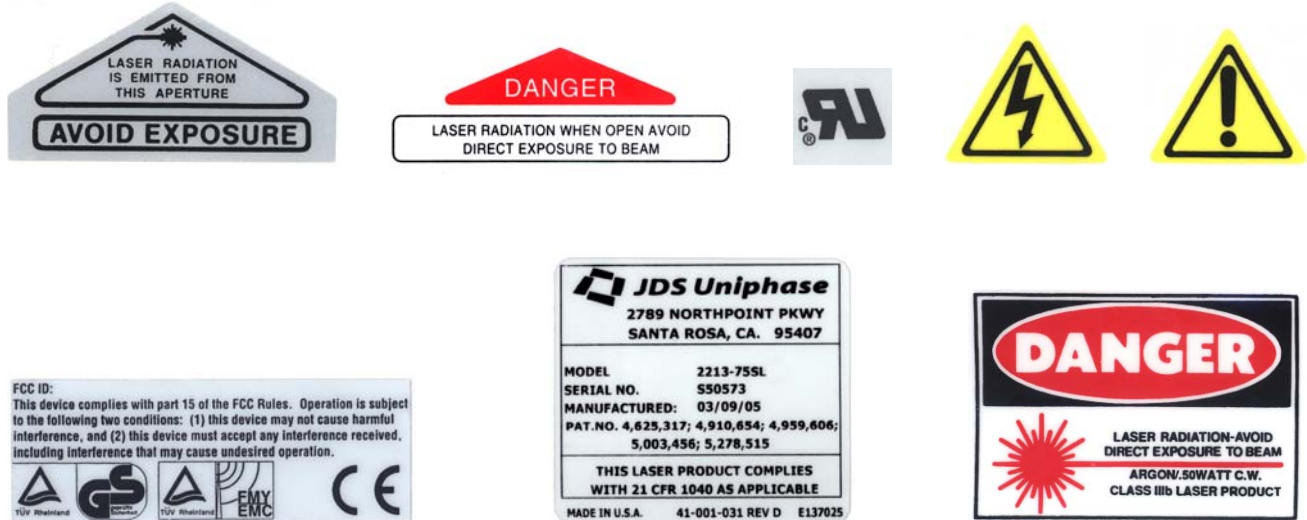

All statements, technical information and recommendations related to the products herein are based upon information believed to be reliable or accurate. However, the accuracy or completeness thereof is not guaranteed, and no responsibility is assumed for any inaccuracies. The user assumes all risks and liability whatsoever in connection with the use of a product or its application. JDSU reserves the right to change at any time without notice the design, specifications, function, fit or form of its products described herein, including withdrawal at any time of a product offered for sale herein. JDSU makes no representations that the products herein are free from any intellectual property claims of others. Please contact JDSU for more information. JDSU and the JDSU logo are trademarks of JDS Uniphase Corporation. Other trademarks are the property of their respective holders. ©2006 JDS Uniphase Corporation. All rights reserved. 10143158 Rev. 002 ALH2213.DS.CL.AE