

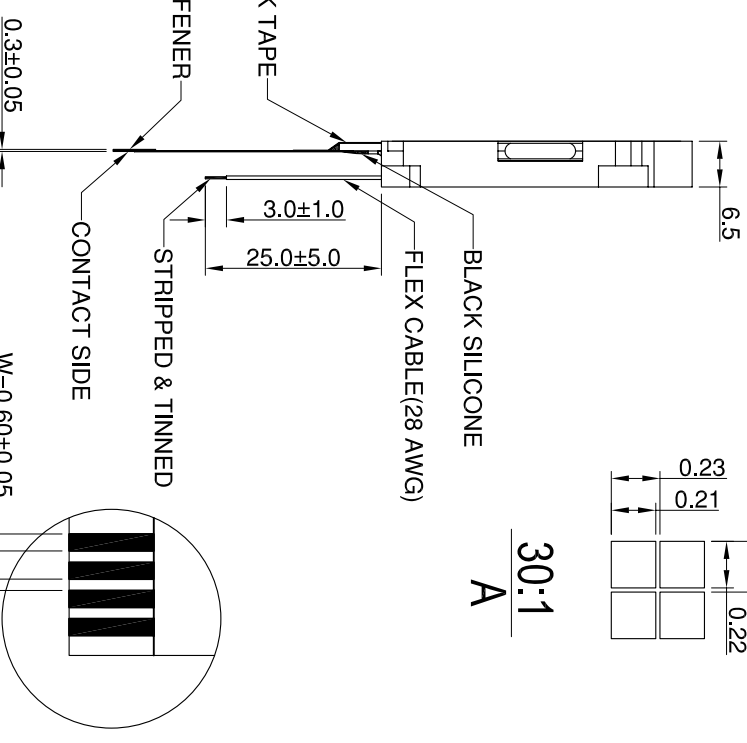



S/N	ECN NO.	NATURE OF MODIFICATION	CN/DATE
△		First issued	15/05/08
△			
△			

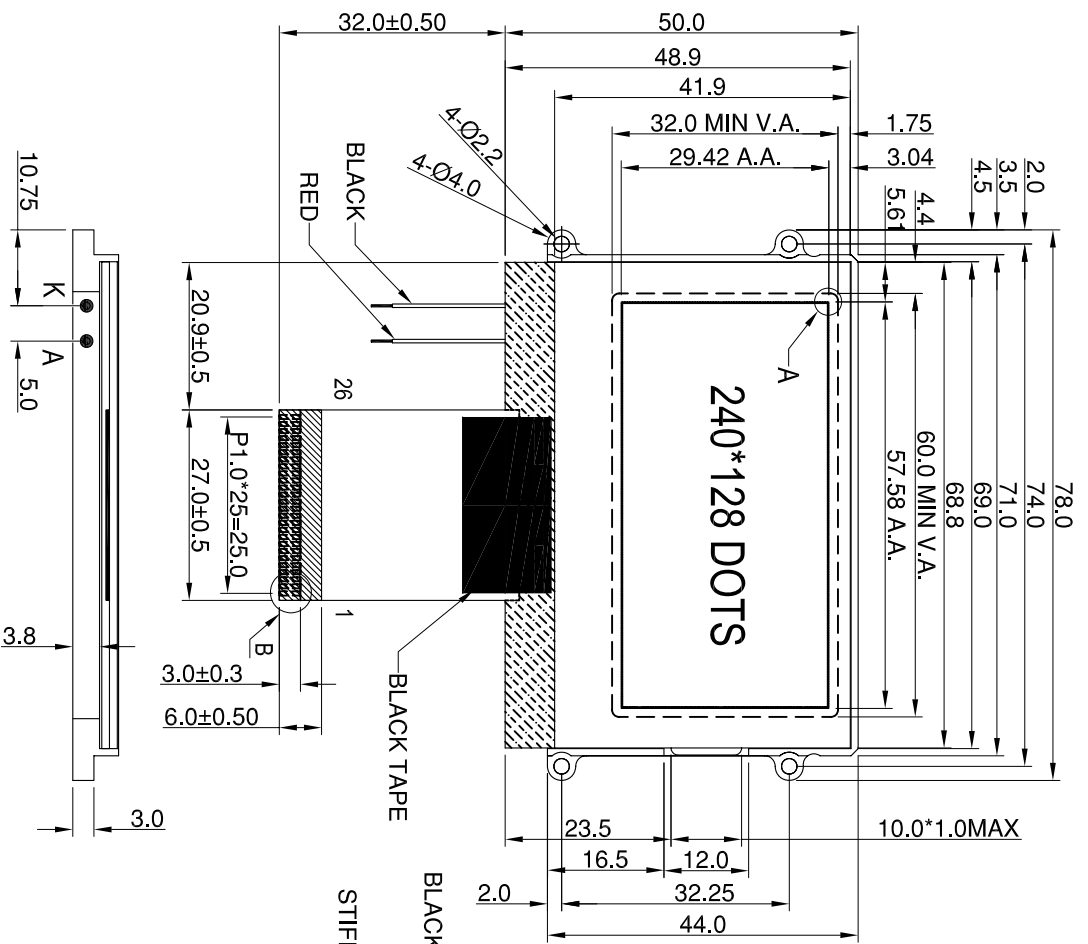

26	BM1
25	BMO
24	CS
23	NC
22	RST
21	CD
20	WR0
19	WR1
18	DO
17	D1
16	D2
15	D3
14	D4
13	D5
12	D6
11	D7
10	NC
9	VDD
8	VDD2,3
7	VSS
6	VBias
5	VLCD
4	VB0+
3	VB0-
2	VB1+
1	VB1-

ITEM	PARAMETERS	ITEM	PARAMETERS
OPERATING VOLTAGE	3.3V	OPERATING TEMP	-25°C TO 70°C
OPERATING CURRENT	NO MORE THAN 3mA	STORAGE TEMP	-30°C TO 85°C
LOD DRIVING VOLTAGE	16.5V	POLARIZER TYPE	FRONT: TRANSMISSIVE BACK: TRANSPARENT
LOD DRIVING MODE	FS/N POSITIVE/TRANSPARENT	BACKLIGHT	LED-SIDE WHITE VF=4.0V
LOD DRIVE METHOD	1/128DUTY 1/128BAS	ROHS STANDARD	OTHER
LOD DRIVE IC	UC1608GBE		
VIEW DIRECTION	8300 C/CLOCK		

UNIT	TOLERANCE
MM	X.X = ±0.2
3RD ANGLE	X.XX = ±0.10
ANG	ANG = -
SCALE:	1:1
DRAWN:	Bobby Zhang
CHECKED:	
APPROVED:	

DISPLAYTRONIC	
XIAMEN ZETTLER ELECTRONICS CO., LTD.	
TITLE:	LCM
MODEL NO:	AQM2412E-FLW-FBH
PART NO:	--
REV	A
SH NO	1/1