


VDL1774 Receiver Protector

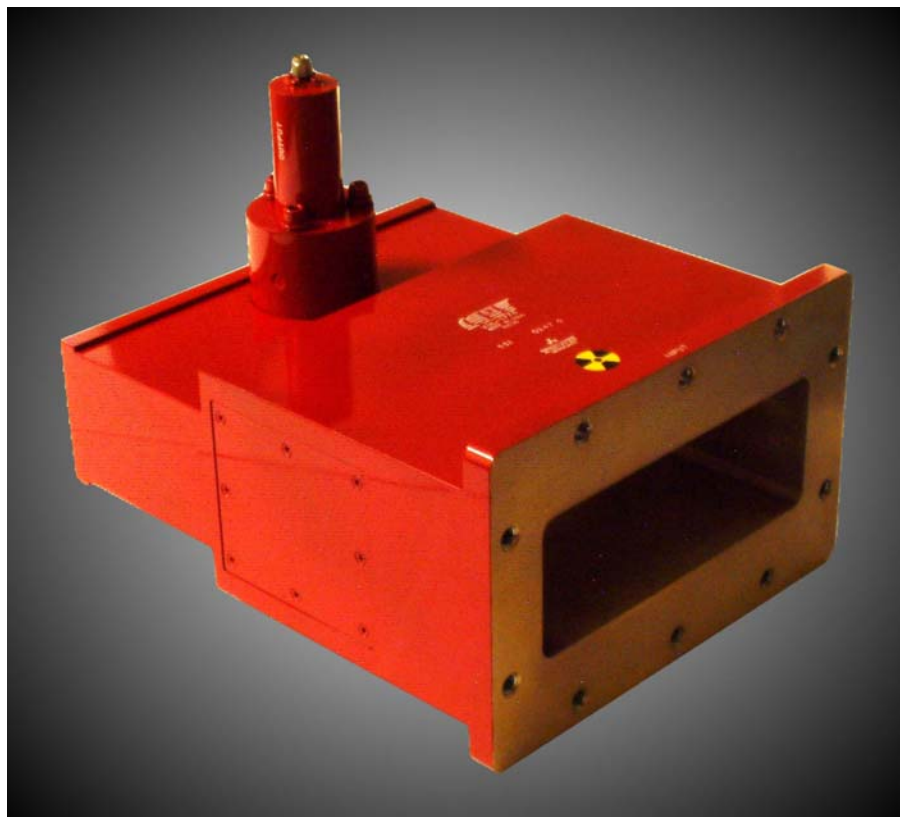

Features:

- Frequency: 1.2 - 1.4 GHz
- Peak Power:
 - Overload: 50 kW max (2 minutes)
 - Normal Operating: 7 kW max
- Duty Cycle: 0.10 max
- Pulsewidth: 150 μ Sec max
- Insertion Loss: 0.5 dB max
- VSWR: 1.4:1 max
- Flat Leakage: 40 mW max
- Spike Leakage: 100 mw max
- Recovery Time: 4 μ Sec max
- Input: WR650 waveguide
- Output: SMA male

Description:

L-Band Pre-TR Limiter designed for high power, high duty cycle applications.

150 Sohier Road
Beverly, Massachusetts 01915



Phone: 978-922-6000 Fax: 978-922-2736
E-Mail: marketing@bmd.cpii.com
Internet: www.cpii.com/bmd