

Features


- Small Size, Low Profile
- Superior Repeatability (Lot-to-Lot Variation)
- Typical Isolation 25 dB
- Typical Insertion Loss 0.8 dB
- Low Cost
- Lead-Free SOIC-16 Package
- 100% Matte Tin Plating over Copper
- Halogen-Free “Green” Mold Compound
- 260°C Reflow Compatible
- RoHS* Compliant Version of DS56-0005

Description

M/A-COM’s MAPDCC0019 is an IC-based monolithic power divider in a low cost SOIC-16 plastic package. The 6-way power divider is ideally suited for applications where PCB real estate is at a premium and part count reduction and cost are critical. Typical applications include base station switching networks and other cellular equipment, including subscriber units. Available in Tape and Reel.

The MAPDCC0019 is fabricated using a passive-integrated circuit process. The process features full-chip passivation for increased performance and reliability.

Functional Block Diagram¹

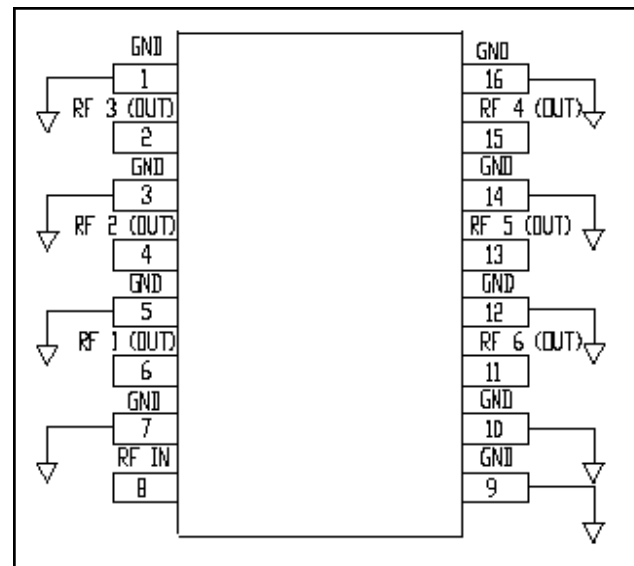

1. All unused pins must be RF and DC grounded.

Ordering Information

| Part Number | Package |
|---------------|-------------------|
| MAPDCC0019 | Bulk Packaging |
| MAPDCC0019-TR | 1000 piece reel |
| MAPDCC0019-TB | Sample Test Board |

Note: Reference Application Note M513 for reel size information.

Pin Configuration

| Pin No. | Function | Pin No. | Function |
|---------|------------|---------|------------|
| 1 | GND | 9 | GND |
| 2 | RF 3 (OUT) | 10 | GND |
| 3 | GND | 11 | RF 6 (OUT) |
| 4 | RF 2 (OUT) | 12 | GND |
| 5 | GND | 13 | RF 5 (OUT) |
| 6 | RF 1 (OUT) | 14 | GND |
| 7 | GND | 15 | RF 4 (OUT) |
| 8 | RF IN | 16 | GND |

* Restrictions on Hazardous Substances, European Union Directive 2002/95/EC.

Electrical Specifications: $T_A = 25^\circ\text{C}$, $Z_0 = 50\Omega$

| Parameter | Units | Min | Typ | Max |
|-----------------------------|-------|-----|-------|-------|
| Insertion Loss above 7.8 dB | dB | — | 0.8 | 1.2 |
| Isolation | dB | 20 | 25 | — |
| VSWR Input | — | — | 1.4:1 | 1.8:1 |
| Output | — | — | 1.3:1 | 1.5:1 |
| Amplitude Balance | dB | — | 0.5 | 0.9 |
| Phase Balance | Deg. | — | 4 | 8 |

Absolute Maximum Ratings ^{2,3}

| Parameter | Absolute Maximum |
|--------------------------|------------------|
| Input Power ⁴ | 1 W CW |
| Operating Temperature | -40°C to +85°C |
| Storage Temperature | -65°C to +150°C |

- Exceeding any one or combination of these limits may cause permanent damage to this device.
- M/A-COM does not recommend sustained operation near these survivability limits.
- With internal load dissipation of 0.125 W maximum.

Handling Procedures


Please observe the following precautions to avoid damage:

Static Sensitivity


GMIC Circuits are sensitive to electrostatic discharge (ESD) and can be damaged by static electricity. Proper ESD control techniques should be used when handling these devices.

Typical Performance Curves

Insertion Loss vs. Frequency

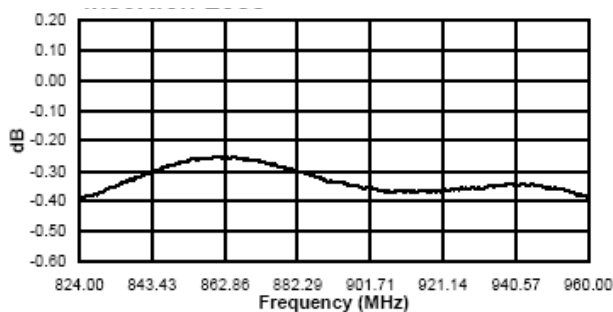


Amplitude Imbalance vs. Frequency

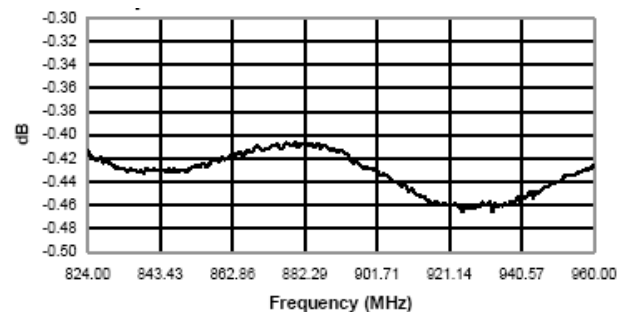


Typical Performance Curves


Isolation vs. Frequency

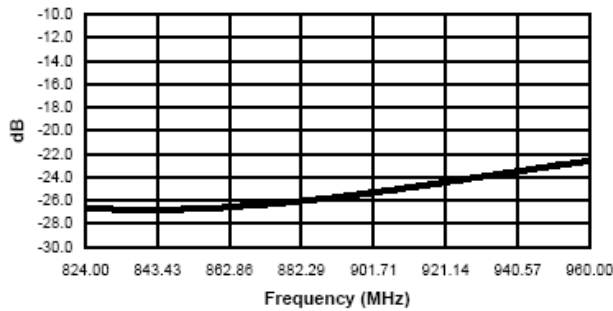


Phase Imbalance vs. Frequency

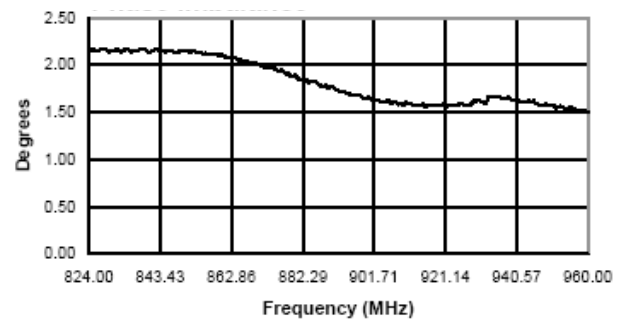


Input VSWR vs. Frequency

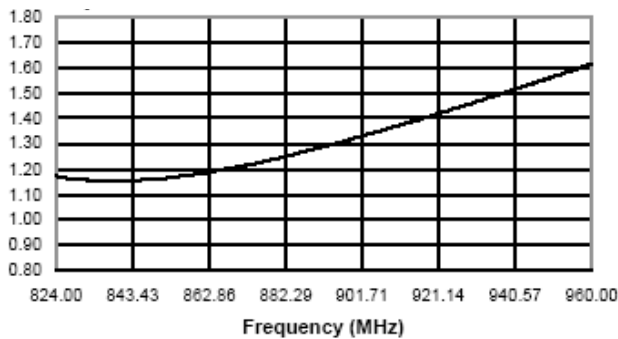

Output VSWR vs. Frequency

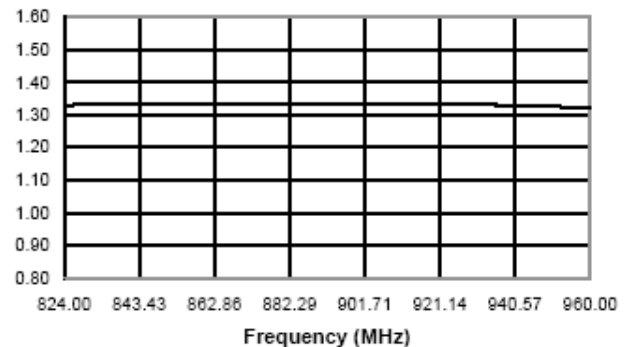

Lead-Free, SOIC-16[†]

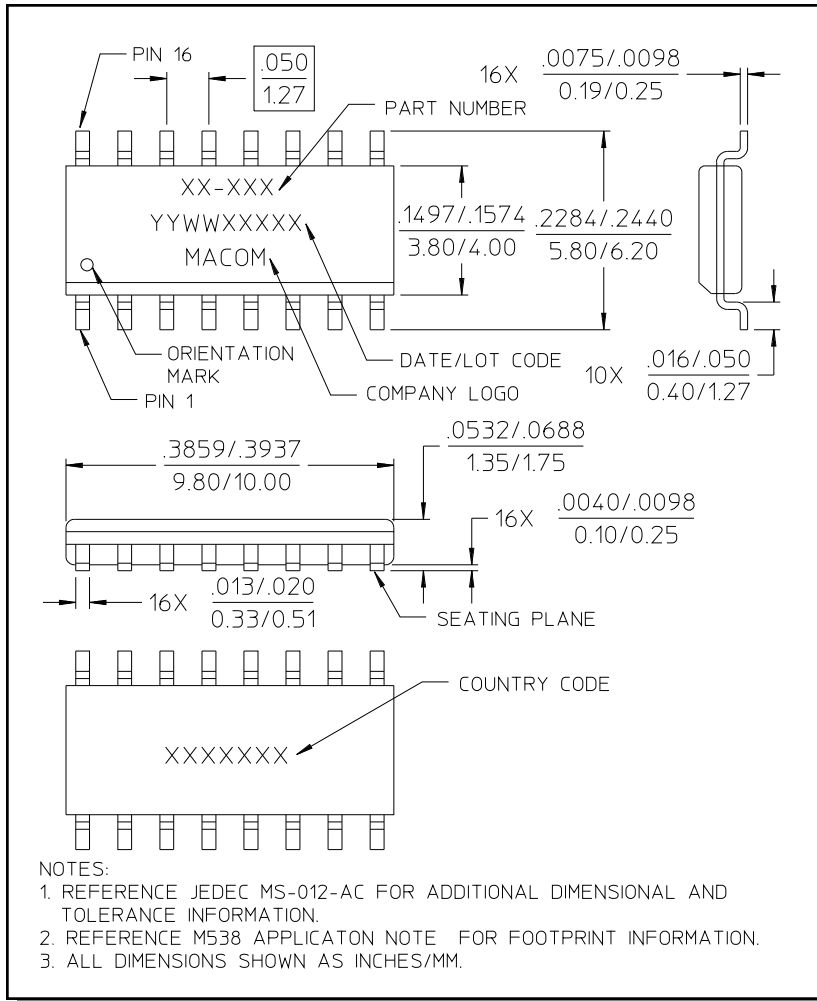

[†] Reference Application Note M538 for lead-free solder reflow recommendations.