



1. CONFIGURATION & DIMENSIONS :

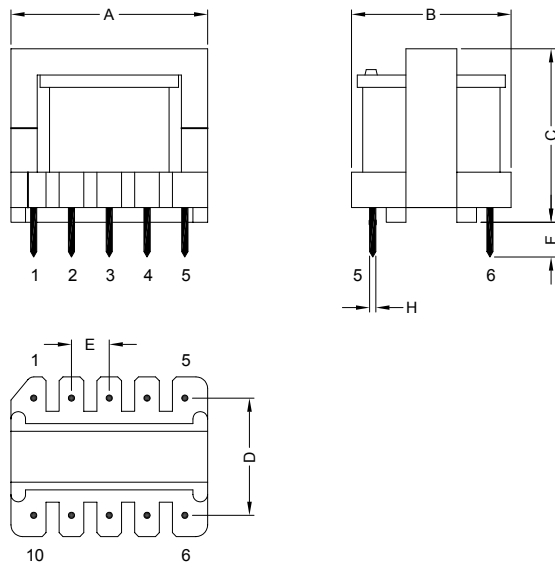

Unit:m/m

A	B	C	D	E	F	H
26.50 Max.	22.50 Max.	22.50 Max.	15.20±0.50	5.00±0.50	4.50±0.50	Ø0.80 Ref.

2. SCHEMATIC :

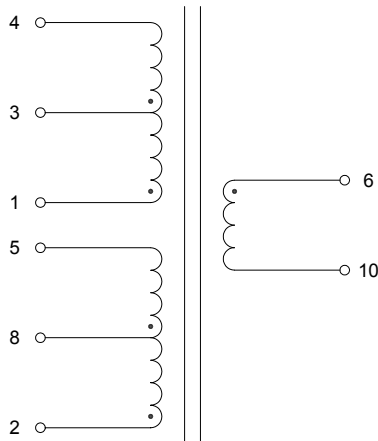

3. SCHEMATIC :

- a) Bobbin : Phenolic
- b) Core : EE25
- c) Wire : Polyurethane DD
- d) Tape : Polyester Film
- e) Varnish : Synthite AC-43



RoHS Compliant

NOTE : Specifications subject to change without notice. Please check our website for latest information.

18.06.2008



SUPERWORLD ELECTRONICS (S) PTE LTD

4. GENERAL SPECIFICATION :

- a) Operating Temperature Range : -25°C to +105°C
- b) Insulation Class : B (130°C)

5. ELECTRICAL CHARACTERISTICS :

Part No.	Inductance (L)	Conditions	Test Frequency	DCR @ 25°C
SEEC5VTF-50729	L : (1-4) = 9.6uH±15%	-	10KHz 50mV	(1-4) = 28.9mΩ Max.
	L : (5-2) = 0.3uH±15%	-	10KHz 50mV	(5-2) = 10.6mΩ Max.
	L : (6-10) = 138.6mH±15%	-	10KHz 50mV	(6-10) = 39.5Ω Max.



RoHS Compliant

NOTE : Specifications subject to change without notice. Please check our website for latest information.

18.06.2008



SUPERWORLD ELECTRONICS (S) PTE LTD