

# MODEL TL-4986



International size reference: ER22G75

## TECHNICAL DATA

(Typical values @+25°C for batteries stored for one year or less)




■ Nominal capacity @ 0.5 mA, to 2V	0.42 Ah
■ Rated voltage	3.6 V
■ Maximum recommended continuous current	5 mA
■ Maximum 1 sec. pulse capability	10 mA
■ Weight	5.7g (0.201 oz)
■ Volume	1.35 cc
■ Operating temperature range	-55°C to +85°C
■ U.L. Component Recognition MH 12193	

# TADIRAN LITHIUM BATTERIES

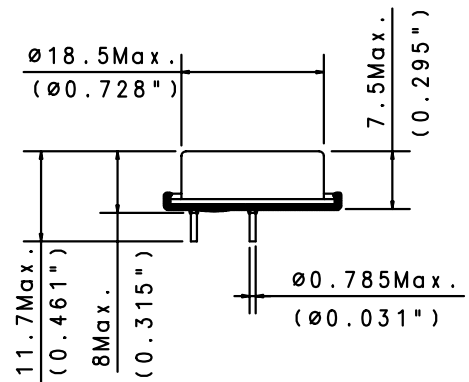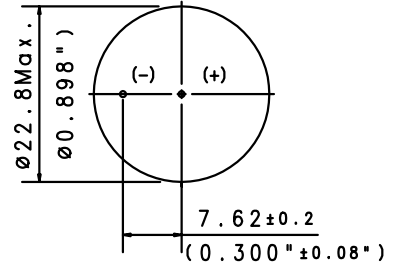

### ADDITIONAL INFORMATION

SUFFIX - /P                      TIN PLATED NICKEL PINS  
 CATALOGUE NO.:                      15-4986-43000

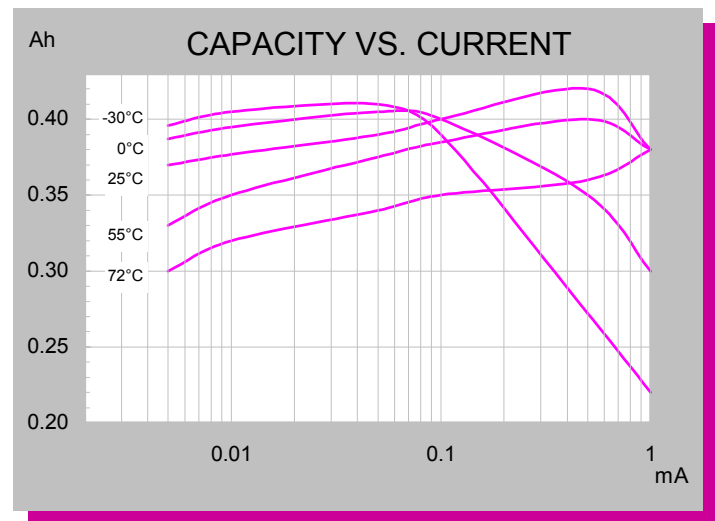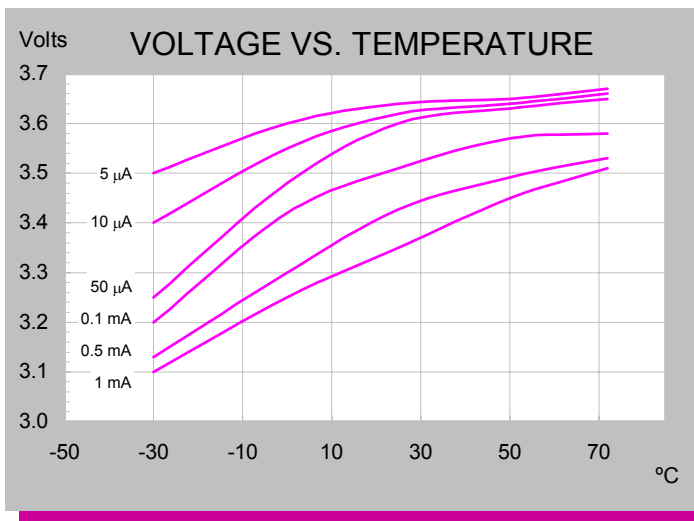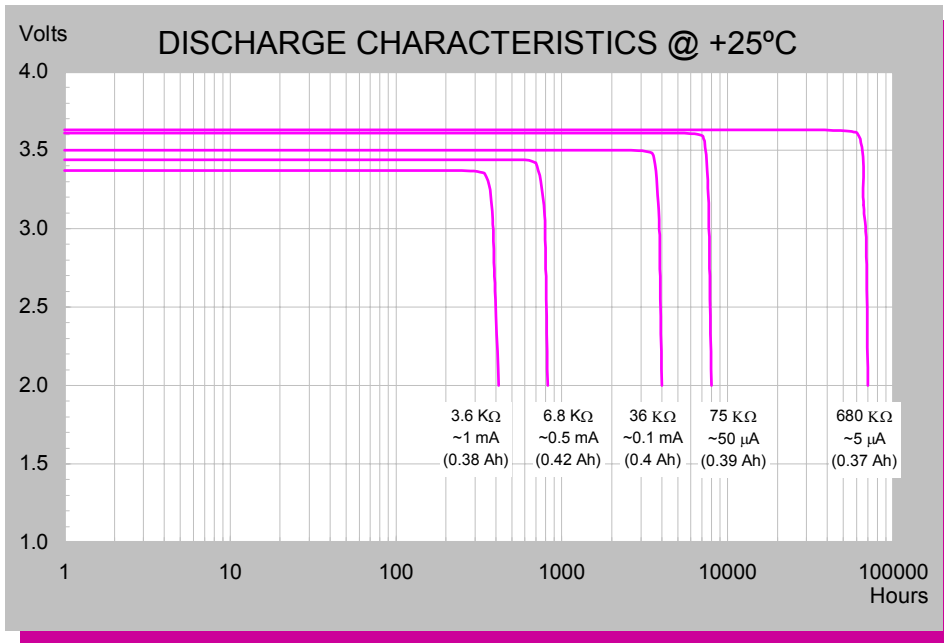

## XOL - Extended Operating Life

Note: Any presentations in this data sheet concerning performance are for information purpose only and are not construed as warranties either expressed or implied, of future performance. Rev. D 05/03