
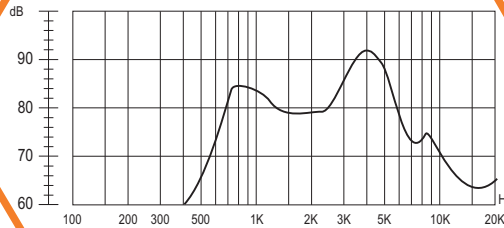
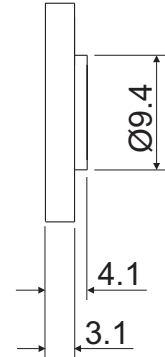


# SoniCrest

## SPEAKER SOUND GENERATORS

### HSB20L



#### Dimension

Unit : mm  
Tolerance : ±0.3mm

#### Frequency Response

Normalized to 0.1W Input Power and  
0.1m Measuring Distance

- **Specification** (all data taken at 25°C unless otherwise specified)

Coil Impedance (Ω)	Rated Power (W)	Maximum Input Power (W)	Resonance Frequency (Hz)	★Frequency Range (Hz)	★sound Output at 1kHz (dB)	Operating Temperature (°C)	Storage Temperature (°C)
4 ± 15%	0.1	0.2	1000 ± 25%	1000 ~ 4100	84 ± 3	-20 ~ +60	-20 ~ +60

#### HSB20L-4

The specification are only for 4Ω version. Specification for other impedance is available upon request.  
★value normalized to 0.1W input power and 0.1m measuring distance.