


## SUB-MINIATURE SILICON HIGH VOLTAGE RECTIFIER

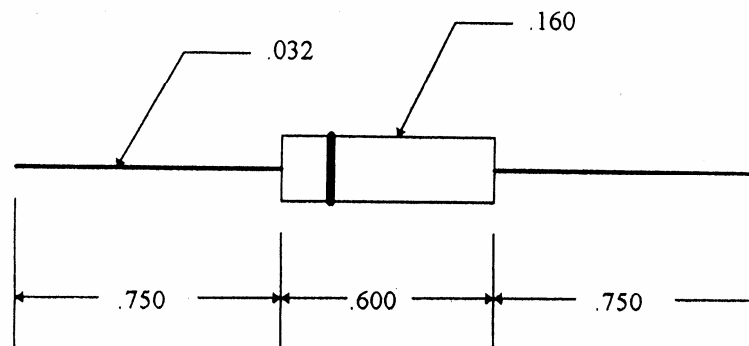

PART NUMBER	PIV VOLTS	$I_o$ ma @ 40° C	$V_f$ @ $I_o$ @ 25° C	$I_r$ @ PIV @ 25° C	MAX SINGLE CYCLE SURGE CURRENT
B780-50	5000	600	7	1 uA	25 AMPS
B780-60	6000	400	10	1 uA	25 AMPS
B780-70	7000	300	10	1 uA	25 AMPS
B780-80	8000	250	12	1 uA	25 AMPS
B780-100	10000	200	15	1 uA	25 AMPS
B780-120	12000	200	15	1 uA	25 AMPS
B780-150	15000	150	25	1 uA	25 AMPS
B780-200	20000	150	30	1 uA	25 AMPS

SUFFIX "A" REPRESENTS AVALANCHE CHARACTERISTICS

EX: B780-150A

(203) 467-2591 TEL

(203) 469-5928 FAX

Email: Info@ edal.com

Internet: <http://www.edal.com>

***EDAL*** industries, inc.

51 Commerce St. East Haven, CT 06512