


Type SLPX 85 °C Aluminum Electrolytic Snap-In Capacitors

Long Life (3000 h) Wide Range Snap-In

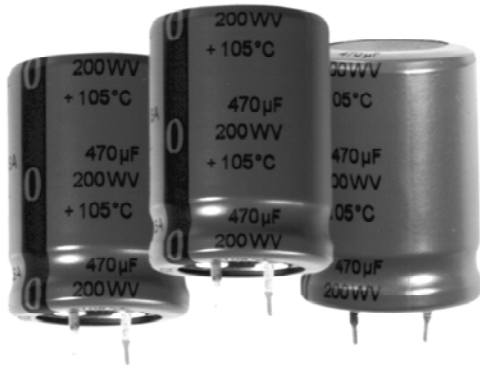

Type SLPX can operate at 85 °C at rated voltage for 3000 hours. This aluminum electrolytic snap-in capacitor offers a wide range of voltages and capacitance values to fit most DC filtering and switching power supply applications. The SLPX is the best value package compared to the other snap-in series.

Highlights

- 3000 h ripple load life at rated voltage
- 85 °C rated
- Small case size with high capacitance
- Best for switching power supplies
- 22 mm to 35 mm diameter, 10 mm lead spacing
- Great value snap-in type
- High ripple current

Specifications

Operating Temperature Range: –40 °C to 85 °C (10 Vdc~250 Vdc)

Voltage Range: 10 Vdc to 250 Vdc

Capacitance Range: 220 µF to 82,000 µF

Capacitance Tolerance: ±20%

Leakage Current: $\leq 3 \sqrt{CV}$ (µA)

Ripple Current Multipliers:

Ambient Temperature / Multiplier			
20 °C - 45 °C	55 °C	65 °C - 75 °C	85 °C
1.58	1.41	1.22	1.00

Voltage	Frequency / Multiplier			
	60 Hz	120 Hz	1 kHz	10 kHz & Up
10 - 100 Vdc	0.90	1.00	1.15	1.25
160 - 250 Vdc	0.80	1.00	1.15	1.47

To apply multipliers, see ratings tables for ripple current values

Ripple Life: 3,000 h @ full load @ 85 °C
 Δ Capacitance $\pm 20\%$ of initial value
 ESR $\leq 200\%$ of limit
 Leakage current \leq initial specified value

Load Life Test: 3,000 h at rated voltage at 85 °C
 Δ Capacitance $\pm 20\%$ of initial value
 DF $\leq 200\%$ of specified value
 Leakage current \leq initial specified value
 There shall be no leakage of electrolyte



Complies with the EU Directive 2002/95/EC requirement restricting the use of Lead (Pb), Mercury (Hg), Cadmium (Cd), Hexavalent chromium (Cr(VI)), PolyBrominated Biphenyls (PBB) and PolyBrominated Diphenyl Ethers (PBDE).


Type SLPX 85 °C Aluminum Electrolytic Snap-In Capacitors

Specifications


Shelf Life: Capacitor stored @ no voltage for 1 kh @ 85 °C
 Δ Capacitance $\pm 15\%$ of initial value
 DF $\leq 150\%$ of specified value
 Leakage current \leq initial specified value
 There shall be no leakage of electrolyte

Vibration: 2 h applied in 3 mutually perpendicular directions:
 Vibration frequency range: 10 Hz to 55 Hz for one minute. Peak to peak amplitude: 1.5 mm

Outline Drawings

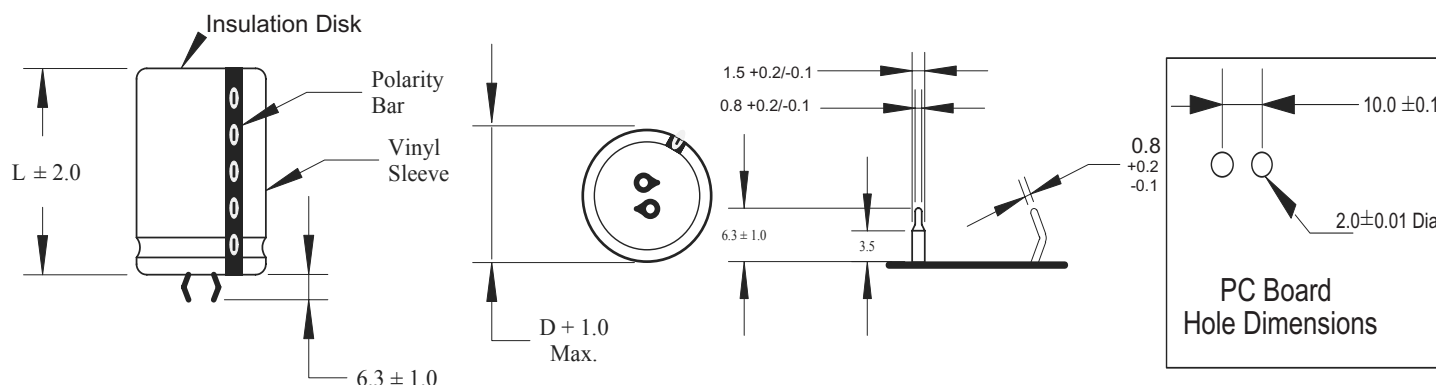

Part Numbering System

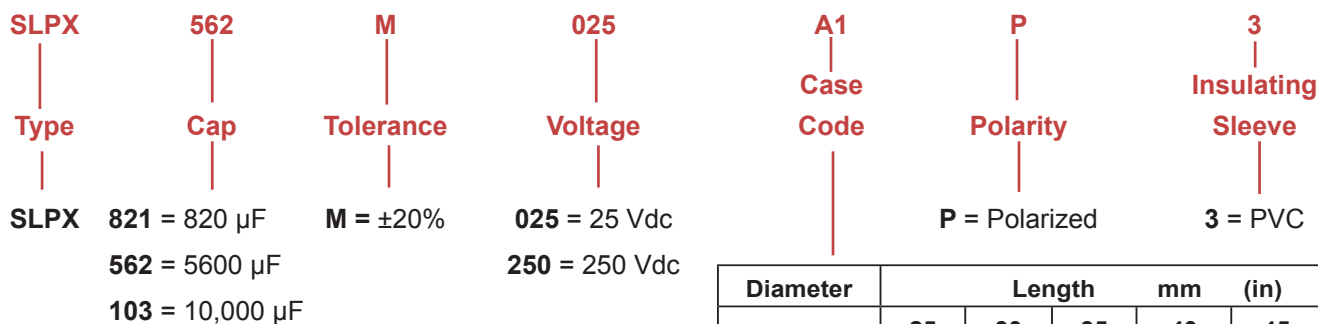

Diameter		Length					
		mm	(in)	mm	(in)	mm	(in)
		25	30	35	40	45	50
		(1.00)	(1.18)	(1.38)	(1.57)	(1.77)	(2.00)
22	(0.87)	A1	A3	A5	A7	A4	A9
25	(1.00)	C1	C3	C5	C7	C4	C9
30	(1.18)	E1	E3	E5	E7	E4	E9
35	(1.38)	H1	H3	H5	H7	H4	H9

Type SLPX 85 °C Aluminum Electrolytic Snap-In Capacitors

Ratings

Cap μF	Catalog Part Number 3000 h @ 85 °C	Max ESR 120 Hz/25°C (Ω)	Max Ripple 120 Hz/85°C (A _{rms})	Nominal Size (DxL) (mm)
10 Vdc (13 Vdc Surge)				
12000	SLPX123M010A1P3	0.061	2.41	22 x 25
15000	SLPX153M010A3P3	0.049	2.88	22 x 30
15000	SLPX153M010C1P3	0.049	2.88	25 x 25
18000	SLPX183M010A5P3	0.041	3.22	22 x 35
18000	SLPX183M010C3P3	0.041	3.08	25 x 30
22000	SLPX223M010A7P3	0.033	3.79	22 x 40
22000	SLPX223M010C3P3	0.033	3.66	25 x 30
22000	SLPX223M010E1P3	0.033	3.53	30 x 25
27000	SLPX273M010A4P3	0.027	4.04	22 x 45
27000	SLPX273M010C5P3	0.027	4.04	25 x 35
27000	SLPX273M010E3P3	0.027	3.99	30 x 30
33000	SLPX333M010A9P3	0.022	4.58	22 x 50
33000	SLPX333M010C7P3	0.022	4.56	25 x 40
33000	SLPX333M010E3P3	0.022	4.58	30 x 30
39000	SLPX393M010C4P3	0.019	5.29	25 x 45
39000	SLPX393M010E5P3	0.019	5.21	30 x 35
39000	SLPX393M010H3P3	0.019	5.50	35 x 30
47000	SLPX473M010C9P3	0.016	5.78	25 x 50
47000	SLPX473M010E7P3	0.016	5.78	30 x 40
47000	SLPX473M010H5P3	0.016	5.55	35 x 35
56000	SLPX563M010E4P3	0.013	6.59	30 x 45
56000	SLPX563M010H5P3	0.013	6.40	35 x 35
68000	SLPX683M010E9P3	0.011	7.50	30 x 50
68000	SLPX683M010H7P3	0.011	7.48	35 x 40
82000	SLPX823M010H9P3	0.009	8.50	35 x 50
16 Vdc (20 Vdc Surge)				
8200	SLPX822M016A1P3	0.081	2.56	22 x 35
10000	SLPX103M016A3P3	0.066	2.89	22 x 30
12000	SLPX123M016A3P3	0.055	3.13	22 x 30
12000	SLPX123M016C1P3	0.055	3.01	25 x 25
15000	SLPX153M016A5P3	0.044	3.69	22 x 35
15000	SLPX153M016C3P3	0.044	3.64	25 x 30
15000	SLPX153M016E1P3	0.044	3.73	30 x 25
18000	SLPX183M016A7P3	0.037	3.98	22 x 40
18000	SLPX183M016C5P3	0.037	3.98	25 x 35
18000	SLPX183M016E3P3	0.037	3.88	30 x 30
22000	SLPX223M016A9P3	0.030	4.52	22 x 50
22000	SLPX223M016C7P3	0.030	4.44	25 x 40
22000	SLPX223M016E3P3	0.030	4.38	30 x 30
27000	SLPX273M016C4P3	0.025	4.98	25 x 45
27000	SLPX273M016E5P3	0.025	4.95	30 x 35
27000	SLPX273M016H3P3	0.025	4.82	35 x 30
33000	SLPX333M016C9P3	0.020	5.49	25 x 50
33000	SLPX333M016E7P3	0.020	5.60	30 x 40
33000	SLPX333M016H3P3	0.020	5.46	35 x 30
39000	SLPX393M016E4P3	0.017	6.21	30 x 45
39000	SLPX393M016H5P3	0.017	6.12	35 x 35
47000	SLPX473M016E9P3	0.014	6.93	30 x 50
47000	SLPX473M016H7P3	0.014	6.89	35 x 40
56000	SLPX563M016H4P3	0.012	7.69	35 x 45

Type SLPX 85 °C Aluminum Electrolytic Snap-In Capacitors

Cap μF	Catalog Part Number 3000 h @ 85 °C	Max ESR 120 Hz/25°C (Ω)	Max Ripple 120 Hz/85°C (A _{rms})	Nominal Size (DxL) (mm)
25 Vdc (32 Vdc Surge)				
5600	SLPX562M025A1P3	0.107	2.31	22 x 25
6800	SLPX682M025A3P3	0.088	2.56	22 x 30
8200	SLPX822M025A5P3	0.073	2.86	22 x 35
8200	SLPX822M025C1P3	0.073	2.78	25 x 25
10000	SLPX103M025A5P3	0.060	3.31	22 x 35
10000	SLPX103M025C3P3	0.060	3.16	25 x 30
10000	SLPX103M025E1P3	0.060	3.28	30 x 25
12000	SLPX123M025A7P3	0.050	3.77	22 x 40
12000	SLPX123M025C5P3	0.050	3.63	25 x 35
12000	SLPX123M025E1P3	0.050	3.80	30 x 25
15000	SLPX153M025A9P3	0.040	4.21	22 x 50
15000	SLPX153M025C7P3	0.040	4.10	25 x 40
15000	SLPX153M025E3P3	0.040	4.00	30 x 30
18000	SLPX183M025C4P3	0.033	4.68	25 x 45
18000	SLPX183M025E5P3	0.033	4.66	30 x 35
18000	SLPX183M025H3P3	0.033	4.68	35 x 30
22000	SLPX223M025C9P3	0.027	5.29	25 x 50
22000	SLPX223M025E7P3	0.027	5.33	30 x 40
22000	SLPX223M025H5P3	0.027	5.26	35 x 35
27000	SLPX273M025E4P3	0.022	6.02	30 x 45
27000	SLPX273M025H7P3	0.022	6.02	35 x 40
33000	SLPX333M025E9P3	0.018	5.29	30 x 50
33000	SLPX333M025H4P3	0.018	6.75	35 x 45
39000	SLPX393M025H9P3	0.015	7.56	35 x 50
35 Vdc (44 Vdc Surge)				
3900	SLPX392M035A1P3	0.136	2.22	22 x 25
4700	SLPX472M035A3P3	0.113	2.46	22 x 30
4700	SLPX472M035C1P3	0.113	2.43	25 x 25
5600	SLPX562M035A3P3	0.095	2.61	22 x 30
5600	SLPX562M035A5P3	0.095	2.79	22 x 35
5600	SLPX562M035C3P3	0.095	2.75	25 x 30
6800	SLPX682M035A7P3	0.078	2.97	22 x 40
6800	SLPX682M035C3P3	0.078	2.89	25 x 30
6800	SLPX682M035E1P3	0.078	3.09	30 x 25
8200	SLPX822M035A4P3	0.065	3.47	22 x 45
8200	SLPX822M035C5P3	0.065	3.33	25 x 35
8200	SLPX822M035E3P3	0.065	3.29	30 x 30
10000	SLPX103M035A9P3	0.053	3.75	22 x 50
10000	SLPX103M035C7P3	0.053	3.65	25 x 40
10000	SLPX103M035E3P3	0.053	3.61	30 x 30
12000	SLPX123M035C4P3	0.044	4.15	25 x 45
12000	SLPX123M035E5P3	0.044	4.14	30 x 35
12000	SLPX123M035H3P3	0.044	4.27	35 x 30
15000	SLPX153M035C9P3	0.035	4.77	25 x 50
15000	SLPX153M035E7P3	0.035	4.80	30 x 40
15000	SLPX153M035H5P3	0.035	4.95	35 x 35
18000	SLPX183M035E4P3	0.029	5.30	30 x 45
18000	SLPX183M035H7P3	0.029	5.71	35 x 40
22000	SLPX223M035H4P3	0.024	6.38	35 x 45
27000	SLPX273M035H9P3	0.020	6.90	35 x 50
50 Vdc (63 Vdc Surge)				
2200	SLPX222M050A1P3	0.211	1.93	22 x 25
2700	SLPX272M050A3P3	0.172	2.21	22 x 30
3300	SLPX332M050A3P3	0.141	2.41	22 x 30
3300	SLPX332M050C1P3	0.141	2.38	25 x 25
3900	SLPX392M050A5P3	0.119	2.72	22 x 35
3900	SLPX392M050C3P3	0.119	2.68	25 x 30
4700	SLPX472M050A7P3	0.099	3.02	22 x 40
4700	SLPX472M050C3P3	0.099	3.07	25 x 30
4700	SLPX472M050E1P3	0.099	3.01	30 x 25

Type SLPX 85 °C Aluminum Electrolytic Snap-In Capacitors

Cap μF	Catalog Part Number 3000 h @ 85 °C	Max ESR 120 Hz/25°C (Ω)	Max Ripple 120 Hz/85°C (A _{rms})	Nominal Size (DxL) (mm)
50 Vdc (63 Vdc Surge)				
5600	SLPX562M050A7P3	0.083	3.26	22 x 40
5600	SLPX562M050A4P3	0.083	3.43	22 x 45
5600	SLPX562M050C5P3	0.083	3.47	25 x 35
5600	SLPX562M050E3P3	0.083	3.43	30 x 30
6800	SLPX682M050A9P3	0.068	3.94	22 x 50
6800	SLPX682M050C7P3	0.068	3.87	25 x 40
6800	SLPX682M050E5P3	0.068	3.93	30 x 35
8200	SLPX822M050C4P3	0.057	4.44	25 x 45
8200	SLPX822M050E5P3	0.057	4.47	30 x 35
8200	SLPX822M050H3P3	0.057	4.41	35 x 30
10000	SLPX103M050E7P3	0.046	5.08	30 x 40
10000	SLPX103M050H5P3	0.046	4.92	35 x 35
12000	SLPX123M050E9P3	0.039	5.72	30 x 50
12000	SLPX123M050H7P3	0.039	5.69	35 x 40
15000	SLPX153M050H4P3	0.031	6.56	35 x 45
18000	SLPX183M050H9P3	0.026	7.14	35 x 50
22000	SLPX223M050H9P3	0.021	7.89	35 x 50
63 Vdc (79 Vdc Surge)				
1800	SLPX182M063A1P3	0.221	1.90	22 x 25
2200	SLPX222M063A3P3	0.181	2.35	22 x 30
2200	SLPX222M063C1P3	0.181	2.30	25 x 25
2700	SLPX272M063A5P3	0.147	2.50	22 x 35
2700	SLPX272M063C3P3	0.147	2.52	25 x 30
3300	SLPX332M063A7P3	0.121	2.72	22 x 40
3300	SLPX332M063C3P3	0.121	2.74	25 x 30
3300	SLPX332M063E1P3	0.121	2.78	30 x 25
3900	SLPX392M063A4P3	0.102	3.09	22 x 45
3900	SLPX392M063C5P3	0.102	3.13	25 x 35
3900	SLPX392M063E3P3	0.102	3.09	30 x 30
4700	SLPX472M063A9P3	0.085	3.69	22 x 50
4700	SLPX472M063C7P3	0.085	3.59	25 x 40
4700	SLPX472M063E3P3	0.085	3.54	30 x 30
5600	SLPX562M063C4P3	0.071	4.01	25 x 45
5600	SLPX562M063E5P3	0.071	4.00	30 x 35
5600	SLPX562M063H3P3	0.071	3.75	35 x 30
6800	SLPX682M063C9P3	0.059	4.52	25 x 50
6800	SLPX682M063E7P3	0.059	4.55	30 x 40
6800	SLPX682M063H3P3	0.059	4.44	35 x 30
8200	SLPX822M063E4P3	0.049	5.12	30 x 45
8200	SLPX822M063H5P3	0.049	5.05	35 x 35
10000	SLPX103M063E9P3	0.040	5.78	30 x 50
10000	SLPX103M063H7P3	0.040	5.75	35 x 40
12000	SLPX123M063E9P3	0.033	6.20	30 x 50
12000	SLPX123M063E9P3	0.033	6.20	30 x 50
12000	SLPX123M063H4P3	0.033	6.47	35 x 45
12000	SLPX123M063H9P3	0.033	6.76	35 x 50
80 Vdc (100 Vdc Surge)				
1200	SLPX122M080A1P3	0.276	1.77	22 x 25
1500	SLPX152M080A3P3	0.221	2.01	22 x 30
1800	SLPX182M080A3P3	0.184	2.11	22 x 30
1800	SLPX182M080C1P3	0.184	2.26	25 x 25
2200	SLPX222M080A7P3	0.151	2.53	22 x 40
2200	SLPX222M080C3P3	0.151	2.53	25 x 30
2200	SLPX222M080E1P3	0.151	2.56	30 x 25
2700	SLPX272M080A4P3	0.123	2.93	22 x 45
2700	SLPX272M080C5P3	0.123	2.93	25 x 35
2700	SLPX272M080E3P3	0.123	2.91	30 x 30
3300	SLPX332M080A9P3	0.101	3.23	22 x 50
3300	SLPX332M080C7P3	0.101	3.29	25 x 40

Type SLPX 85 °C Aluminum Electrolytic Snap-In Capacitors

Cap μF	Catalog Part Number 3000 h @ 85 °C	Max ESR 120 Hz/25°C (Ω)	Max Ripple 120 Hz/85°C (A _{rms})	Nominal Size (DxL) (mm)
80 Vdc (100 Vdc Surge)				
3300	SLPX332M080E3P3	0.101	3.25	30 x 30
3900	SLPX392M080C4P3	0.085	3.62	25 x 45
3900	SLPX392M080E5P3	0.085	3.70	30 x 35
4700	SLPX472M080C9P3	0.071	4.28	25 x 50
4700	SLPX472M080E7P3	0.071	4.23	30 x 40
4700	SLPX472M080H3P3	0.071	4.12	35 x 30
5600	SLPX562M080E4P3	0.059	4.70	30 x 45
5600	SLPX562M080H5P3	0.059	4.64	35 x 35
6800	SLPX682M080E9P3	0.049	5.27	30 x 50
6800	SLPX682M080H7P3	0.049	5.24	35 x 40
8200	SLPX822M080H4P3	0.040	5.89	35 x 45
10000	SLPX103M080E9P3	0.033	6.63	35 x 50
100 Vdc (125 Vdc Surge)				
820	SLPX821M100A1P3	0.324	1.86	22 x 25
1000	SLPX102M100A3P3	0.265	2.02	22 x 30
1200	SLPX122M100A3P3	0.221	2.12	22 x 30
1200	SLPX122M100C1P3	0.221	2.11	25 x 25
1500	SLPX152M100A5P3	0.177	2.45	22 x 35
1500	SLPX152M100C3P3	0.177	2.47	25 x 30
1800	SLPX182M100A7P3	0.147	2.77	22 x 40
1800	SLPX182M100C5P3	0.147	2.81	25 x 35
1800	SLPX182M100E1P3	0.147	2.65	30 x 25
2200	SLPX222M100A4P3	0.121	3.15	22 x 45
2200	SLPX222M100C7P3	0.121	3.21	25 x 40
2200	SLPX222M100E3P3	0.121	3.17	30 x 30
2700	SLPX272M100C4P3	0.098	3.66	25 x 45
2700	SLPX272M100E5P3	0.098	3.65	30 x 35
2700	SLPX272M100H3P3	0.098	3.77	35 x 30
3300	SLPX332M100C9P3	0.080	4.15	25 x 50
3300	SLPX332M100E7P3	0.080	4.18	30 x 40
3300	SLPX332M100H5P3	0.080	4.07	35 x 35
3900	SLPX392M100E4P3	0.068	4.67	30 x 45
3900	SLPX392M100H5P3	0.068	4.61	35 x 35
4700	SLPX472M100H7P3	0.056	5.23	35 x 40
4700	SLPX472M100E9P3	0.056	5.26	30 x 50
4700	SLPX472M100H7P3	0.056	5.23	35 x 40
5600	SLPX562M100H4P3	0.047	5.88	35 x 45
6800	SLPX682M100H9P3	0.039	6.01	35 x 50
160 Vdc (200 Vdc Surge)				
390	SLPX391M160A1P3	0.510	1.63	22 x 25
470	SLPX471M160A3P3	0.423	1.86	22 x 30
470	SLPX471M160C1P3	0.423	1.86	25 x 25
560	SLPX561M160A3P3	0.355	2.15	22 x 30
560	SLPX561M160C3P3	0.355	2.15	25 x 30
680	SLPX681M160A7P3	0.293	2.35	22 x 40
680	SLPX681M160C3P3	0.293	2.33	25 x 30
680	SLPX681M160E1P3	0.293	2.33	30 x 25
820	SLPX821M160A4P3	0.243	2.68	22 x 45
820	SLPX821M160C5P3	0.243	2.65	25 x 35
820	SLPX821M160E3P3	0.243	2.64	30 x 30
1000	SLPX102M160A9P3	0.199	3.02	22 x 50
1000	SLPX102M160C7P3	0.199	3.00	25 x 40
1000	SLPX102M160E3P3	0.199	2.96	30 x 30
1200	SLPX122M160C4P3	0.166	3.43	25 x 45
1200	SLPX122M160E5P3	0.166	3.41	30 x 35
1200	SLPX122M160H3P3	0.166	3.40	35 x 30
1500	SLPX152M160E7P3	0.133	3.96	30 x 40

Type SLPX 85 °C Aluminum Electrolytic Snap-In Capacitors

Cap μF	Catalog Part Number 3000 h @ 85 °C	120 Hz/25°C (Ω)	Max Ripple 120 Hz/85°C (A _{rms})	Nominal Size (DxL) (mm)
160 Vdc (200 Vdc Surge)				
1500	SLPX152M160H5P3	0.133	3.94	35 x 35
1800	SLPX182M160E4P3	0.111	4.31	30 x 45
1800	SLPX182M160H5P3	0.111	4.28	35 x 35
2200	SLPX222M160H7P3	0.090	4.96	35 x 40
2700	SLPX272M160H9P3	0.074	5.57	35 x 50
180 Vdc (225 Vdc Surge)				
330	SLPX331M180A1P3	0.603	1.49	22 x 25
390	SLPX391M180A1P3	0.510	1.84	22 x 25
470	SLPX471M180A3P3	0.423	1.91	22 x 30
470	SLPX471M180C1P3	0.423	2.08	25 x 25
560	SLPX561M180A5P3	0.355	2.25	22 x 35
560	SLPX561M180C1P3	0.355	2.25	25 x 25
680	SLPX681M180A5P3	0.293	2.48	22 x 35
680	SLPX681M180C3P3	0.293	2.50	25 x 30
680	SLPX681M180E1P3	0.293	2.46	30 x 25
820	SLPX821M180A7P3	0.243	2.86	22 x 40
820	SLPX821M180C5P3	0.243	2.75	25 x 35
820	SLPX821M180E1P3	0.243	2.69	30 x 25
1000	SLPX102M180C7P3	0.199	3.06	25 x 40
1000	SLPX102M180E3P3	0.199	3.10	30 x 30
1200	SLPX122M180C4P3	0.166	3.63	25 x 45
1200	SLPX122M180E5P3	0.166	3.55	30 x 35
1200	SLPX122M180H3P3	0.166	3.49	35 x 30
1500	SLPX152M180E7P3	0.133	4.10	30 x 40
1500	SLPX152M180H5P3	0.133	4.02	35 x 35
1800	SLPX182M180E4P3	0.111	4.55	30 x 45
1800	SLPX182M180H5P3	0.111	4.54	35 x 35
2200	SLPX222M180H7P3	0.090	4.83	35 x 40
2700	SLPX272M180H9P3	0.074	5.30	35 x 50
200 Vdc (250 Vdc Surge)				
270	SLPX271M200A1P3	0.737	1.37	22 x 25
330	SLPX331M200A3P3	0.603	1.63	22 x 30
330	SLPX331M200A1P3	0.603	1.51	22 x 25
390	SLPX391M200A3P3	0.510	1.73	22 x 30
390	SLPX391M200C1P3	0.510	1.71	25 x 25
470	SLPX471M200A3P3	0.423	1.97	22 x 30
470	SLPX471M200C3P3	0.423	1.95	25 x 30
560	SLPX561M200A7P3	0.355	2.18	22 x 40
560	SLPX561M200C3P3	0.355	2.15	25 x 30
560	SLPX561M200E1P3	0.355	2.15	30 x 25
680	SLPX681M200A4P3	0.293	2.48	22 x 45
680	SLPX681M200C5P3	0.293	2.48	25 x 35
680	SLPX681M200E3P3	0.293	2.48	30 x 30
820	SLPX821M200A9P3	0.243	2.81	22 x 50
820	SLPX821M200C7P3	0.243	2.79	25 x 40
820	SLPX821M200E3P3	0.243	2.75	30 x 30
1000	SLPX102M200C4P3	0.199	3.28	25 x 45
1000	SLPX102M200E5P3	0.199	3.15	30 x 35
1000	SLPX102M200H3P3	0.199	3.25	35 x 30
1200	SLPX122M200C9P3	0.166	3.61	25 x 50
1200	SLPX122M200E7P3	0.166	3.61	30 x 40
1200	SLPX122M200E4P3	0.166	3.80	30 x 45
1200	SLPX122M200H5P3	0.166	3.57	35 x 35
1500	SLPX152M200E4P3	0.133	4.13	30 x 45
1500	SLPX152M200H5P3	0.133	3.85	35 x 35

Type SLPX 85 °C Aluminum Electrolytic Snap-In Capacitors

Cap µF	Catalog Part Number 3000 h @ 85 °C	Max ESR 120 Hz/25°C (Ω)	Max Ripple 120 Hz/85°C (A _{rms})	Nominal Size (DxL) (mm)
200 Vdc (250 Vdc Surge)				
1500	SLPX152M200H7P3	0.133	4.06	35 x 40
1500	SLPX152M200H4P3	0.133	4.26	35 x 45
1800	SLPX182M200H4P3	0.111	4.59	35 x 45
2200	SLPX222M200H9P3	0.090	5.25	35 x 50
220 Vdc (270 Vdc Surge)				
220	SLPX221M220A1P3	0.905	1.30	22 x 25
270	SLPX271M220A1P3	0.737	1.42	22 x 25
330	SLPX331M220A3P3	0.603	1.59	22 x 30
330	SLPX331M220C1P3	0.603	1.59	25 x 25
390	SLPX391M220A5P3	0.510	1.80	22 x 35
390	SLPX391M220C1P3	0.510	1.75	25 x 25
470	SLPX471M220A5P3	0.423	2.06	22 x 35
470	SLPX471M220C3P3	0.423	2.08	25 x 30
470	SLPX471M220E1P3	0.423	2.16	30 x 25
560	SLPX561M220A7P3	0.355	2.22	22 x 40
560	SLPX561M220C5P3	0.355	2.38	25 x 35
560	SLPX561M220E1P3	0.355	2.18	30 x 25
680	SLPX681M220A4P3	0.293	2.62	22 x 45
680	SLPX681M220C7P3	0.293	2.56	25 x 40
680	SLPX681M220E3P3	0.293	2.52	30 x 30
820	SLPX821M220C4P3	0.243	2.91	25 x 45
820	SLPX821M220E5P3	0.243	2.84	30 x 35
820	SLPX821M220H3P3	0.243	2.79	35 x 30
1000	SLPX102M220C9P3	0.199	3.53	25 x 50
1000	SLPX102M220E7P3	0.199	3.36	30 x 40
1000	SLPX102M220H3P3	0.199	3.29	35 x 30
1200	SLPX122M200E7P3	0.166	3.54	30 x 40
1200	SLPX122M220E4P3	0.166	3.72	30 x 45
1200	SLPX122M220H5P3	0.166	3.68	35 x 35
1500	SLPX152M220H7P3	0.133	4.10	35 x 40
1800	SLPX182M220H4P3	0.111	4.52	35 x 45
250 Vdc (300 Vdc Surge)				
220	SLPX221M250A1P3	0.905	1.24	22 x 25
270	SLPX271M250A3P3	0.737	1.50	22 x 30
330	SLPX331M250A3P3	0.603	1.66	22 x 30
330	SLPX331M250C1P3	0.603	1.61	25 x 25
390	SLPX391M250A5P3	0.510	1.88	22 x 35
390	SLPX391M250C3P3	0.510	1.88	25 x 30
470	SLPX471M250A7P3	0.423	2.15	22 x 40
470	SLPX471M250C5P3	0.423	2.15	25 x 35
470	SLPX471M250E1P3	0.423	2.04	30 x 25
560	SLPX561M250A4P3	0.355	2.48	22 x 45
560	SLPX561M250C5P3	0.355	2.35	25 x 35
560	SLPX561M250E3P3	0.355	2.35	30 x 30
680	SLPX681M250C7P3	0.293	2.67	25 x 40
680	SLPX681M250E5P3	0.293	2.71	30 x 35
820	SLPX821M250C9P3	0.243	3.01	25 x 50
820	SLPX681M250E5P3	0.243	2.98	30 x 35
820	SLPX821M250H3P3	0.243	2.96	35 x 30
1000	SLPX102M250E5P3	0.199	3.20	30 x 35
1000	SLPX102M250E4P3	0.199	3.56	30 x 45
1000	SLPX102M250E9P3	0.199	3.73	30 x 50
1000	SLPX102M250H5P3	0.199	3.48	35 x 35
1200	SLPX122M250E9P3	0.166	3.99	30 x 50
1200	SLPX122M250H7P3	0.166	3.84	35 x 40
1500	SLPX152M250H4P3	0.133	4.33	35 x 45
1800	SLPX182M250H9P3	0.111	4.54	35 x 50