



Features


- Thin film construction
- Hermetic package
- Operating temperature range : $-55^{\circ}\text{C} \sim +85^{\circ}\text{C}$

Specifications(measured in a 50Ω system , $\text{Vcc}=+5\text{V}$, $\text{T}_{\text{A}}=-55^{\circ}\text{C} \sim +85^{\circ}\text{C}$)

Parameter	Symbol	Unit	Guaranteed	Typical
Frequency Range	$f_{\text{L}} \sim f_{\text{H}}$	MHz	20~1000	—
Attenuation(Max)	A_{Max}	dB	40. 0	—
Insertion loss	IL	dB	2. 8	2. 5
VSWR of input/output	VSWR	—	1. 8 : 1	1. 5 : 1
VSWR of output	VSWR	V	1. 8 : 1	1. 5 : 1
DC Current	I_{cc}	mA	—	10
Control voltage/Current	$V_{\text{co}}/I_{\text{co}}$	V/mA	—	0~7/0~10


Absolute Maximum Ratings

DC Supply: $+7\text{V}_{\text{DC}}$
 Input Power: $+23\text{dBm}$
 Storage Temp: $+125^{\circ}\text{C}$

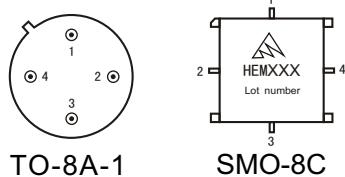

Application Notes

1. Functional schematic shown as following, which include an internal coupling capacitor.
2. Interexchangeable input and output ports
3. See assembly section for mounting method

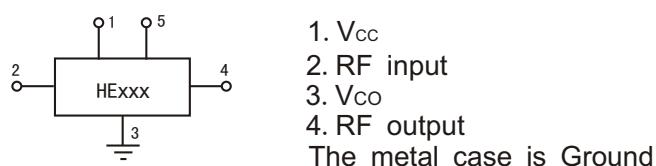

Typical Performance

