



SP16T Switch

The content of this specification may change without notification 7/01/09




SP16T Switch

P/N: JXWBKG-T-16-0.4-6

| | |
|----------------------------------|-----------------------------|
| Frequency Range(GHz) | 0.4-6 |
| Switch Type | Absorptive |
| Insertion Loss(dB) | 5 max |
| VSWR | 2.0 max |
| Isolation(dB) | 35 min, 50 typ. |
| Power Handling(dBm) | 33 max (on the output port) |
| Switch Speed(μ s) | 1 |
| Control Voltage(V) | ± 5 |
| Connector | SMA-Female |
| Temperature Range($^{\circ}$ C) | -55 - +85 |
| ROHS Compliant | Yes |

Outline Drawing (Size: mm)

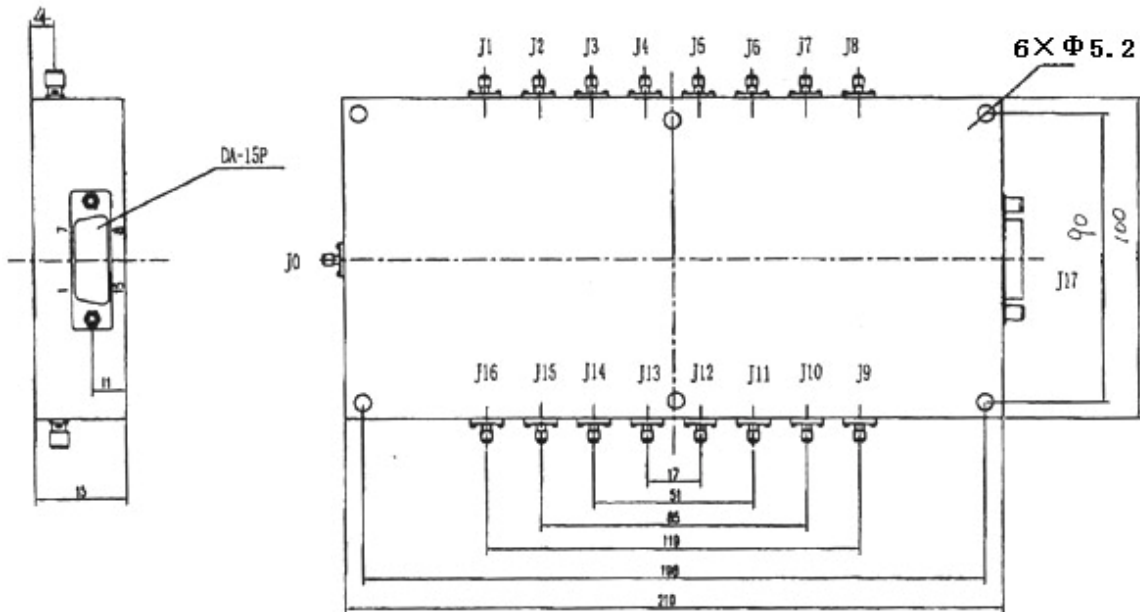

For current data sheets, please contact: sales@aacix.com