



LLHB5402-0665-G (665MHz:470~860MHz)

Configuration, Dimensions

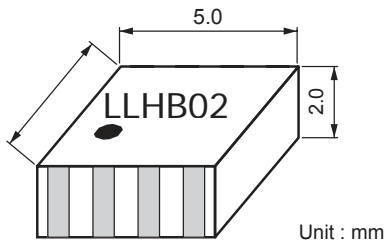

Unit : mm

Schematics

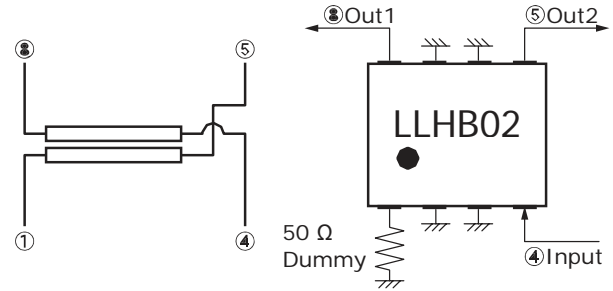


- ① Termination
- ②,③ GND
- ④ Input Port
- ⑤ Out2 Port (0 deg.)
- ⑥,⑦ GND
- ⑧ Out1 Port (-90 deg.)

Specification

Style No.	Insertion Loss [dB]	Isolation [dB]	Amplitude Balance [dB]	Phase Balance [deg.]	VSWR	Max. Input Power [W]
LLHB5402-0665-G	3.2±1	15.0 min.	0.6 max.	90±3	1.7 max.	3 max.

* Operating Temperature Range -30 ~ +85 C
 * This Products is made with RoHS.

Typical Performance

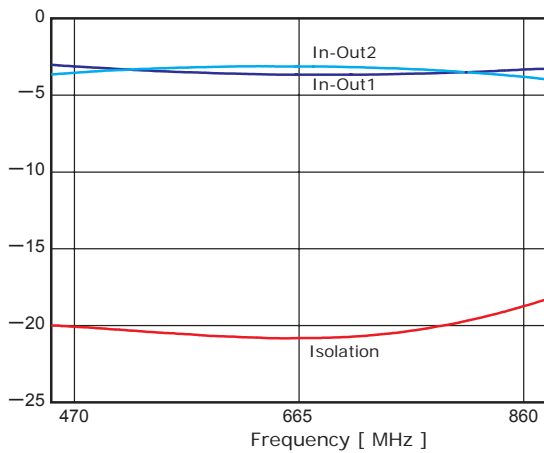

Recommendable Footprint

