

## Features

- Small Size and Low Profile
- Superior Repeatability
- Typical Insertion Loss 0.5 dB
- Typical Rejection 20 dB
- 2 Watt Power Handling
- Lead-Free SO-8 Package
- 100% Matte Tin Plating over Copper
- Halogen-Free “Green” Mold Compound
- 260°C Reflow Compatible
- RoHS\* Compliant Version of FL05-0002-G


## Description

M/A-COM’s MAFLCC0005 is an IC-based monolithic high pass filter in a low cost SOIC-8 plastic package. This filter is ideally suited for applications where small size, low cost and low loss are required.

Typical applications include base station switching networks and portable phones where size and PCB real estate are at a premium. Available in tape and reel.

The MAFLCC0005 is fabricated using a passive-integrated circuit process. The process features full-chip passivation for increased performance and reliability.

## Functional Block Diagram

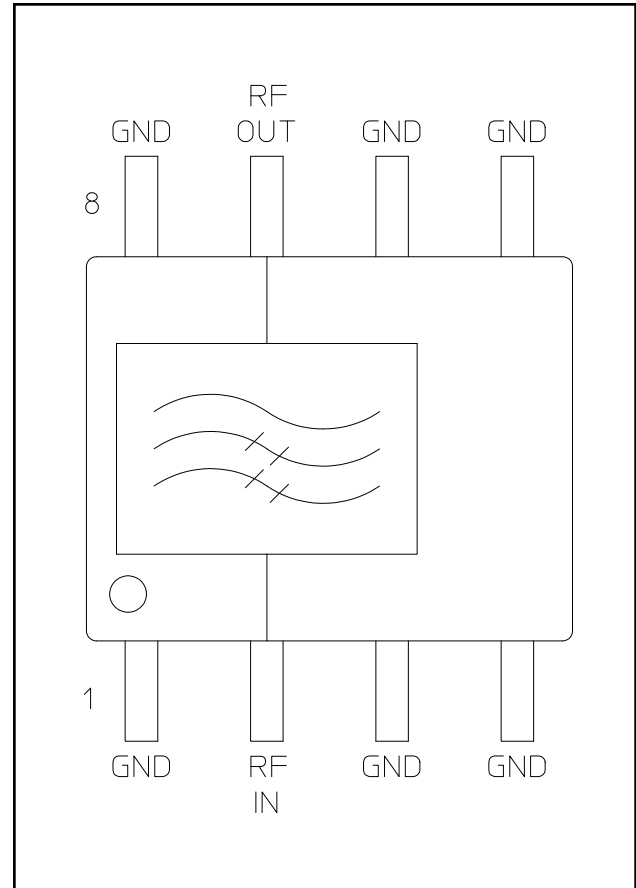

## Ordering Information

Part Number	Package
MAFLCC0005	Bulk Packaging
MAFLCC0005-TR	1000 piece reel
MAFLCC0005-TB	Sample Test Board

Note: Reference Application Note M513 for reel size information.

## Pin Configuration

Pin No.	Function	Pin No.	Function
1	GND	5	GND
2	RF IN	6	GND
3	GND	7	RF OUT
4	GND	8	GND

\* Restrictions on Hazardous Substances, European Union Directive 2002/95/EC.

## Electrical Specifications: $T_A = 25^\circ\text{C}$ , $Z_0 = 50\Omega$

Parameter	Units	Min	Typ	Max
Insertion Loss: 1700 – 3000 MHz	dB	—	0.5	1.0
VSWR: 1700 – 3000 MHz	—	—	1.5:1	1.8:1
Rejection: DC – 1000 MHz	dB	15	20	—

## Absolute Maximum Ratings <sup>1,2</sup>

Parameter	Absolute Maximum
Input Power	2 W CW
Operating Temperature	-40°C to +85°C
Storage Temperature	-65°C to +150°C

- Exceeding any one or combination of these limits may cause permanent damage to this device.
- M/A-COM does not recommend sustained operation near these survivability limits.

## Handling Procedures


Please observe the following precautions to avoid damage:

## Static Sensitivity


GMIC Circuits are sensitive to electrostatic discharge (ESD) and can be damaged by static electricity. Proper ESD control techniques should be used when handling these devices.

## Typical Performance Curves @ 25°C

Insertion Loss vs. Frequency

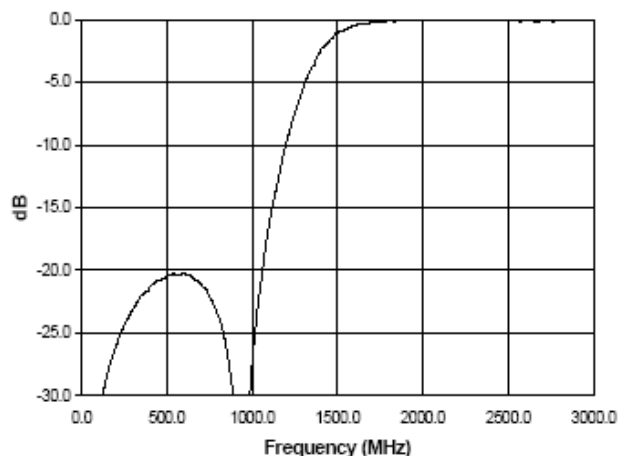

VSWR vs. Frequency

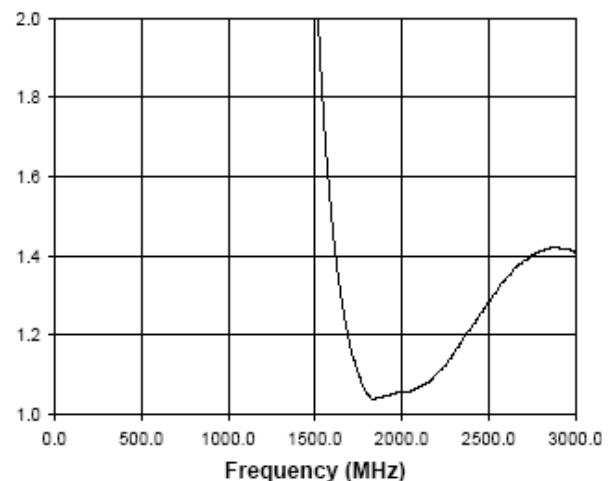


# MAFLCC0005

Low Cost SMT High Pass Filter  
1700 – 3000 MHz

Rev. V2

Lead-Free, SOIC-8<sup>†</sup>

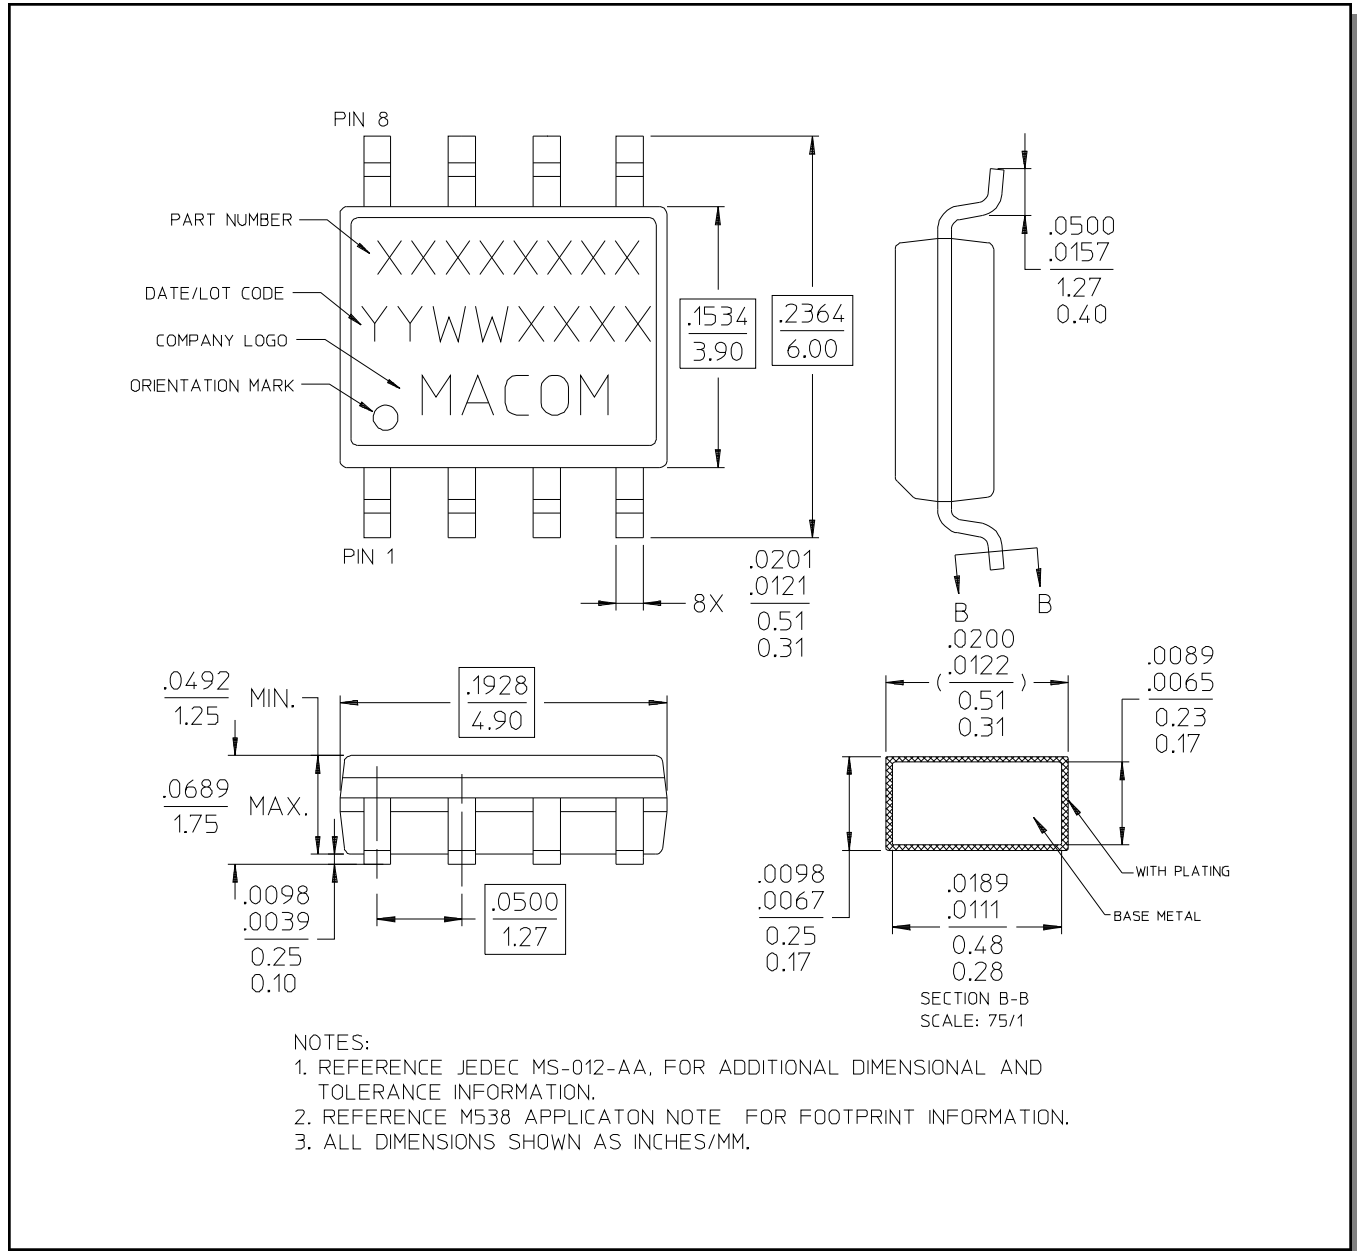

<sup>†</sup> Reference Application Note M538 for lead-free solder reflow recommendations.