



1. Dimensions:

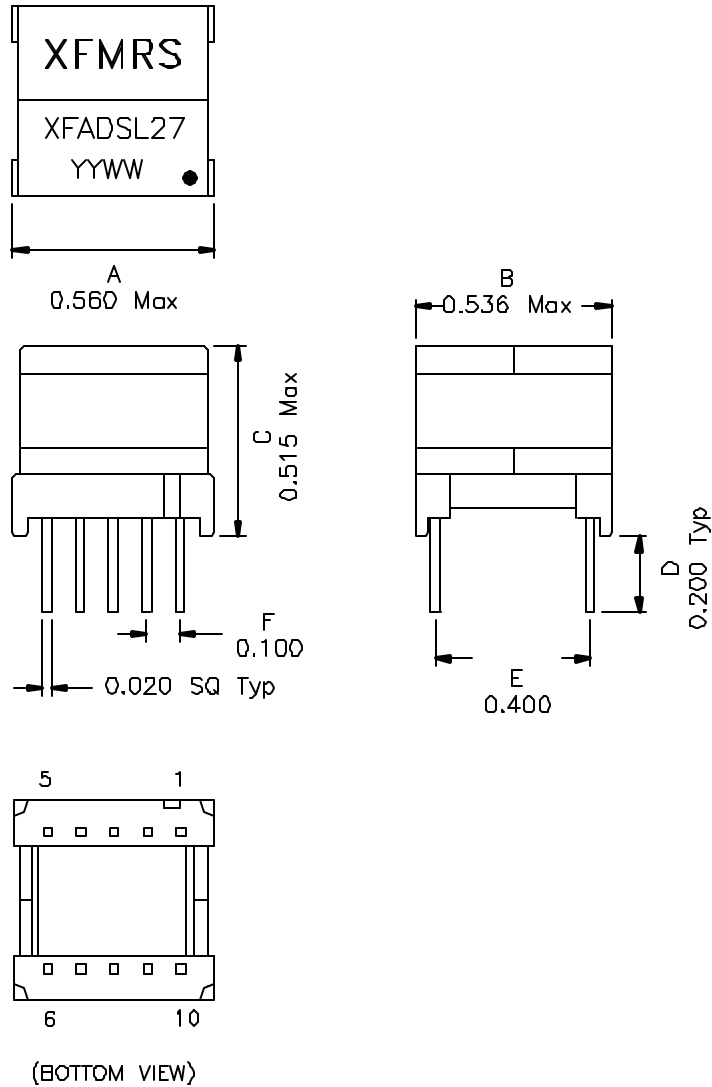

2.Schematic:



3.Electrical Specifications: @25°C

- PIN1-4 OCL: 1.5mH ±10% @10KHz 0.1V 0mA_{dc} (CONNECT PIN3-2)
- PIN1-4 LL: 12uH Max @100KHz 100mV (CONNECT PIN 3-2, Short10-7)
- PIN1-10 Cw/w: 35pF Max @100KHz 100mV
- URNS RATIO: (10-7):(1-4) = 1:1.95±1% tie(8+9, 3+2)
- DC Res.: Pins 1-4 2.0 Ohms Max (Short 3-2)
- ISOLATION VOLTAGE: 1500Vrms (Chip to Line)
- OPERATING TEMP: -40 TO 85°C

UL1950 approved for the requirements of Supplementary Insulation with 300 working volts. UL file #E165866

XFMRS Inc UNLESS OTHERWISE SPECIFIED TOLERANCES: .xxx ±0.010 Dimensions in INCH	Title: ADSL TRANSFORMER	
	P/N: XFADSL27	REV. A
	DWN. 廖玉坤	Aug-31-00
	CHK. 李清儿	Aug-31-00
SHEET 1 OF 1	APP. Joe Huff	Aug-31-00

DOC. REV A/2