




TERMINAL BLOCKS

- 5.08mm pitch
- Flame Retardant Material
- 2.5mm² wire acceptance
- UL/ CSA approved
- Interlocking
- Professional rising clamp

5.08mm PITCH 90° MOUNT

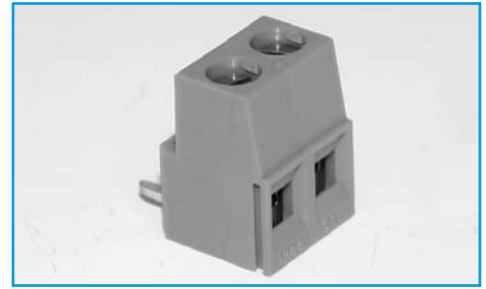


SPECIFICATION

Rating: 20A/250V
Dielectric Strength: ≥2.5KV/60sec
Insulation Resistance: ≥5MΩ
Working temperature: -20°C to 125°C
Short Period: 160°
Moulding: UL94V-0 flame retardant PA66

Pin/terminal: 5μ tinned, nickel plated brass
Wire protector: Nickel plated brass
Screw/torque: M3 steel, 6μ zinc colour passivated and tropicalised/0.5Nm
Recommended PCB hole size: ø1.3mm

OUTLINE DRAWING



ORDERING INFORMATION

DBC	TB	85	/2
Dubilier Connectors	Series Terminal Block	Style	N° of Ways
			2 = 2 ways 3 = 3 ways
* Other Number of ways are available up to 12 Please consult office for further details			