


- T1/CEPT Line Interface •
- Operating temperature from -40°C to +85°C

Electrical Parameters @ 25° C

OCL (1)(mH Min.)		Leakage Inductance (1)(μH Max.)	Interwinding Capacitance (pF Max.)	ET Product (1)(VμS Min.)	Hipot (Vrms)	DCR (Ohms Max.)	
						Pri	Sec
1.50 @ 25°C	0.600 @ -40°C	0.60	35	10	2000	0.70	1.10

- Note: 1) Measured at Primary. •

Schematic

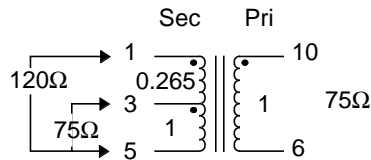

Dimensions

Dim.	(Inches)			(Millimeters)		
	Min.	Max.	Nom.	Min.	Max.	Nom.
A	.540	.560		13.72	14.22	
B	.540	.560		13.72	14.22	
C	.360	.380		9.14	9.65	
D	.400	Typ.		10.16	Typ.	
E	.020	.040		0.508	1.016	
F	.200	Typ.		5.08	Typ.	
G	.400	.410		10.16	10.41	
H	.025	Typ.		0.635	Typ.	
I	.120	.140		3.05	3.56	

Package

