



PL00182 Series Bi-Color SMD LED 1210 Package

Features

- *Flat Lens Package 3.2 x 2.7 x 1.1 mm
- *GaAsP Hi-Eff Red and GaP Green Chips used
- *High Light Output
- *Compatible with IR Solder-Process
- *Industry Standard Footprint
- *3000 pcs. per Reel
- *RoHS Compliant


Absolute Maximum Ratings at T_A = 25 °C

Power Dissipation (Red).....	78mW
Power Dissipation (Green).....	78mW
Reverse Voltage (<100µA).....	5.0V
Max Forward Current.....	30mA
Peak Forward Current (1/10 Duty Cycle, 0.1ms Pulse Width).....	100mA
Operating Temperature Range.....	-30°C to + 80°C
Storage Temperature Range.....	-40°C to + 85°C
Reflow Soldering Temperature.....	260°C for 10 seconds

Electrical & Optical Characteristics at T_A = 25 °C

Part Number	Emitting Color	Chip Material	Dominant Wave Length	Peak Wave Length	Viewing Angle 2θ ½	Forward Voltage @20mA (V)		Luminous Intensity @20mA (mcd)	
						Typ	Max	Min	Typ
Water Clear Lens			nm	nm	Deg	Typ	Max	Min	Typ
PL00182-WCRG2713	Orange-Red Green	GaAsP GaP	628 570	640 568	130°	2.1 2.2	2.6 2.6	6.0 8.0	12.0 15.0

Package Dimensions are in **Millimeters**. Tolerance is ± 0.1mm unless otherwise specified.

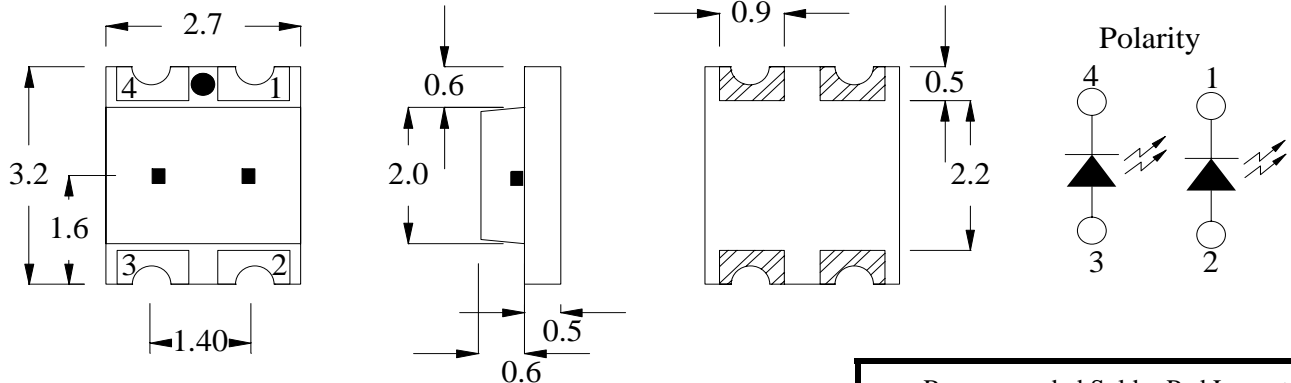

Recommended Solder Pad Layout

