


Avionics Pulsed Power Transistor
350W, 1025-1150 MHz, 10µs Pulse, 1% Duty

M/A-COM Products
Released, 14 Sep 2007

Features

- NPN silicon microwave power transistors
- Common base configuration
- Broadband Class C operation
- High efficiency inter-digitized geometry
- Diffused emitter ballasting resistors
- Gold metallization system
- Internal input and output impedance matching
- Hermetic metal/ceramic package
- RoHS Compliant

Outline Drawing

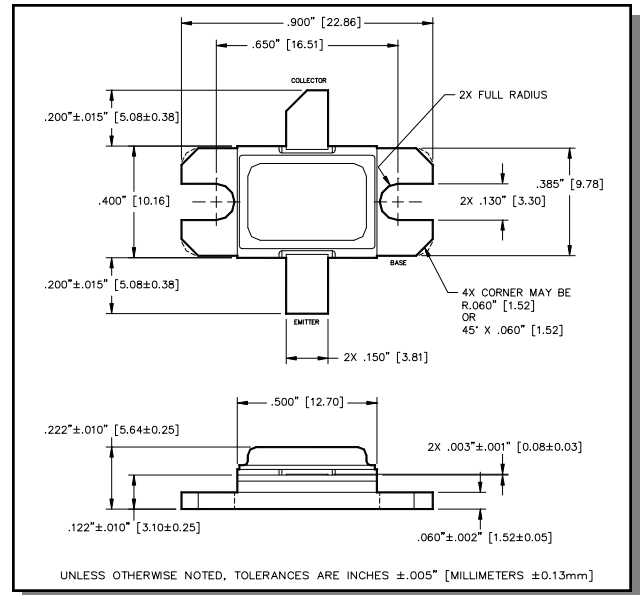

Absolute Maximum Ratings at 25°C

Parameter	Symbol	Rating	Units
Collector-Emitter Voltage	V_{CES}	65	V
Emitter-Base Voltage	V_{EBO}	3.0	V
Collector Current (Peak)	I_C	25	A
Power Dissipation @ +25°C	P_{TOT}	1.1	kW
Storage Temperature	T_{STG}	-65 to +200	°C
Junction Temperature	T_J	200	°C

Electrical Specifications: $T_C = 25 \pm 5^\circ\text{C}$ (Room Ambient)

Parameter	Test Conditions	Frequency	Symbol	Min	Max	Units
Collector-Emitter Breakdown Voltage	$I_C = 250\text{mA}$		BV_{CES}	65	-	V
Collector-Emitter Leakage Current	$V_{CE} = 50\text{V}$		I_{CES}	-	15	mA
Thermal Resistance	$V_{CC} = 50\text{V}$, $P_{out} = 350\text{W}$	$F = 1090\text{ MHz}$	$R_{TH(JC)}$	-	0.16	°C/W
Input Power	$V_{CC} = 50\text{V}$, $P_{out} = 350\text{W}$	$F = 1090\text{ MHz}$	P_{IN}	-	44	W
Power Gain	$V_{CC} = 50\text{V}$, $P_{out} = 350\text{W}$	$F = 1090\text{ MHz}$	G_P	9.0	-	dB
Collector Efficiency	$V_{CC} = 50\text{V}$, $P_{out} = 350\text{W}$	$F = 1090\text{ MHz}$	η_C	45	-	%
Input Return Loss	$V_{CC} = 50\text{V}$, $P_{out} = 350\text{W}$	$F = 1090\text{ MHz}$	RL	-	-9	dB
Load Mismatch Tolerance	$V_{CC} = 50\text{V}$, $P_{out} = 350\text{W}$	$F = 1090\text{ MHz}$	VSWR-T	-	10:1	-
Load Mismatch Stability	$V_{CC} = 50\text{V}$, $P_{out} = 350\text{W}$	$F = 1090\text{ MHz}$	VSWR-S	-	1.5:1	-

Avionics Pulsed Power Transistor
350W, 1025-1150 MHz, 10µs Pulse, 1% Duty


M/A-COM Products
Released, 14 Sep 2007

Typical Broadband RF Performance


(Provided for information only - 100% Production testing performed at 1090MHz only)

Freq. (MHz)	Pin (W)	Pout (W)	Gain (dB)	Ic (A)	Eff (%)	RL (dB)	VSWR-S (1.5:1)	VSWR-T (10:1)
1025	37	350	9.81	12.8	54.6	-14.8	S	P
1090	35	350	9.96	12.5	55.8	-16.7	S	P
1150	34	350	10.10	12.4	56.6	-26.1	S	P

Gain vs. Frequency

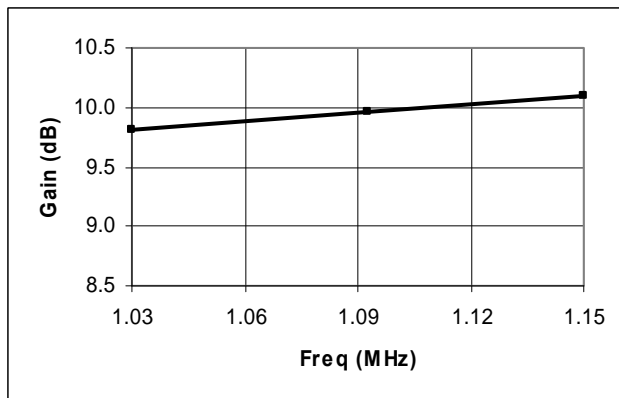


Collector Efficiency vs. Frequency

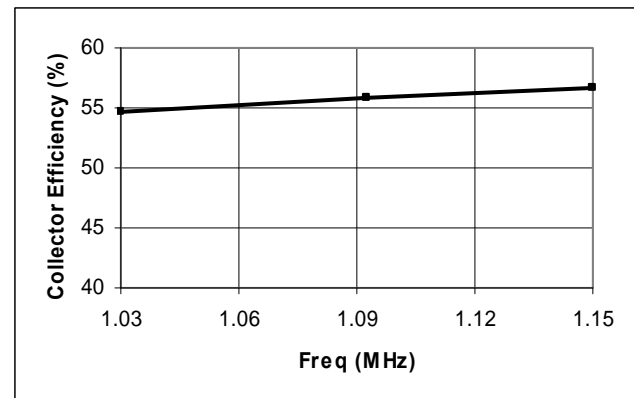

RF Test Fixture Impedance


F (MHz)	Z _{IF} (Ω)	Z _{OF} (Ω)
960	1.8 - j3.7	2.2 - j2.8
1025	1.8 - j3.2	2.3 - j2.2
1090	1.8 - j2.7	2.4 - j1.7
1150	1.9 - j2.3	2.6 - j1.5
1215	2.0 - j1.9	2.8 - j1.3

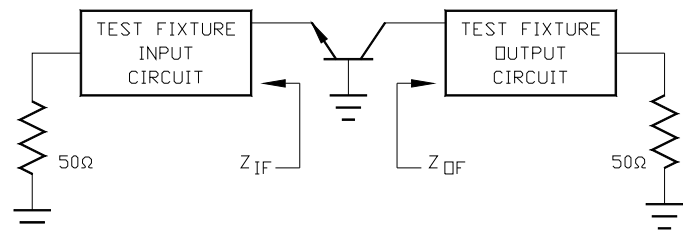


Avionics Pulsed Power Transistor
350W, 1025-1150 MHz, 10 μ s Pulse, 1% Duty

M/A-COM Products
Released, 14 Sep 2007

RF Power Transfer Curve 1090 MHz, Output Power vs. Input Power

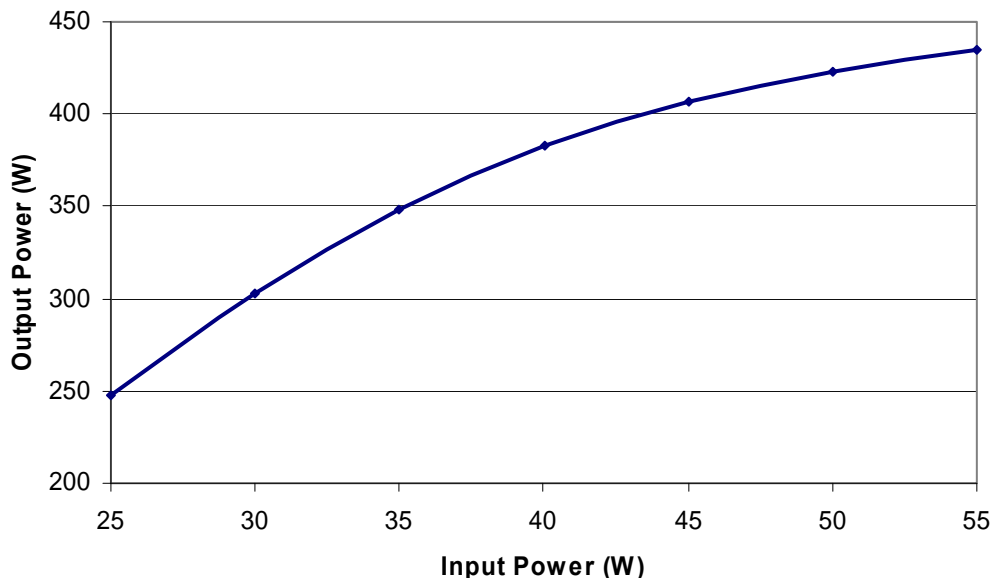


RF Power Transfer Curve 1090 MHz, Gain & Efficiency vs. Output Power

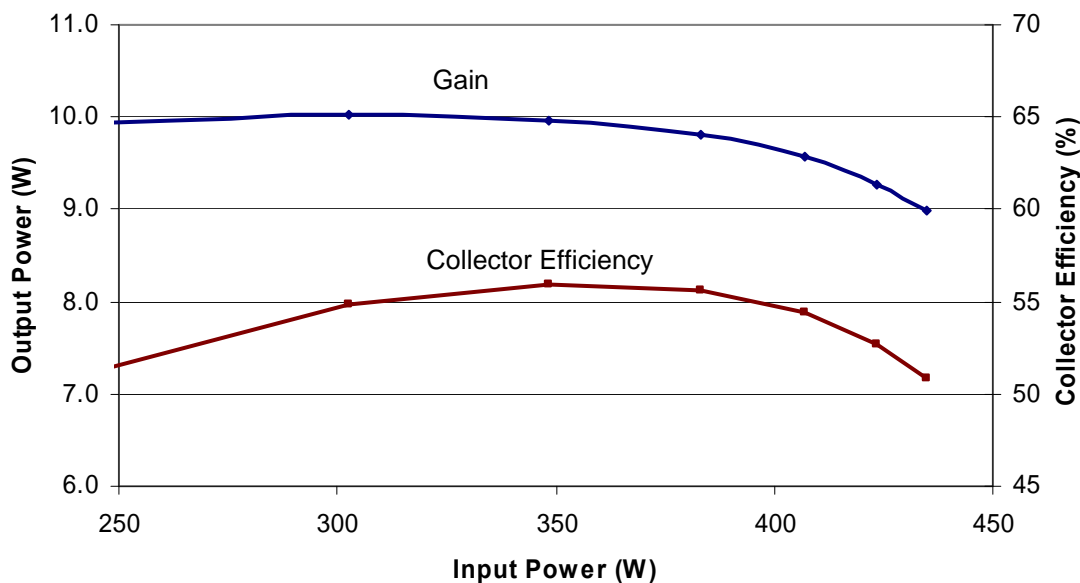


Avionics Pulsed Power Transistor
350W, 1025-1150 MHz, 10µs Pulse, 1% Duty

M/A-COM Products
Released, 14 Sep 2007

Test Fixture Circuit Dimensions

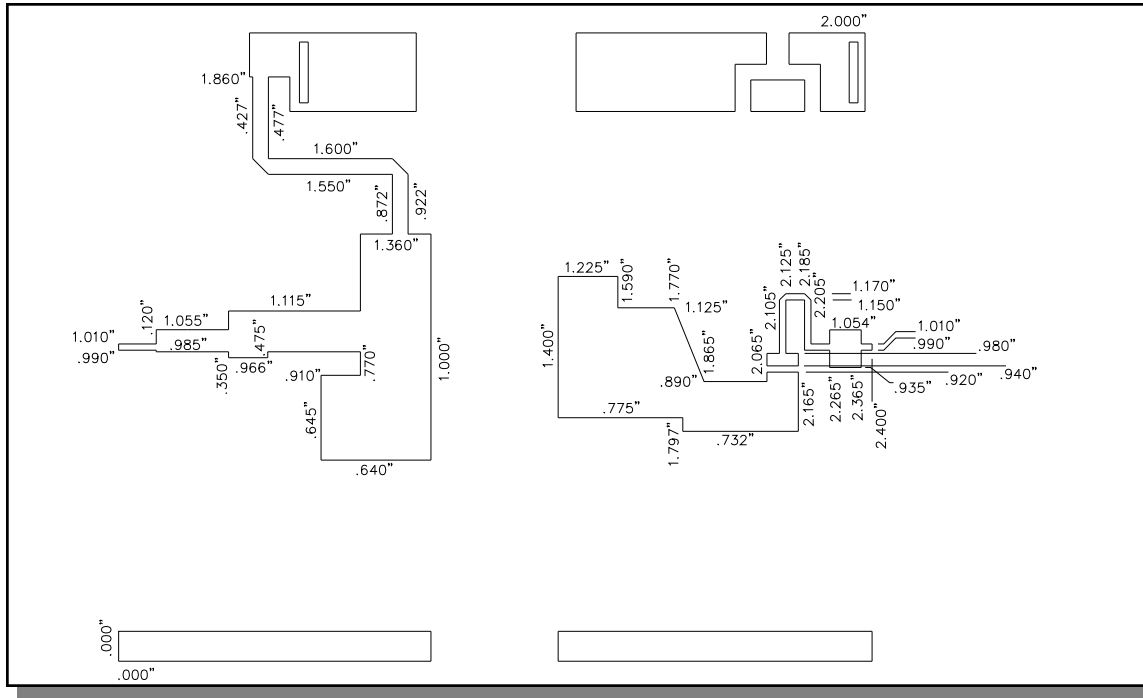

Test Fixture Assembly

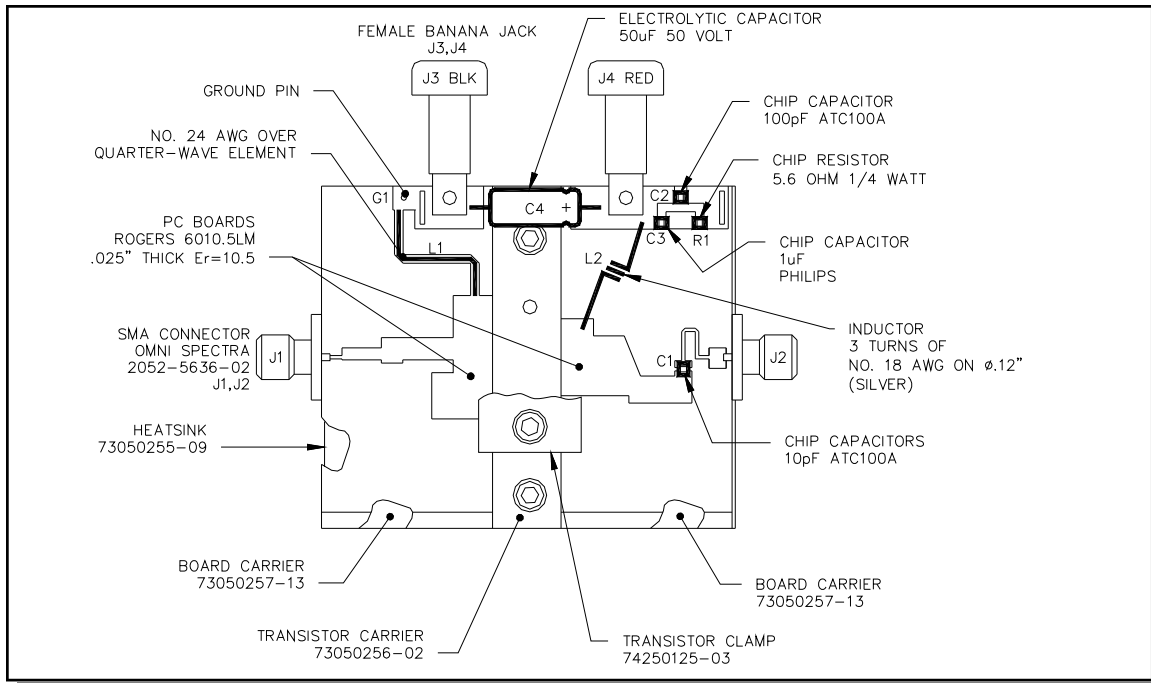

ADVANCED: Data Sheets contain information regarding a product M/A-COM Technology Solutions is considering for development. Performance is based on target specifications, simulated results, and/or prototype measurements. Commitment to develop is not guaranteed.
PRELIMINARY: Data Sheets contain information regarding a product M/A-COM Technology Solutions has under development. Performance is based on engineering tests. Specifications are typical. Mechanical outline has been fixed. Engineering samples and/or test data may be available. Commitment to produce in volume is not guaranteed.

- **North America** Tel: 800.366.2266 / Fax: 978.366.2266
- **Europe** Tel: 44.1908.574.200 / Fax: 44.1908.574.300
- **Asia/Pacific** Tel: 81.44.844.8296 / Fax: 81.44.844.8298

Visit www.macomtech.com for additional data sheets and product information.

M/A-COM Technology Solutions Inc. and its affiliates reserve the right to make changes to the product(s) or information contained herein without notice.