


SAW Bandpass Filter 203319B



1. Features

- IF Bandpass Filter
- High Attenuation
- Single-Ended Operation
- DIP Package
- Maximum Storage Temperature Range : -40°C ~ 85°C
- Electrostatics Sensitive Device (ESD)

2. Package Dimension

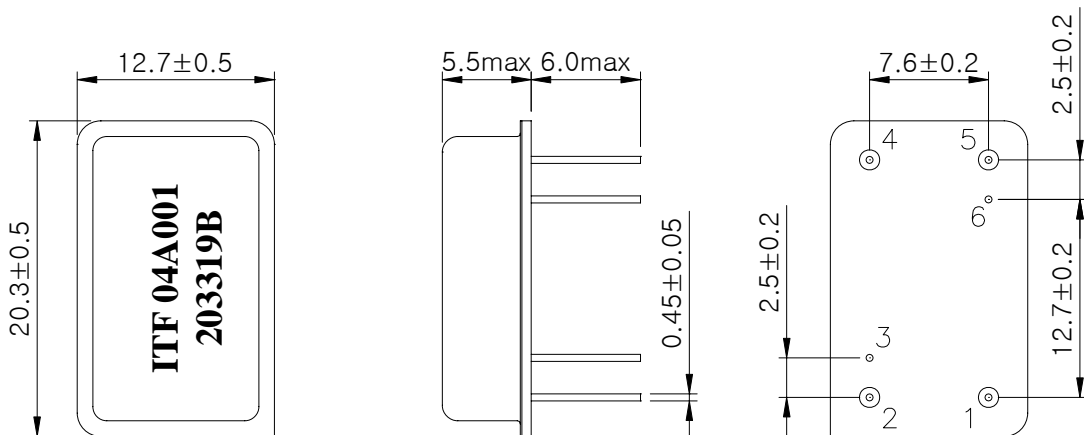

Package : D2012

Dimensions shown are nominal in millimeters
 Base : Fe(SPCC), Au plating over Ni plated
 Cap : Cu & Cr Alloy, Ni Plated
 Termination : Kovar, Au Plated

Pin Configuration	
1	Input
5	Output
2, 4	Ground
3, 6	Case ground

	ITF Co., Ltd. 102-901, Bucheon Technopark 364, Samjeong-Dong, Ojeong-Gu, Bucheon-City, Gyeonggi-Do, Korea 421-809	Part No.	203319B	
		Rev. Date	2004-04-30	
		Rev.	NI2002-CS02	1/5

SAW Bandpass Filter 203319B



3. Specifications

Fo = 75.0 MHz


Terminating source impedance : 50Ω and matching network

Terminating load impedance : 50Ω and matching network

		Minimum	Typical	Maximum
Center Frequency	MHz	-	75.0	-
Insertion Loss	dB	-	23.5	25.5
1dB Bandwidth	MHz	-	19.0	-
3dB Bandwidth	MHz	19.4	19.5	-
40dB Bandwidth	MHz	-	21.35	21.5
Amplitude Ripple (Fo +/- 9.375 MHz)	dB	-	0.8	1.0
Group Delay Variation (Fo +/- 9.375 MHz)	nsec	-	25	100
Absolute Delay	usec	-	2.03	-
Ultimate Rejection	dB	50	52	-
Temperature Coefficient of Frequency	ppm/°C	-	-72	-

Notes :

- 1) All specifications are based on the matching schematic shown below
- 2) All specifications are measured by Agilent Network analyzer and full 2 port calibration at room temperature
- 3) All attenuation measurements are measured relative to insertion loss


 Integrated Technology Future	ITF Co., Ltd. 102-901, Bucheon Technopark 364, Samjeong-Dong, Ojeong-Gu, Bucheon-City, Gyeonggi-Do, Korea 421-809	Part No.	203319B	
		Rev. Date	2004-04-30	
		Rev.	NI2002-CS02	2/5

SAW Bandpass Filter 203319B



4. Matching Schematic

(Actual matching values may vary due to PCB layout and parasitics)



$$L1 = L2 = 68 \text{ nH}$$

5. Marking Configuration

ITF¹⁾04A001²⁾
203319B³⁾



- 1) Manufacturer name
- 2) Lot Number
- 3) Part Number

	ITF Co., Ltd. 102-901, Bucheon Technopark 364, Samjeong-Dong, Ojeong-Gu, Bucheon-City, Gyeonggi-Do, Korea 421-809	Part No.	203319B	
		Rev. Date	2004-04-30	
		Rev.	NI2002-CS02	3/5

SAW Bandpass Filter 203319B



6. Typical Performance (at +25°C)

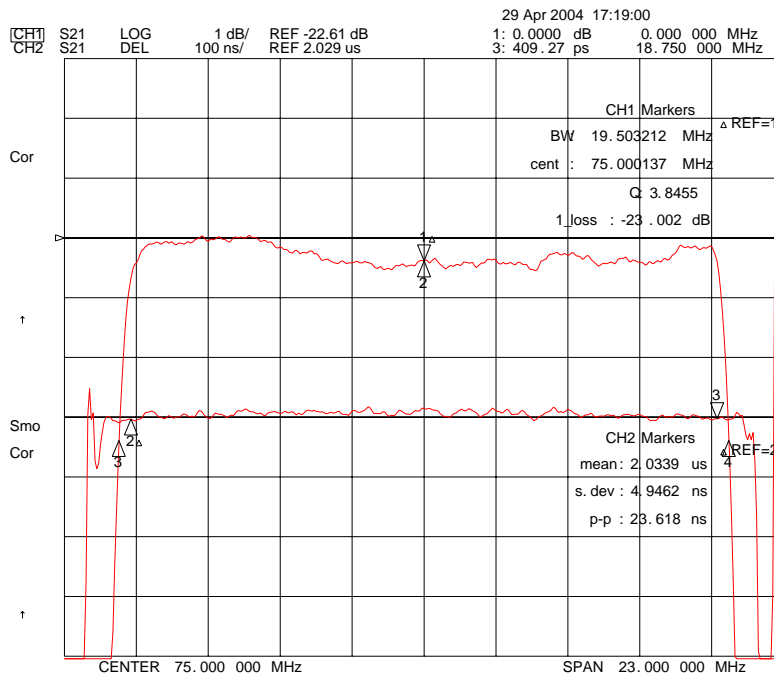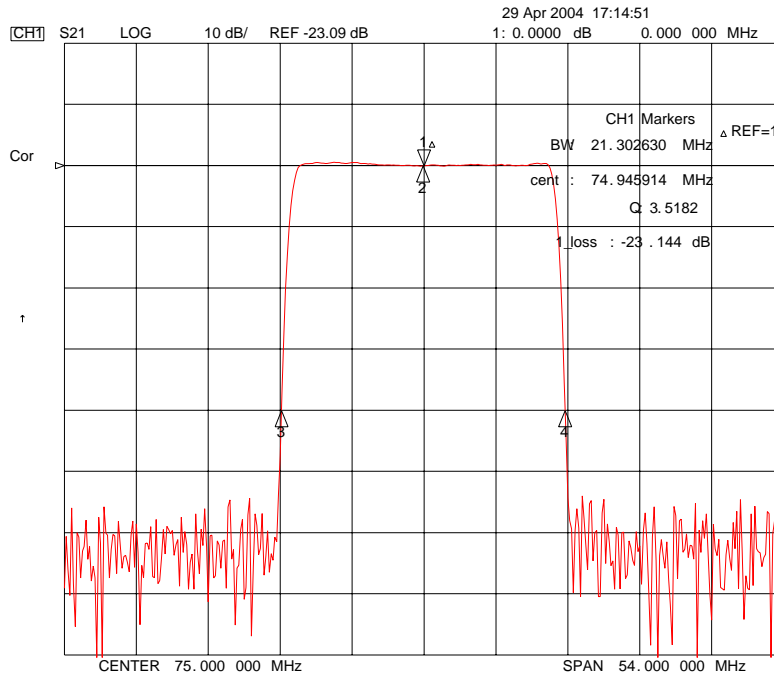





ITF Co., Ltd.
 102-901, Bucheon Technopark 364,
 Samjeong-Dong, Ojeong-Gu, Bucheon-City,
 Gyeonggi-Do, Korea 421-809

Part No. 203319B

Rev. Date 2004-04-30

Rev. NI2002-CS02 4/5

SAW Bandpass Filter 203319B

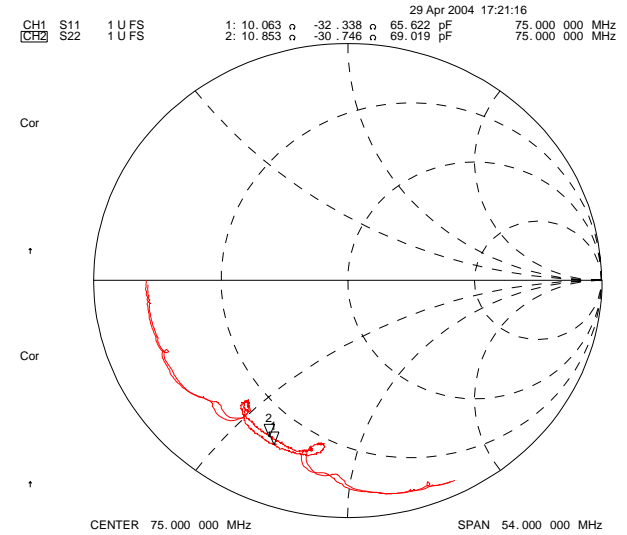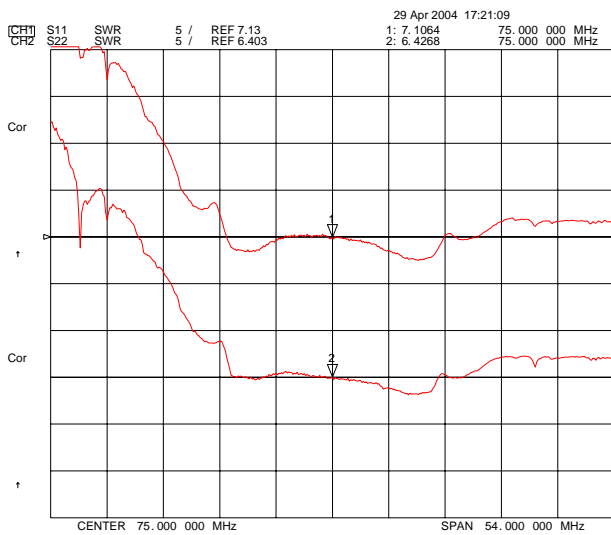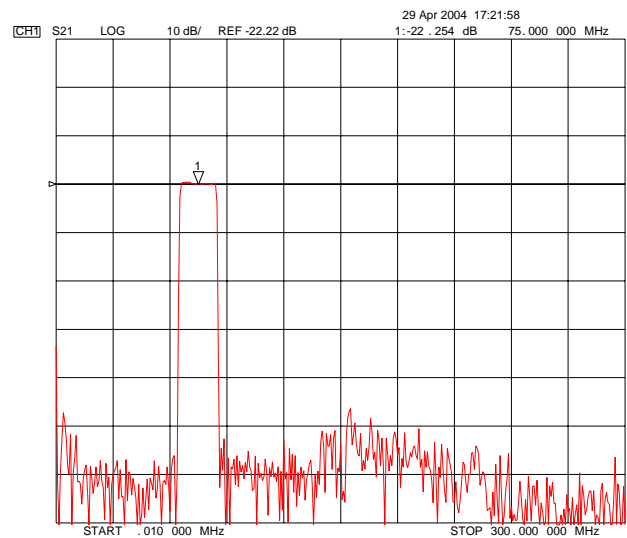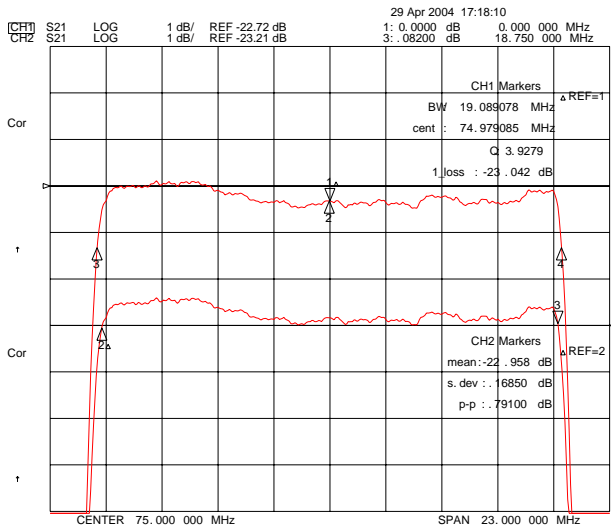

ITF Co., Ltd.
102-901, Bucheon Technopark 364,
Samjeong-Dong, Ojeong-Gu, Bucheon-City,
Gyeonggi-Do, Korea 421-809

Part No.	203319B	
Rev. Date	2004-04-30	
Rev.	NI2002-CS02	5/5