

IN5817 thru IN5819

MINIATURE SCHOTTKY BARRIER RECTIFIER



**CHENG-YI
ELECTRONIC**



FEATURES


- Low switching noise
- Low forward voltage drop
- High current capability
- High switching capability
- High reliability
- High surge capability

MECHANICAL DATA

- Case:Molded plastic
- Epoxy:UL 94V-0 rate flame retardant
- Lead:MIL-STD-202 method 208 quaranteed
- Mounting position:Any

VOLTAGE RANGE
20 TO 40 Volts
CURRENT
1.0 Amperes

DO-41

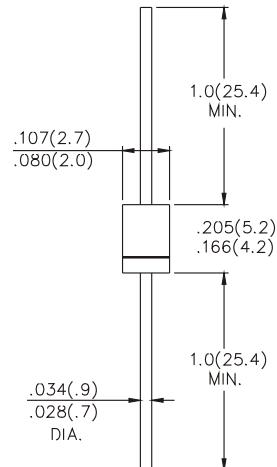

Dimensions in inches and (millimeters)

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.

Single phase, half wave, 60Hz, resistive or inductive load.

For capacitive load, derate current by 20%.

MAXIMUM RATINGS (At TA=25°C unless otherwise noted)

Ratings	Symbol	IN5817	IN5818	IN5819	UNITS
Maximum Recurrent Peak Reverse Voltage	V _{RRM}	20	30	40	Volts
Maximum RMS Voltage	V _{RMS}	14	21	28	Volts
Maximum DC Blocking Voltage	V _{DC}	20	30	40	Volts
Maximum Average Forward Rectified Current .375" (9.5mm) lead length at TL=90°C	I _O		1.0		Amps
Peak Forward Surge Current, 8.3 ms single half sine-wave superimposed on rated load (JEDEC method)TL=70°C	I _{FSM}		25		Amps
Typical Thermal Resistance (Note 1)	R _{θ JC}		80		°C / W
Typical Junction Capacitance (Note 2)	C _J		110		pF
Storage and Operating Temperature Range	T _{STG}		-65 to +125		°C

ELECTRICAL CHARACTERISTICS (At TA=25°C unless otherwise noted)

Characteristics	Symbol	IN5817	IN5818	IN5819	UNITS
Maximum Instantaneous Forward Voltage at 1.0A DC	V _F	.45	.55	.60	Volts
Maximum Forward Voltage at 3.1A DC	V _F	.75	.875	.90	Volts
Maximum Average Reverse Current @T _A =25°C at Rated DC Blocking Voltage	I _R		1.0		mAmps
@T _c =100°C			1.0		mAmps

Notes : 1. Thermal Resistance (Junction to Ambient) : Vertical PC Board Mounting, 0.5" (12.7mm) Lead Length

2. Measured at 1 MHz and applied reverse voltage of 4.0 volts.

IN5817 thru IN5819

MINIATURE SCHOTTKY BARRIER
RECTIFIER



CHENG-YI
ELECTRONIC

RATING AND CHARACTERISTICS CURVES
IN5817 THRU IN5819

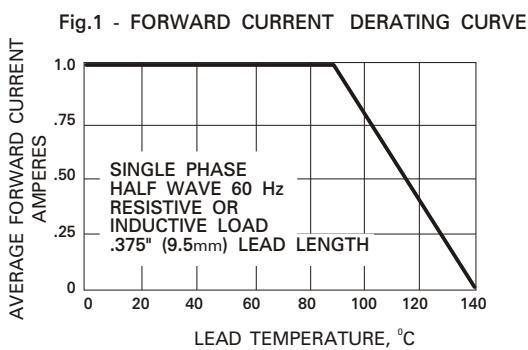


Fig.2 - TYPICAL FORWARD CHARACTERISTICS

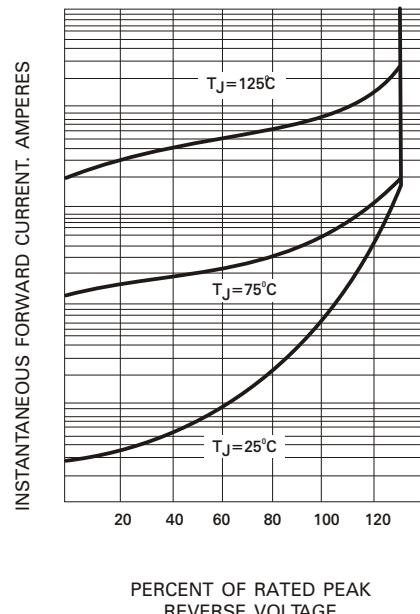


Fig.3 - TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

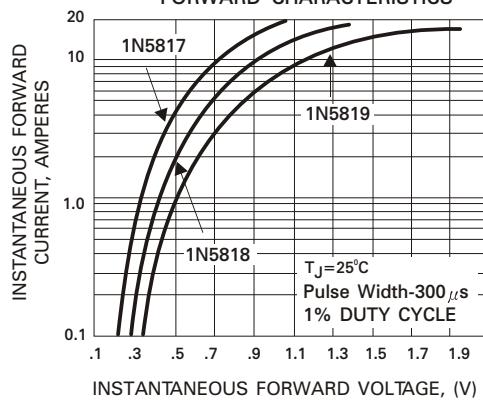


Fig.4 - MAXIMUM NON-REPETITIVE SURGE CURRENT

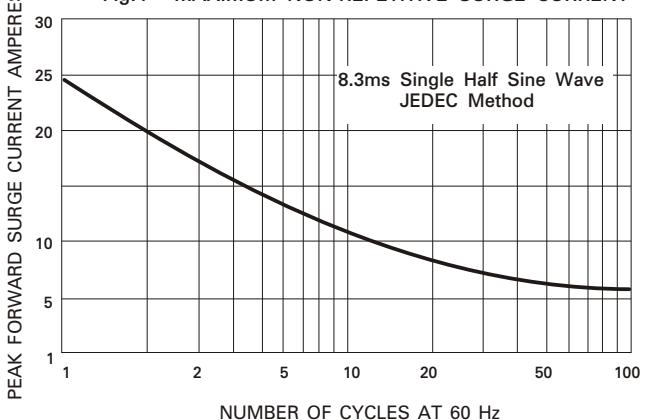


Fig.5 - TYPICAL JUNCTION CAPACITANCE

