



# PC-TFT-2535PA-LED

## Interface Board

### Features

- Used for TFT-LCD display: 2.5"/3.5" AND-TFT-25PA
- Compact, light, thin and small
- Short circuit protection
- Low EMI interference
- External pin to allow user to adjust color, brightness and contrast.

The PC-TFT-2535PA-LED is designed to work with the AND-TFT-25PA and the AND-TFT-35PA color TFT display which is suitable for security, video game, door phone, video phone, portable TV and instrument display applications..

### Mechanical Characteristics

Item	Specification	Unit
Outline Dimension	62.5 (W) x 52 (H) x 7.5 (D)	mm
Weight	20	g

### Absolute Maximum Rating

Item	Symbol	Conditions	Min.	Max.	Unit
Operating Temperature	Top	–	0	60	°C
Storage Temperature	Tstg	–	-30	80	°C

### DC to DC Converter

Voltage (V)	Current (mA)	Total Regulation			Ripple & Noise (mV)
		Min.	Typ.	Max.	
+5V	50-100	4.8	5.0	5.1	50
+7.5V	6~10	7	9.1	9.5	200
+15V	5~5	12	15	16	200
-12V	2-5	-9	-12	-15	200

#### Input

##### Characteristics:

**Typical Input Voltage:** 8V DC

**Input Voltage Range:** 6VDC to 15 VDC

**Input Current:** 150mA, Typical at 12VDC with panel load.

**Inrush Current Max:** 250mA at 6VDC, 130mA at 15VDC Cold start at 25C, 5.0VDC with panel load.

**Sync. Pulse:** 60KHz Typical

Product specifications contained herein may be changed without prior notice.

It is therefore advisable to contact Purdy Electronics before proceeding with the design of equipment incorporating this product.



**Terminal Pin Assignment**

Pin No.	Symbol	I/O	Description	Remarks
1	+5V	O	5.0V output	-
2	COL	I	color adj.	-
3	BRT	I	brightness adj.	-
4	CNT	I	contrast adj.	-
5	Video	I	composite video signal	The signal resistance is 75Ω, 1V p-p.
6	U/P	I	up/down scan control	+5V or GND
7	R/L	I	left/right scan control	+5V or GND
8	GND	I	ground	-
9	GND	I	ground	-
10	+12V	I	+12V DC power input	-
11	HSY	O	HSY output	-
12	VSY	O	VSY output	-

**Connector:**

**Pin No:** FC12D (Bottom Contact)

**Pitch:** FC 1.0mm

**Output Characteristics:**


**DC to DC Backlight Inverter:**

**Starting Voltage:** 15.8VDC, typical at 6.0 VDC

**Working Voltage:** 16.0 VDC, typical at 15 VDC


**Working Current:** DC 10mA ± 20% typical for general application.

**Block Diagram**

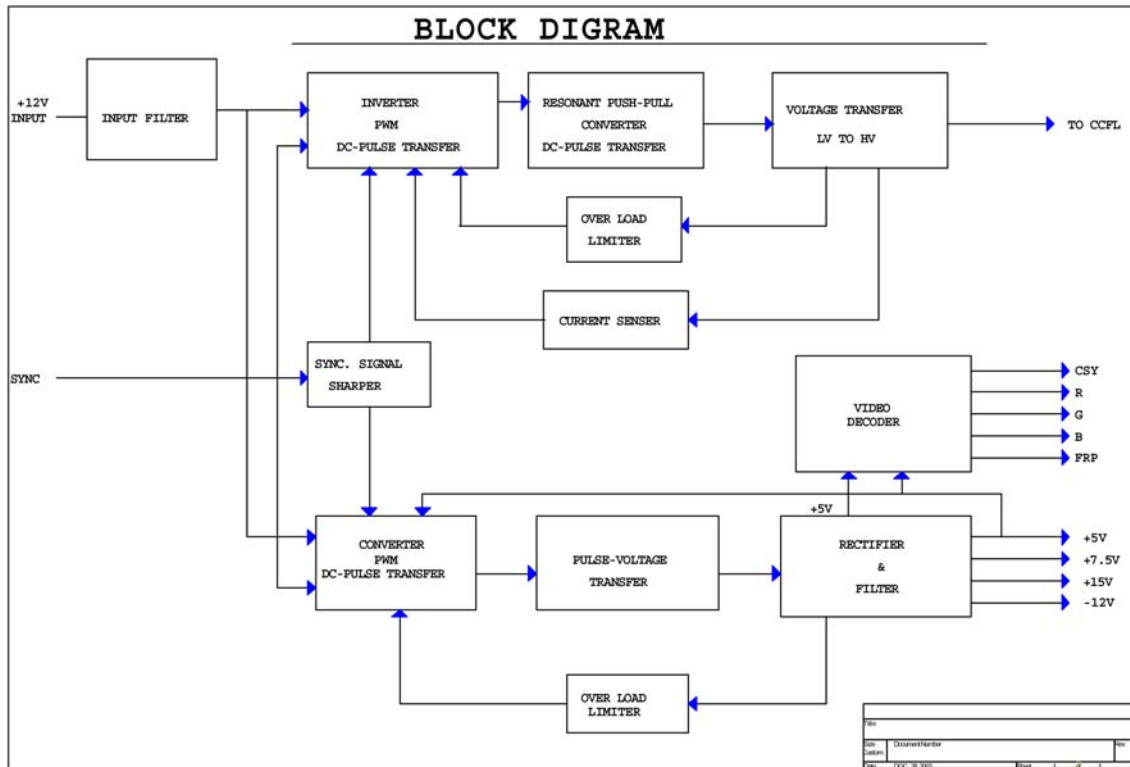




Dimensional Outline

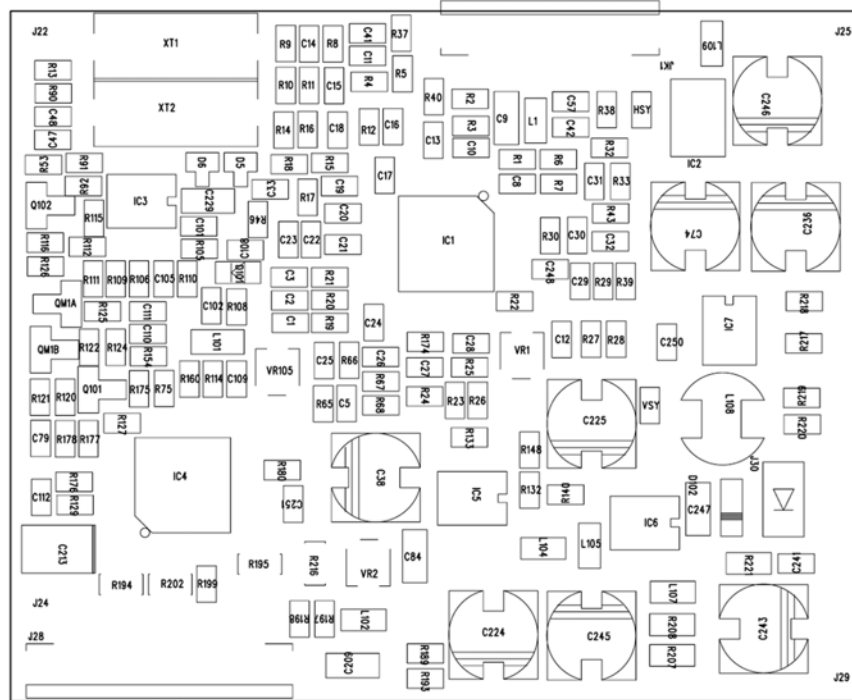

PIN 1 CON1 PIN 12

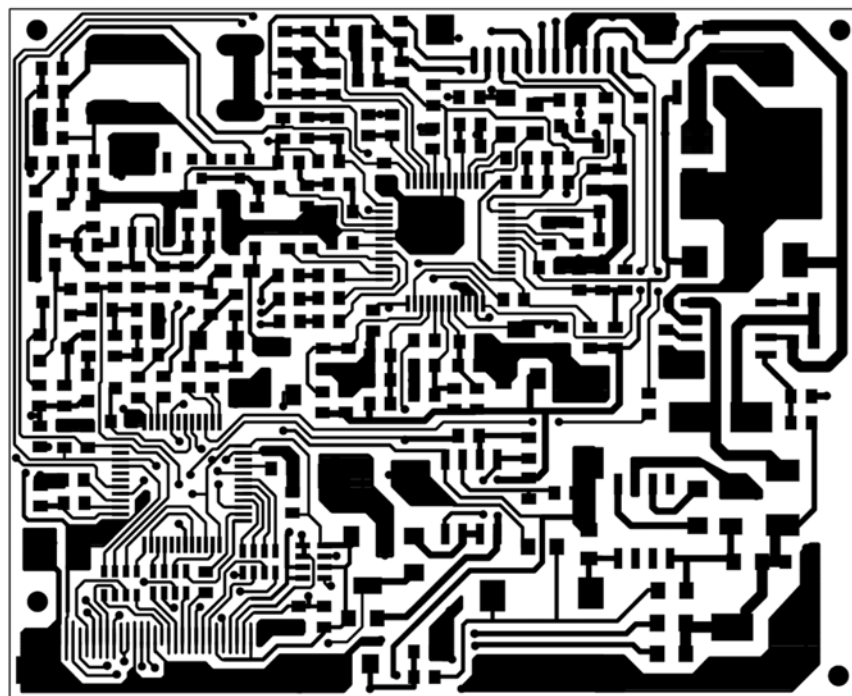

PIN 1 CON2 PIN 30 2003.11.15



Dimensional Outline

