


TERMINAL BLOCKS

- Low profile
- 2-12 Pole interlocking
- UL94V-0 Flame retardant material
- Test probe facility
- 1.5mm² wire acceptance
- Screw terminal
- UL/CE approved

5mm PITCH 90° MOUNT - LOW PROFILE

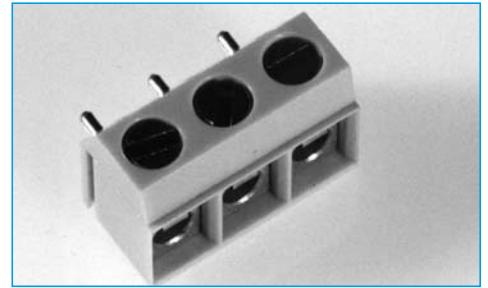


SPECIFICATION

Rating: 16A/150V
Dielectric Strength: >2KV
Insulation Resistance: >5MΩ
Working temperature: -20°C to 125°C
Short Period: 160°
Moulding: UL94V-0 flame retardant Lexan

Pin/terminal: 5 micron tinned nickel plated brass
Wire Protect: Tin plated phosphor bronze
Screw/torque: M2.5 steel/0.4Nm 7 micron zinc colour passivated and tropicalised
Recommended PCB hole size: ø1.1mm

OUTLINE DRAWING

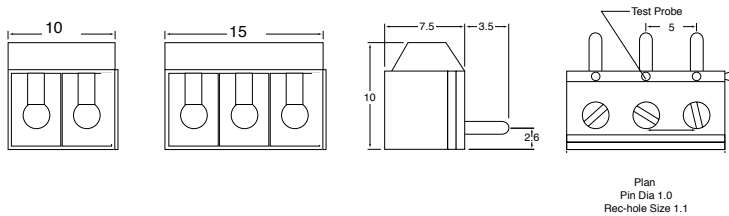


ORDERING INFORMATION

DBC	TB	4	/2
Dubilier Connectors	Series Terminal Block	Style	N° of Ways 2 = 2 ways 3 = 3 ways
* Other Number of ways are available up to 12 Please consult office for further details			

TERMINAL BLOCKS

- 45° Mounting 5mm pitch
- 2-12 Pole interlocking
- Professional series rising clamp - Designed to prevent cable entry below clamp
- 4mm² wire acceptance
- Captive screws
- To VDE 0110
- UL/VDE/CE approved

5mm 45° MOUNT - RISING CLAMP

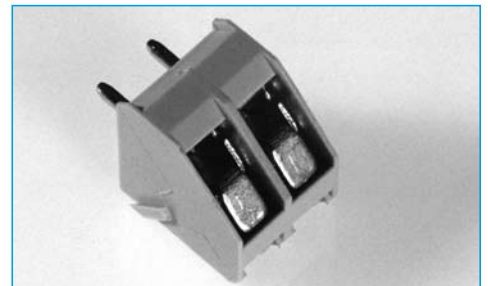


SPECIFICATION

Rating: 17.5A/250V
Dielectric Strength: >1.25KV
Insulation Resistance: >5MΩ
Working temperature: -20°C to 125°C
Short Period: 160°
Moulding: UL94V-0 flame retardant nylon 66

Pin/terminal: 5 micron tinned nickel plated brass
Rising clamp: Zinc plated steel
Screw/torque: M2.5 steel/0.4Nm 7 micron zinc colour passivated and tropicalised
Recommended PCB hole size: ø1.3mm

OUTLINE DRAWING

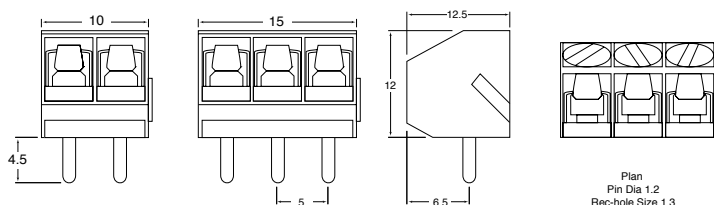

ORDERING INFORMATION

DBC	TB	5	/2
Dubilier Connectors	Series Terminal Block	Style 5=Grey 5A=Black	N° of Ways 2 = 2 ways 3 = 3 ways
* Other Number of ways are available up to 12 Please consult office for further details			

SECTION 18