


FEATURES

- 85°C, 1000 hours assured, 5mm height with low leakage.
- Use in very compact high temperature industrial equipment.

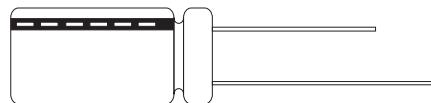


SPECIFICATIONS

Item	Performance																				
Operating Temperature Range	-40° ~ + 85°C																				
Capacitance Tolerance	± 20% (120Hz, 20°C)																				
Leakage Current (at 20°C)	I = 0.002CV or 0.4 (μ A) whichever is greater (after 2 minutes) Where, C = rated capacitance in μ F. V=rated DC working voltage in V.																				
Dissipation Factor Tan δ at 120 Hz, 20°C	Rated Voltage	4	6.3	10	16	25	35	50													
	Tan δ (max)	0.35	0.27	0.23	0.19	0.15	0.13	0.11													
Low Temperature Characteristics (at 120Hz)	Rated Voltage			4	6.3	10	16	25	35	50											
	Impedance Ratio	Z(-25°C) / Z(+20°C)		6	3	2	2	2	2	2											
		Z(-40°C) / Z(+20°C)		12	9	7	5	3	3	3											
Load Life Test	Test Time	1000 Hrs						The specification shall be satisfied when the capacitors are restored to 20°C after rated voltage applied for 1000hrs at 85°C.													
	Capacitance Change	4 ~ 6.3V	$\leq \pm 30\%$																		
		10 ~ 50V	$\leq \pm 25\%$																		
	Dissipation Factor	Less than 200% of specific value																			
Shelf Life Test	Leakage Current	Within specified values						The specification shall be satisfied when the capacitors are restored to 20°C after exposing them for 500 hrs at 85°C without voltage applied.													
	Test Time	500 Hrs																			
	Capacitance Change	4 ~ 6.3V	$\leq \pm 30\%$																		
		10 ~ 50V	$\leq \pm 25\%$																		
Standards	Dissipation Factor	Less than 200% of specific value																			
	Leakage Current	Within specified values																			
	Satisfies Characteristic W of JIS C 5141																				

LEAD SPACING AND DIAMETER

ϕ D	4	5	6.3
P	1.5	2.0	2.5
ϕ d	0.45		
α	1.0		
β	0.5		

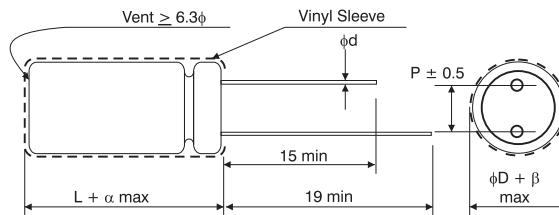

DIMENSIONS & PERMISSABLE RIPPLE CURRENT

F Code	VDC	4V (0G)		6.3V (0J)		10V (1A)		16V (1C)		25V (1E)		35V (1V)		50V (1H)	
		D	L	mA	D	L	mA	D	L	mA	D	L	mA	D	L
0.10	0R1													4 x 5	1
0.22	R22													4 x 5	2
0.33	R33													4 x 5	3
0.47	R47													4 x 5	3.8
1	010													4 x 5	6.9
2.2	2R2													4 x 5	10
3.3	3R3													4 x 5	13
4.7	4R7													4 x 5	19
10	100													4 x 5	14
22	220													5 x 5	23
33	330	4 x 5	22	5 x 5	24	5 x 5	28	6.3 x 5	38	6.3 x 5	42			5 x 5	24
47	470	5 x 5	32	5 x 5	34	6.3 x 5	43	6.3 x 5	46					5 x 5	32
100	101	6.3 x 5	54	6.3 x 5	60										

PART NUMBER EXAMPLE

SSL 0R1 M 1H SA 040 050