


## ASMA203 26dBm, 50 Ohm Amplifier 1-300MHz

---

### Introduction

The ASMA203 is a 50 Ohm hybrid amplifier module designed for broadband operation as a class A amplifier driver in applications from 1 to 300MHz. Its wide dynamic range, flexibility and low cost make it ideal for a broad spectrum of instrumentation, receiver, and transmitter applications. The ASMA203 is packaged in a high dissipation, ceramic SO08 style package for surface mount assembly.



Ceramic SOIC8

Figure 1. Available Packages

### Features

- Gold Metalized Die
- Broad band Operation 1-300MHz
- 12.5V-13.5V Operating Voltage
- >13dB Gain @ 300MHz

\* Stresses in excess of the absolute maximum ratings can cause permanent damage to the device. These are absolute stress ratings only. Functional operation of the device is not implied at these or any other conditions in excess of those given in the operational sections of the data sheet. Exposure to absolute maximum ratings for extended periods can adversely affect device reliability.

Maximum Ratings		$T_C = 25^\circ\text{C}$
SYMBOL	RATING	UNITS
$I_D$	325	mA
$P_{IN}$	+27	dBm
$T_J$	+175	$^\circ\text{C}$
$T_{SOLDER}$	+260 $^\circ\text{C}$ for 30 Seconds	$^\circ\text{C}$
$T_{STG}$	-65 to +150	$^\circ\text{C}$

ASMA203  
26dBm, 50 Ohm Amplifier 1-300MHz

---


Electrical Specifications

$I_D = 250 \text{ mA}$

SYMBOL	CHARACTERISTICS	$T_C = 25^\circ\text{C}$ TYPICAL	$T_C = 0 \text{ to } 50^\circ\text{C}$		UNITS
			MINIMUM	MAXIMUM	
BW	Frequency Range	---	1	300	MHz
$G_P$	Small Signal Power Gain	13.0	12.0		dB
$\Delta G_P$	Gain Flatness	$\pm 0.2$		$\pm 0.5$	dB
NF	Noise Figure (100 MHz)	6.0			dB
$P_{1dB}$	Power Output at 1 dB Compression	+27	+26.0		dBm
VSWR	Input/	2.0:1		2.5:1	---
	Output	2.2:1		2.5:1	
REV ISO.	Reverse Isolation	19	---	---	dB
$I_{P2}$	Two Tone 2 <sup>nd</sup> Order Intercept Point	+53	---	---	dBm
$I_{P3}$	Two Tone 3 <sup>rd</sup> Order Intercept Point	+41	---	---	dBm
$H_{P2}$	Single Tone 2 <sup>nd</sup> Harmonic Intercept Point	+59	---	---	dBm
$V_D$	Device Voltage	12.5	11.5	13.5	V

ASMA203  
26dBm, 50 Ohm Amplifier 1-300MHz

**OUTLINE DRAWING**

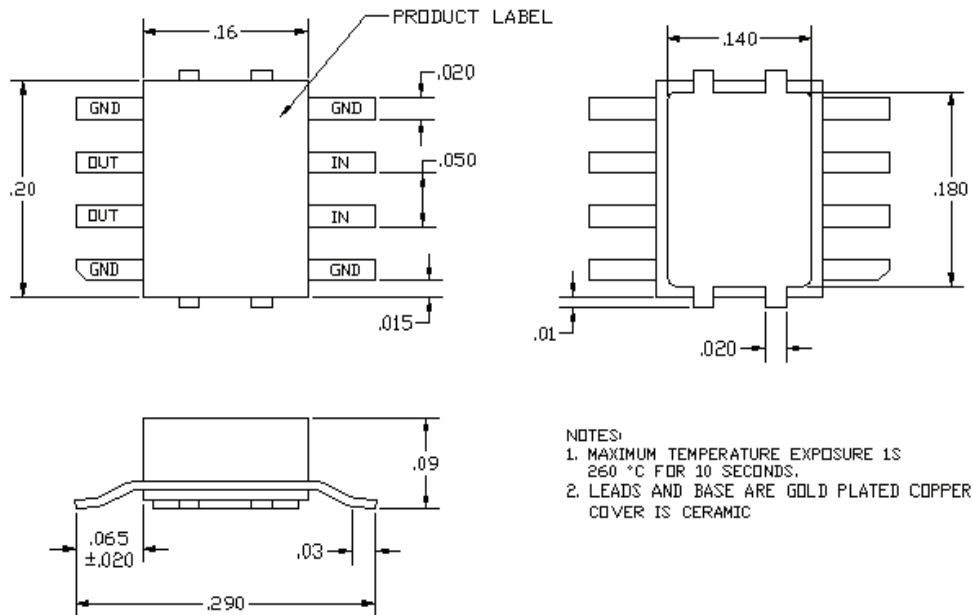

- NOTES:
1. MAXIMUM TEMPERATURE EXPOSURE IS 260 °C FOR 10 SECONDS.
  2. LEADS AND BASE ARE GOLD PLATED COPPER COVER IS CERAMIC