

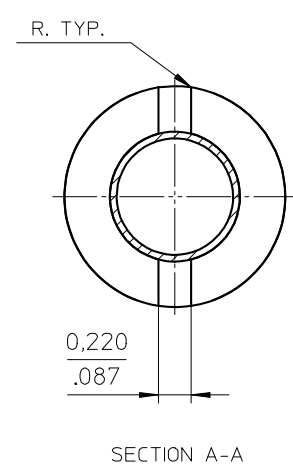


Grid pattern

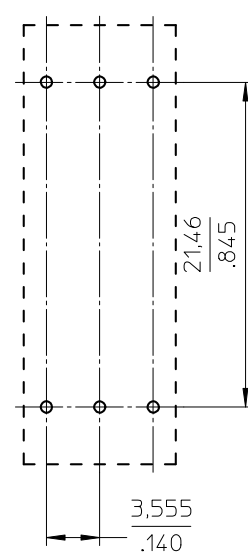

Coil former material: Zytel 70G33L (PA), glass-reinforced.  
 UL file number: E41938 - UL94HB.  
 max. operating temp: 130°C, class B  
 pin material: CuSn, Sn plated.  
 solderability: acc. to IEC 60 068-2-20 part2, Test Ta method 1, 235°C-2sec.  
 mean length of turn: 1.5 inch (38. mm)  
 winding area: 0.008 sq. inch. (5.16 mm<sup>2</sup>) per sect.

Dimensions [  $\frac{\text{mm}}{\text{inch}}$  ]

CLASSNO.		CPV-P18/11-3S-6PD-Z		4335 060 26471		06-01-27 07-12-19	
NAME NAAM	Wojtasz	SUPERS. VERV.		SFISH BL BL	112 - 001	A3	
MPA	CHECK CONTR.	DAT.	06-01-27	Property of Eigenaam van	© FERROXCUBE 2000		