

- 16, 24, 32 and 48 Contacts
- 3 Rows
- Class 2 and 3
- 2.54mm(0.1"), 5.08mm(0.2" Half loaded) Pitch
- High Reliability
- UL Approved



SPECIFICATION

Material

Insulator: Glass filled polyester (PBT, UL flammability 94V-0)
Contacts: Female copper alloy, male brass
Contact finish: Contact area: Gold over nickel (per requirements of performance class 3, class 2)
Termination area: Tin - plated or Gold-plated for long wrap post

Mechanical



Insertion force: 48 contacts max. 45N
32 contacts max. 30N
24 contacts max. 25N
16 contacts max. 15N
Withdrawal force per contact: min 0.15N

Temperature range: -55°C to +125°C
Air and creepage distance 1.2mm min.

Electrical

Current rating: 20°C 2A
70°C 1A
100°C 0.5A
Contact resistance: ≤20mΩ (testing current 100mA)
≤40mΩ after 400 mating cycles
Capacitance between adjacent contacts: Appr. 2pF
Insulation resistance: ≥10¹²Ω (between adjacent contacts at 100 VDC)
Test voltage: 1,000Vrms between contacts (2.54mm spacing)
1,550Vrms between contacts (5.08mm spacing)
1,550Vrms between contacts and body
Operating voltage: 250V AC
Agency approval:
U/L Electric rating: 250V, 2A
Mating Cycles: Class 2 = 400 Class 3 = 50

OUTLINE DRAWING

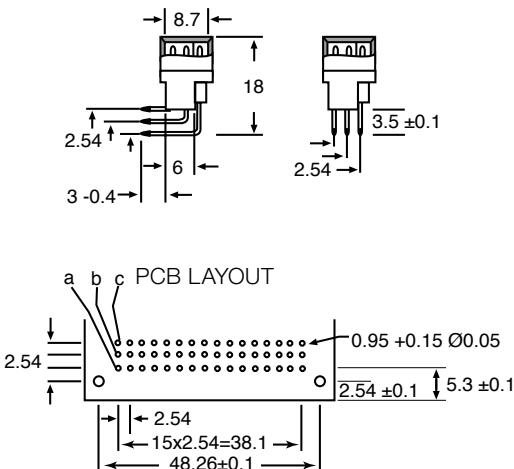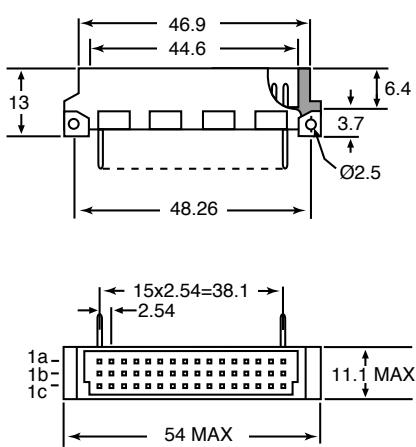

a + b + c	1 2 3 4 [c] [b] [a]
a + c	1 2 3 4 [c] [b] ++ [a]
a + b	1 2 3 4 [c] ++ [b] [a]
a	1 2 3 4 [c] +++ [b] [a]
a + b + c All even no.	1 2 3 4 [c] ++ [b] [a]
a + c All even no.	1 2 3 4 [c] + [b] + [a]

ORDERING INFORMATION

DBC	DIN	M	16	HC	A	S	3
Dubilier Connectors	Series	Connector Type	Nº of Ways	Housing Style	Position of Contacts	Termination Style	Quality Class

DIN 41612 M = Male
16 = 16 ways
24 = 24 ways
32 = 32 ways
48 = 48 ways
HC = Half C
A, AB, AC, ABC,
ABC1 = A+B+C
even nº.
AC1=AC even nº.

S = Straight Solder
RA = Right Angled Solder

3 = class 3
2 = class 2