




PIN HEADERS

DUAL ROW SMT STRAIGHT 1.27mm

- Industry Compatible
- Competitively priced
- Various plated contacts available
- 1.27mm pitch
- Various pin lengths available

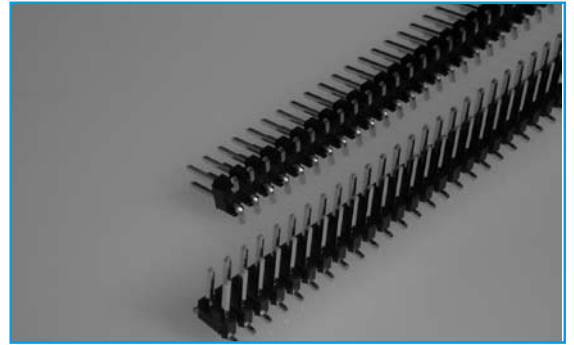


SECTION 8

SPECIFICATION


Material & Finish

Contact Material:	Brass
Insulator Material:	PBT & Glass-Fibre Reinforced UL94V-0
Current Rating:	1 A DC
Contact Resistance:	30M Ω Max at 6V DC 0.3A
Insulator Resistance:	1000M Ω Min at 500V DC
Dielectric Withstanding	
Voltage:	500V AC for One Minute
Operating Temperature:	-40°C to + 105°C

OUTLINE DRAWING

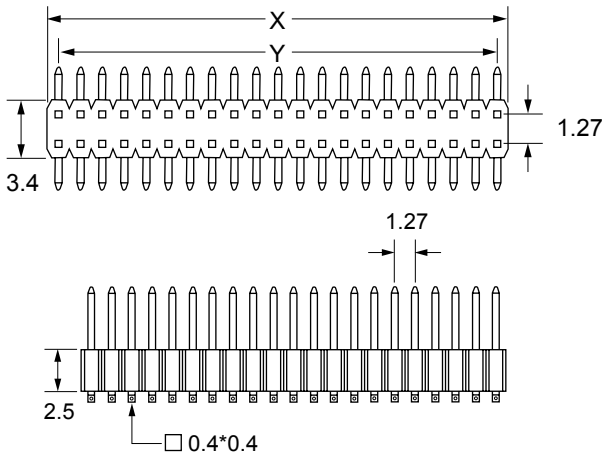

x	1.27 * Position No.
y	1.27 * (Position No.-1)

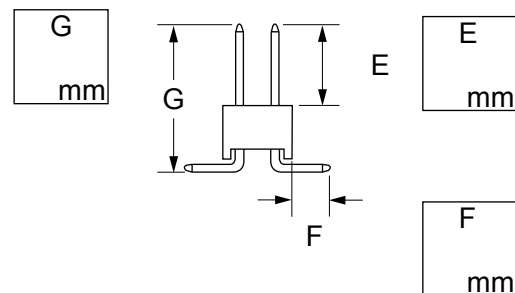

ORDERING INFORMATION

DBC	PH	C47	32	A	G	1	-XXX
Dubilier Connectors	Pin Header Connector	Series	No. of Ways 02= 2 Ways Thro to 40= 40 Ways	Contact Material A= Brass	Contact Plating G= Gold Flash T= Tin Plated S= Selective	Colour 1= Black	Unique Special Code *See below

*Dubilier will allocate a special code to distinguish the pins lengths E,F and G