

# GS1A thru GS1M SERIES

## SURFACE MOUNT RECTIFIER



**CHENG-YI  
ELECTRONIC**



### FEATURES


- For surface mounted applications
- Low profile package
- Built-in strain relief
- Easy pick and place
- Plastic package has Underwrites Laboratory Flammability Classification 94V-O
- Glasspassivated chip junction
- high temperature soldering:260°C/10seconds at terminals

### MECHANICAL DATA

- Case:JEDEC Do-201AD molded plastic
- Terminals:plated axial leads, solderable per MIL-STD-750, Method 2026
- Polarity:Indicated by cathode band
- Standard Packaging: 12mm tape (EIA STD EIA-481)
- Weight:0.002 ounce, 0.064 gram

VOLTAGE RANGE 50 TO 1000 Volts  
CURRENT 1.0 Amperes

### SMA/DO-214AC

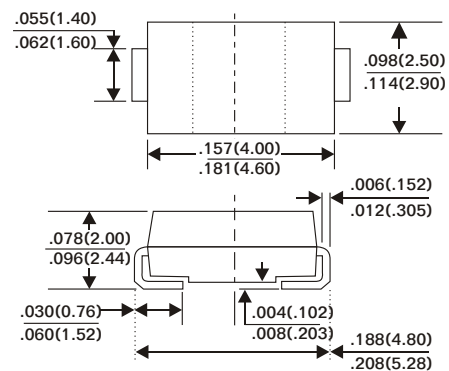

Dimensions in inches and (millimeters)

### MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.  
Single phase, half wave, 60Hz, resistive or inductive load.  
For capacitive load, derate current by 20%.

RATINGS	SYMBOL	GS1A	GS1B	GS1D	GS1G	GS1J	GS1K	GS1M	UNITS
Maximum Recurrent Peak Reverse Voltage	$V_{RRM}$	50	100	200	400	600	800	1000	Volts
Maximum RMS Voltage	$V_{RMS}$	35	70	140	280	420	560	700	Volts
Maximum DC Blocking Voltage	$V_{DC}$	50	100	200	400	600	800	1000	Volts
Maximum Average Forward Rectified Current, at $\bar{t} = 100^\circ\text{C}$	$I_{(AV)}$	1.0							Amps
Peak Forward Surge Current 8.3 ms single half sine-wave superimposed on rated load (JEDEC method)	$I_{FSM}$	30.0							Amps
Maximum Instantaneous Forward Voltage at 1.0A	$V_F$	1.10							Volts
Maximum DC Reverse Current at Rated DC Blocking Voltage @ $T_A=25^\circ\text{C}$ @ $T_A=125^\circ\text{C}$	$I_R$	5.0 50							$\mu\text{A}$
Maximum Reverse Recovery Time (Note 1)	$T_{RR}$	2.5							$\mu\text{S}$
Typical Junction Capacitance (Note 2)	$C_J$	12.0							pF
Maximum Thermal Resistance (Note 3)	$R_{\theta JL}$	30.0							$^\circ\text{C} / \text{W}$
Operating and Storage Temperature Range	$T_J$ $T_{STG}$	-50 to +150							$^\circ\text{C}$

- Notes : 1. Reverse Recovery Test Conditions:  $I_F=0.5\text{A}$ ,  $I_R=1.0\text{A}$ ,  $I_{rr}=0.25\text{A}$   
2. Measured at 1 MHz and Applied  $V_r=4.0$  volts  
3. 8.0mm<sup>2</sup>(0.13mm thick) land areas

# GS1A thru GS1M SERIES

## SURFACE MOUNT RECTIFIER



**CHENG-YI  
ELECTRONIC**

### RATING AND CHARACTERISTICS CURVES GS1A THRU GS1M

Fig. 1 - FORWARD CURRENT DERATING CURVE

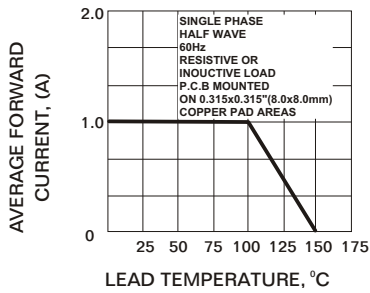


Fig. 2 - MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

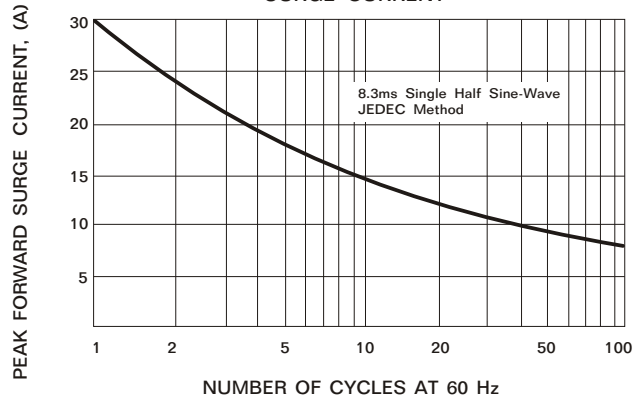


Fig. 3 - TYPICAL REVERSE CHARACTERISTICS

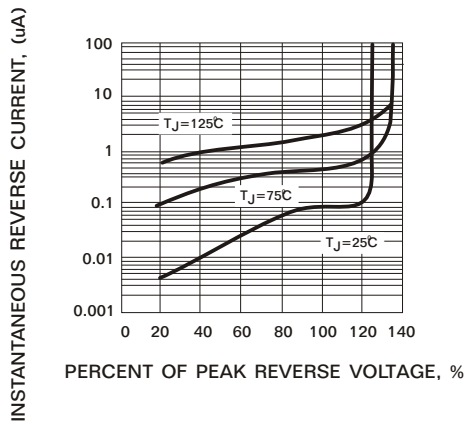


Fig. 4 - TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

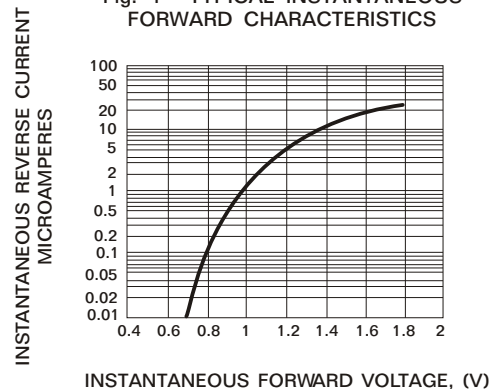


Fig. 5 - TRANSIENT THERMAL IMPEDANCE

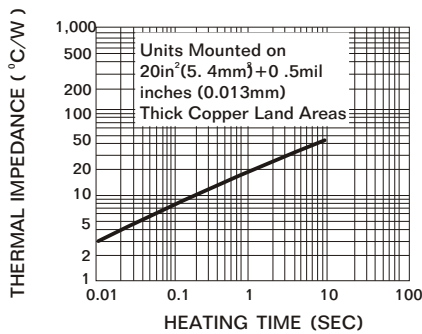


Fig. 6 - TYPICAL JUNCTION CAPACITANCE

