



1. Dimensions:

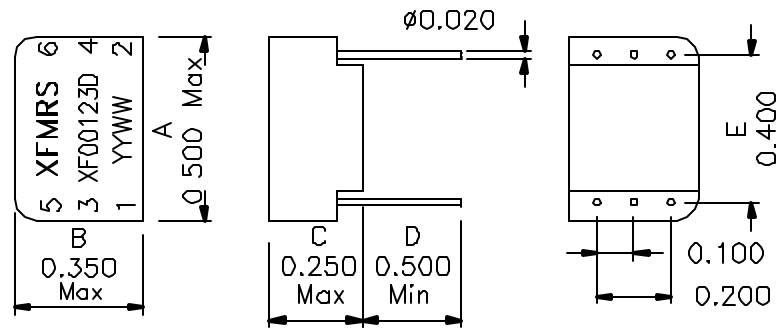

2. Schematic:

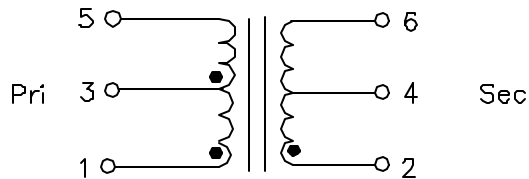

3. Electrical Specifications: @25°C

Isolation Voltage: 1500Vrms (PRI/SEC)

Turns Ratio: 1CT:2CT $\pm 5\%$ (PRI:SEC)

PRI OCL: 1.2mH Minimum @100KHz 50mV

PRI LL: 0.50uH Maximum @100KHz 50mV (SEC Shorted)

Cw/w: 35pF Maximum @100KHz 50mV (PRI/SEC)

PRI DCR: 0.70 Ohms Maximum

SEC DCR: 1.50 Ohms Maximum

Notes:

1. Solderability: Leads shall meet MIL-STD-202, Method 208D for solderability.
2. Flammability: UL94V-0
3. ASTM oxygen index: > 28%
4. Insulation System: Class F 155°C, UL file E151556
5. Operating Temperature Range, -40°C to +85°C

DOC. REV A/1

XFMRs Inc <small>UNLESS OTHERWISE SPECIFIED TOLERANCES: .xxx ± 0.010 Dimensions in Inch</small>	Title: TRANSFORMERS	
	P/N: XF00123D	REV. A
	DWN. 廖玉坤	Jan-22-02
	CHK. 李清儿	Jan-22-02
SCALE 2:1 SHT 1 OF 1	APP. BW	Jan-22-02