

Bulk Metal® Foil Technology Conformally Coated Precision Current Sensing Resistors with TCR of 5 ppm/°C and values down to 5 mΩ



Any value available within resistance range

The VCS200 Series offers resistance values as low as 5 mΩ and TCR's as low as 5 ppm/°C with excellent long term stability. The resistors are conformally coated. The 4 terminal current sensing resistors can sustain 2 W continuously without an appreciable change in resistance (0.5 % maximum). The typical 50 % derating of the power specification associated with other technologies is not necessary.

Our Application Engineering Department is available to advise and to make recommendations. For non-standard technical requirements and special applications, please contact us.

FEATURES

- Temperature Coefficient of Resistance (TCR): ± 5 ppm/°C (0 to 60 °C) (see table 1)
- Tolerance: to ± 0.02 % (see table 1)
- Power Rating: 2 W at 25 °C
- Load Life Stability: ± 0.005 % at 25 °C, 2000 hours at Rated Power
- Resistance Range: 0.005 Ω to 500 Ω
- Electrostatic Discharge (ESD) above 25 000 V
- Non Inductive, Non Capacitive Design
- Rise Time: 1.0 ns without ringing
- Current Noise: < - 40 dB
- Thermal EMF: 0.05 μV/°C typical
- Voltage Coefficient: < 0.1 ppm/V
- Non Inductive: 0.08 μH
- Non Hot Spot Design
- Terminal Finishes Available: Lead (Pb)-free
Tin/Lead Alloy
- Any value available within resistance range (e.g. 1K234)
- Prototype samples available from 48 hours. For more information, please contact foil@vishay.com
- For better performances, please see VCS300 series datasheet



RoHS*
COMPLIANT

FIGURE 1 - DIMENSIONS AND SCHEMATIC in inches (millimeters)								
Models VCS201, VCS202 and VCS232								
MODEL	L (Maximum)	H (Maximum)	W (Maximum)	LL (Minimum)	LS ± 0.020 (± 0.51)	LT ± 0.020 (± 0.51)	D ₁ (Nominal)	D ₂ (Nominal)
VCS201	1.060 (26.92)	0.374 (9.50)	0.177 (4.50)	0.500 (12.7)	0.530 (13.46)	0.925 (23.5)	0.032 (0.81)	0.025 (0.64)
VCS202, VCS232	1.240 (31.5)	0.512 (13.0)	0.177 (4.50)	0.500 (12.7)	0.689 (17.5)	1.083 (27.51)	0.040 (1.02)	0.032 (0.81)

TABLE 1 - CHARACTERISTICS					
MODEL NUMBER	RESISTANCE RANGE	TIGHTEST RESISTANCE TOLERANCE %	TCR (ppm/°C) 0 °C to + 60 °C	MAXIMUM CURRENT - Amp	POWER RATING at + 25 °C
VCS201 & VCS202	0.005 Ω to 0.01 Ω	± 1	± 30	10	1.5 W
	> 0.01 Ω to 0.05 Ω	± 0.5	± 25	15	2 W
	> 0.05 Ω to 0.2 Ω	± 0.1	± 15		
VCS232	0.2 Ω to 1.0 Ω	± 0.05	± 15	3	2 W
	> 1 Ω to 10 Ω	± 0.05	± 5		
	> 10 Ω to 500 Ω	± 0.02	± 5		

* Pb containing terminations are not RoHS compliant, exemptions may apply

200 Series





Vishay Foil Resistors Bulk Metal® Foil Technology Conformally Coated
 Precision Current Sensing Resistors
 with TCR of $5 \text{ ppm}/^\circ\text{C}$ and values down to $5 \text{ m}\Omega$

TABLE 2 - VISHAY VCS201, VCS202, VCS232 PERFORMANCE	
TEST OR CONDITION	VCS201, 202, 232 PERFORMANCE ¹⁾
Maximum Ambient Temperature at Rated Power	+ 25 °C
Maximum Ambient Temperature at Zero Power	+ 150 °C
Thermal Shock	± 0.1 %
Short Time Overload	± 0.1 %
Resistance to Solder Heat	± 0.05 %
Terminal Strength	± 0.05 %
High Temperature Exposure	± 0.1 %
Moisture Resistance	± 0.1 %
Low Temperature Storage	± 0.05 %
Shock (Specified Pulse)	± 0.1 %
Vibration (High Frequency)	± 0.1 %
Life (Rated Power, + 25 °C, 2000 hours)	± 0.5 %
Thermal EMF (Lead to Lead)	0.2 $\mu\text{V}/^\circ\text{C}$ Maximum (E terminals)

Note

1. ΔR 's plus additional 0.0005 Ω for measurement error

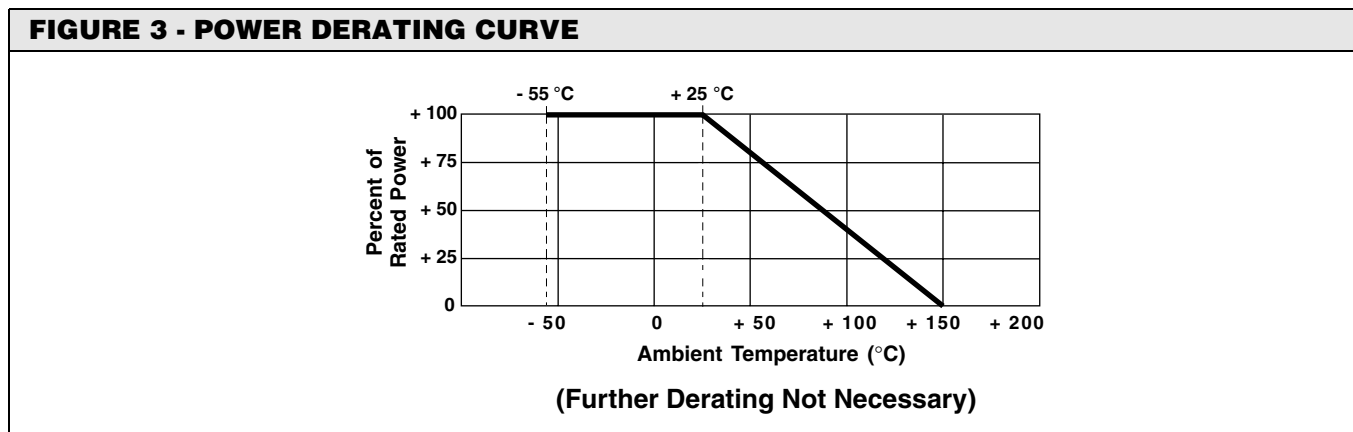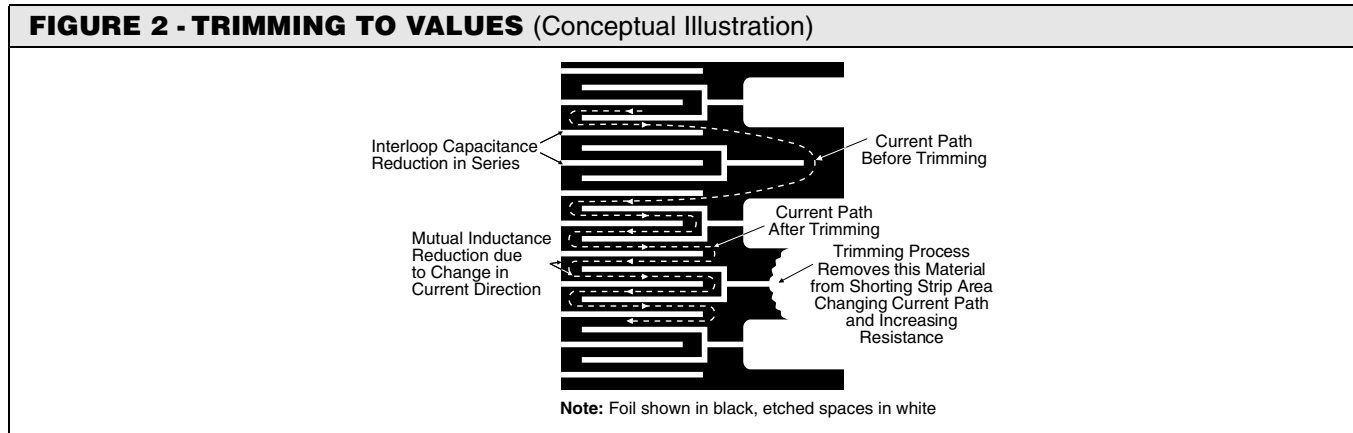




Bulk Metal® Foil Technology Conformally Coated Vishay Foil Resistors
 Precision Current Sensing Resistors
 with TCR of 5 ppm/°C and values down to 5 mΩ

TABLE 4 - GLOBAL PART NUMBER INFORMATION


NEW GLOBAL PART NUMBER: Y09550R00500F9L (preferred part number format)

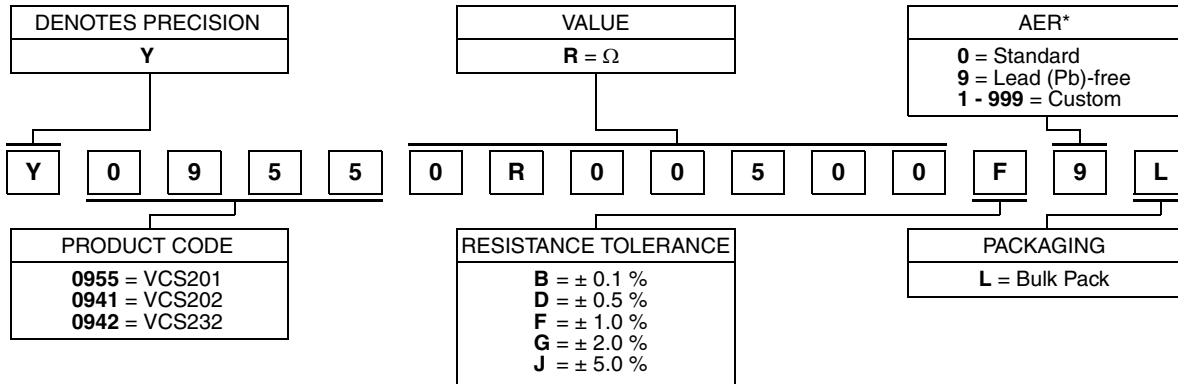

FOR EXAMPLE: ABOVE GLOBAL ORDER Y0955 0R00500 F 9 L:

TYPE: VCS201
 VALUE: 0.005 Ω
 ABSOLUTE TOLERANCE: ± 1.0 %
 TERMINATION: Lead (Pb)-free
 PACKAGING: Bulk Pack

HISTORICAL PART NUMBER: VCS201T 0R0050 F B (will continue to be used)

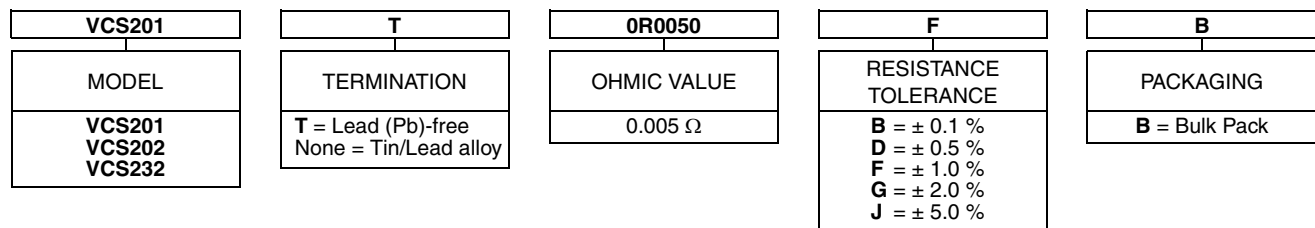

Note

* For non-standard requests, please contact Application Engineering.



Disclaimer

All product specifications and data are subject to change without notice.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

Vishay disclaims any and all liability arising out of the use or application of any product described herein or of any information provided herein to the maximum extent permitted by law. The product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein, which apply to these products.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications unless otherwise expressly indicated. Customers using or selling Vishay products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Vishay for any damages arising or resulting from such use or sale. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.