


# E-Series 75 Ohm Coupler 5 - 1000 MHz



## Features


- Coupling 8dB Typical
- Surface Mount
- Low Profile
- Tape and Reel Packaging available



## Description

M/A-COM's ELDC-8 is a high performance 75 Ohm Coupler, in a SM-55 low cost, surface mount package. The ELDC-8 is designed for use in high volume CATV applications. Typical applications include Set-top Boxes, Network Interface Units, Broadband Amplifiers and Headend equipment.

## SM-55 Package

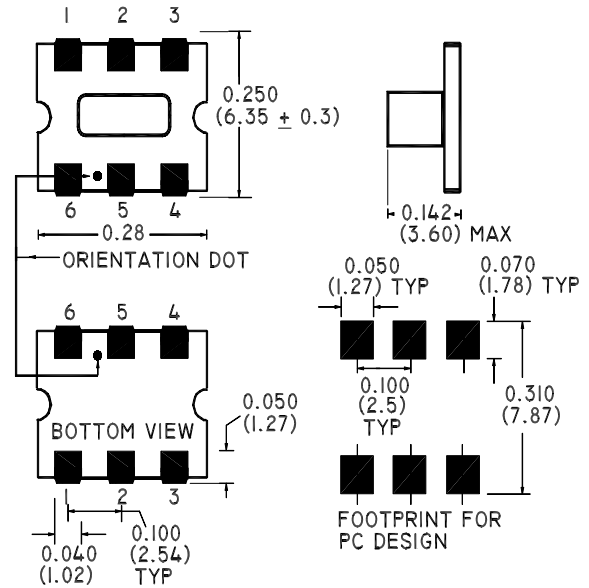

## Electrical Specifications @25°C, Z<sub>0</sub> = 75 Ohms

Frequency Range	Units	Nominal	Typical	Minimum	Maximum
Mainline Loss	5 - 870 MHz	—	1.5	—	2.3
	870 - 1000 MHz	—	2.1	—	2.6
Coupling	5 - 870 MHz	7.9	—	—	± 0.6
	870 - 1000 MHz	7.9	—	—	± 0.8
Coupling Flatness	dB	—	—	—	0.9
Directivity	5 - 870 MHz	—	17	11	—
	870 - 1000 MHz	—	13	10	—
Input Return Loss	5 - 50 MHz	—	18	17	—
	50 - 870 MHz	—	18	16	—
	870 - 1000 MHz	—	20	16	—
Output Return Loss	5 - 50 MHz	—	22	24	—
	50 - 870 MHz	—	34	20	—
	870 - 1000 MHz	—	24	18	—
Coupled Return Loss	5 - 50 MHz	—	19	16	—
	50 - 870 MHz	—	20	16	—
	870 - 1000 MHz	—	20	16	—

### \*Notes:

1. Core is coated with Paralyene C, 0.005" thick minimum.
2. Wire is heavy poly-nylon coated, rated to 180°C.

S 1349 E

**ADVANCED:** Data Sheets contain information regarding a product M/A-COM Technology Solutions is considering for development. Performance is based on target specifications, simulated results, and/or prototype measurements. Commitment to develop is not guaranteed.

**PRELIMINARY:** Data Sheets contain information regarding a product M/A-COM Technology Solutions has under development. Performance is based on engineering tests. Specifications are typical. Mechanical outline has been fixed. Engineering samples and/or test data may be available. Commitment to produce in volume is not guaranteed.

- North America Tel: 800.366.2266 • Europe Tel: +353.21.244.6400
- India Tel: +91.80.4155721 • China Tel: +86.21.2407.1588

Visit [www.macomtech.com](http://www.macomtech.com) for additional data sheets and product information.

### Operating Characteristics


Function	Pin No.
Input	6
Output	1
Coupled	4
External 75 Ohms	3
Ground	5
Not Connected	2

### Absolute Maximum Ratings


Parameter	Absolute Maximum
RF Power	250 mW
DC Current	30 mA
Pin Temperature (10 sec)	260°C
Operating/Storage Temperature	-40°C to +85°C

### Typical Performance @ 25°C


Mainline Loss

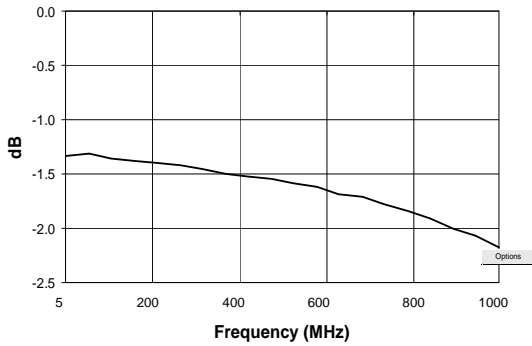


Input Return Loss

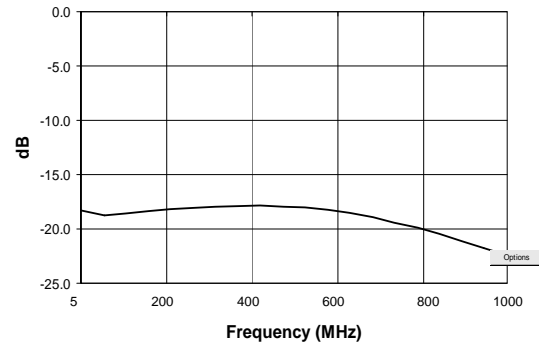


Coupling

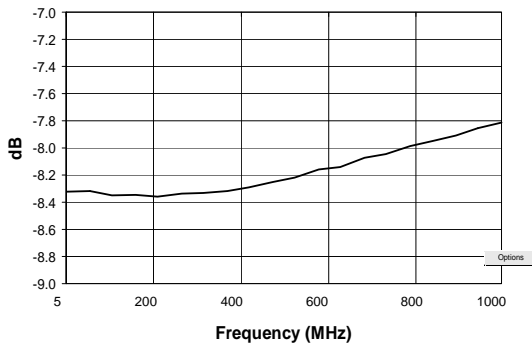


Output Return Loss

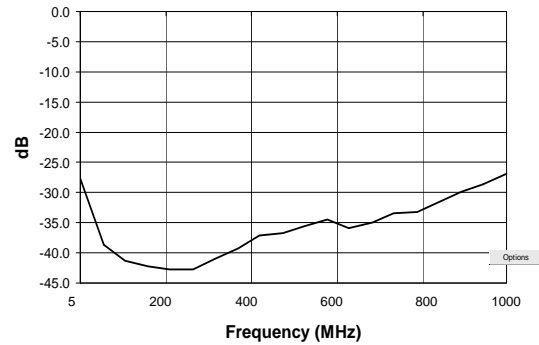

Directivity

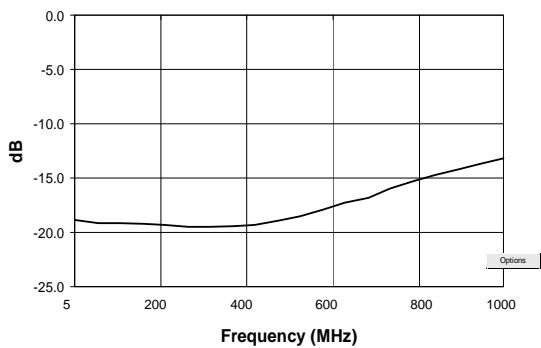

Coupled Port Return Loss

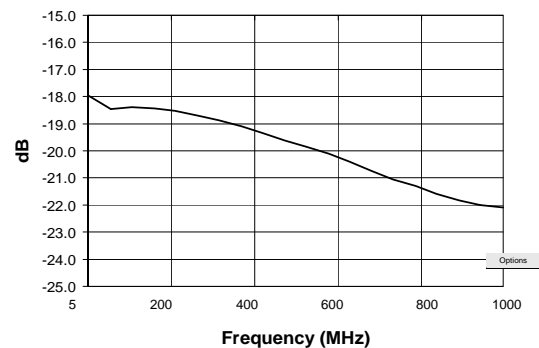

S 1349 E

**ADVANCED:** Data Sheets contain information regarding a product M/A-COM Technology Solutions is considering for development. Performance is based on target specifications, simulated results, and/or prototype measurements. Commitment to develop is not guaranteed.

**PRELIMINARY:** Data Sheets contain information regarding a product M/A-COM Technology Solutions has under development. Performance is based on engineering tests. Specifications are typical. Mechanical outline has been fixed. Engineering samples and/or test data may be available. Commitment to produce in volume is not guaranteed.

• **North America** Tel: 800.366.2266 • **Europe** Tel: +353.21.244.6400  
 • **India** Tel: +91.80.4155721 • **China** Tel: +86.21.2407.1588

Visit [www.macomtech.com](http://www.macomtech.com) for additional data sheets and product information.

M/A-COM Technology Solutions Inc. and its affiliates reserve the right to make