

ELLS-406RWA



Page 1 of 2



The ELLS-406 series is a large 10.00 mm (0.39") high seven segment display designed for viewing distances up to 7 meters.



RoHS Compliant
Aug 2004

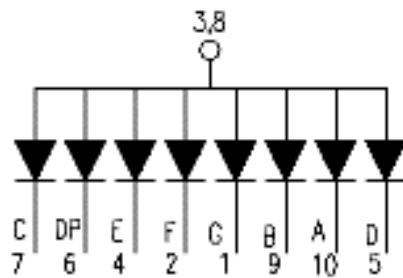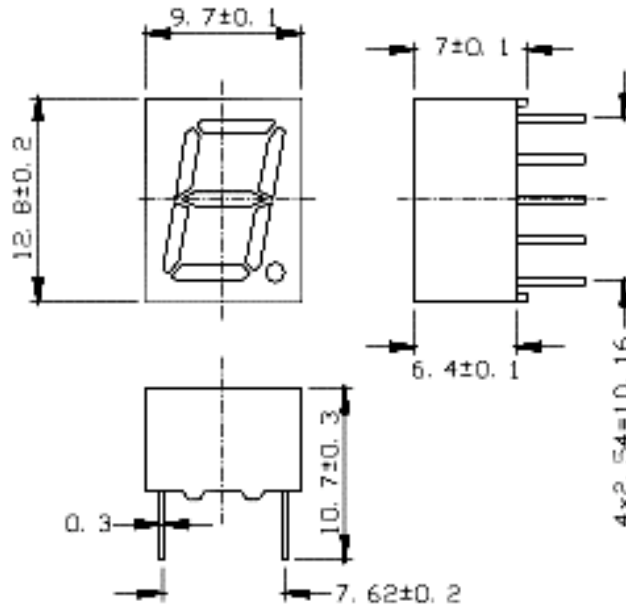

INTERNAL CONNECTION DIAGRM

- 1 CATHODE G
- 2 CATHODE F
- 3 COMMON ANODE
- 4 CATHODE E
- 5 CATHODE D
- 6 CATHODE DP
- 7 CATHODE C
- 8 COMMON ANODE
- 9 CATHODE B
- 10 CATHODE A

PART NO.	Chip		Face Color
	Material	Emitted Color	
ELLS-406RWA	GaAsP/GaP	Red	Gray

* Specifications subject to change without notice. Dimensions are in mm ±0.25 unless stated otherwise.



Absolute Maximum Ratings at $T_a = 25\text{ }^\circ\text{C}$

Parameter	Symbol	Rating	Units
Forward Current	I_F	25	mA
Operating Temperature	T_{opr}	-40 to +85	$^\circ\text{C}$
Storage Temperature	T_{stg}	-40 to +100	$^\circ\text{C}$
Soldering Temperature	T_{sol}	260 (for ≤ 5 sec)	$^\circ\text{C}$
Power Dissipation	P_d	60	mW
Pulse Forward Current (Pulse Width ≤ 10 msec and Duty $\leq 1/10$)	I_{FP}	160	mA
Reverse Voltage	V_R	5	V

Electronic Optical Characteristics

Parameter	Symbol	Min.	Typ.	Max.	Units	Condition
Luminous Intensity	Per segment	0.18	0.90	—	mcd	$I_F = 10\text{ mA}$
	Per decimal point	—	—	—		
Peak Wavelength	λ_p	—	632	—	nm	$I_F = 20\text{ mA}$
Dominant Wavelength	λ_d	—	624	—	nm	$I_F = 20\text{ mA}$
Spectrum Radiation Bandwidth	$\Delta\lambda$	—	20	—	nm	$I_F = 20\text{ mA}$
Forward Voltage	V_F	—	2.0	—	V	$I_F = 20\text{ mA}$
Reverse Current	I_R	—		10	μA	$V_R = 5\text{ V}$

* Specifications subject to change without notice. Dimensions are in mm ± 0.25 unless stated otherwise.