



LIGITEK

LIGITEK ELECTRONICS CO.,LTD.
Property of Ligitek Only

DOT MATRIX DIGIT LED DISPLAY (1.9Inch)



Lead-Free Parts

LMD8811/2CSRVG-XX/RP15-PF

DATA SHEET

DOC. NO : QW0905-LMD8811/2CSRVG-XX/RP15-PF

REV. : B

DATE : 09 - Sep. - 2006



LIGITEK



LIGITEK ELECTRONICS CO.,LTD.

Property of Ligitek Only


PART NO. LMD8811/2CSRVG-XX/RP15-PF

Page 1/10

Package Dimensions

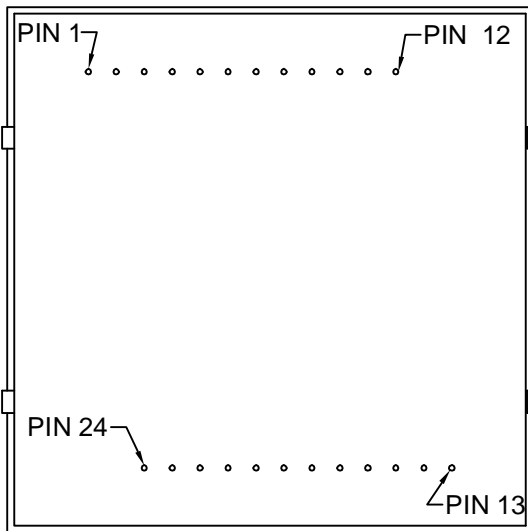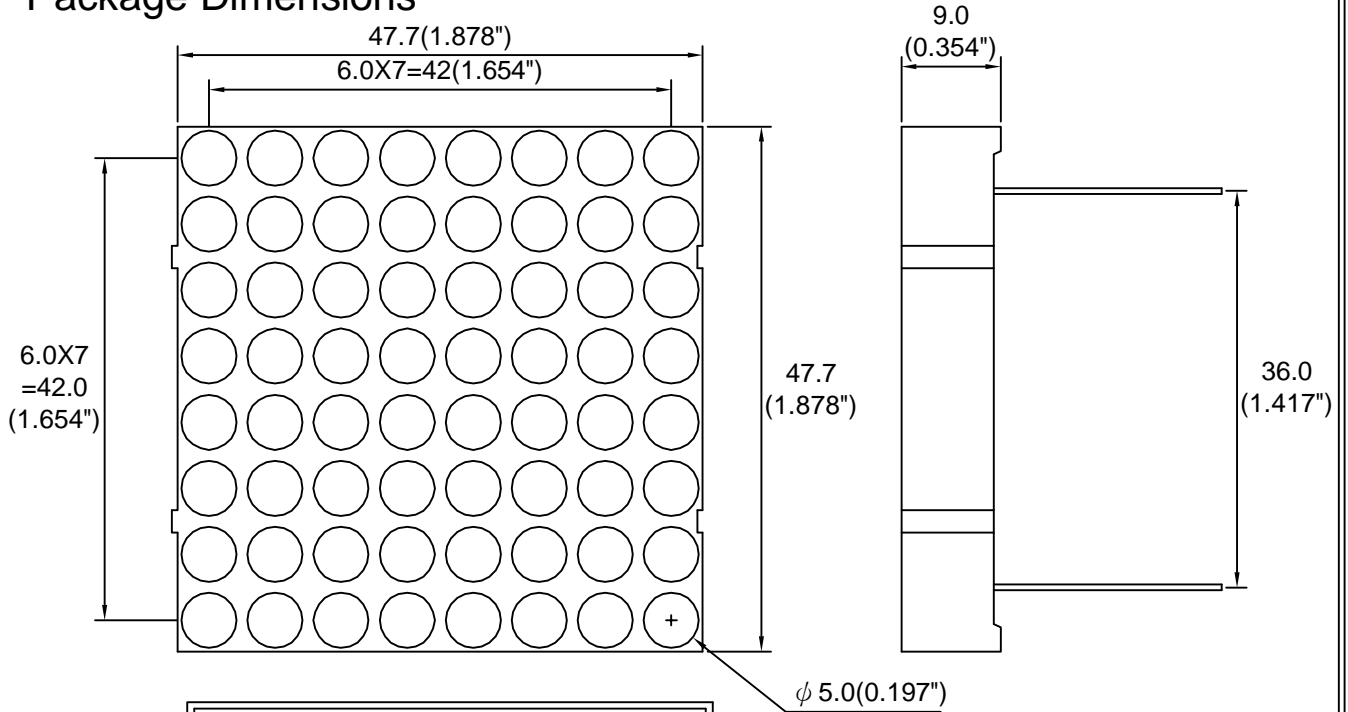

LMD8811/2CSRVG-XX/RP15-PF
LIGITEK

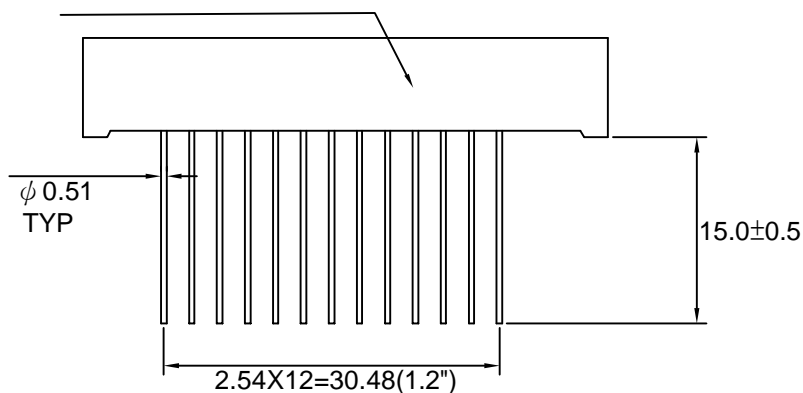


Note : 1.All dimension are in millimeters and (Inch) tolerance is ± 0.25 mm unless otherwise noted.
2.Specifications are subject to change without notice.





Internal Circuit Diagram

LMD8811CSRVG-XX/RP15-PF

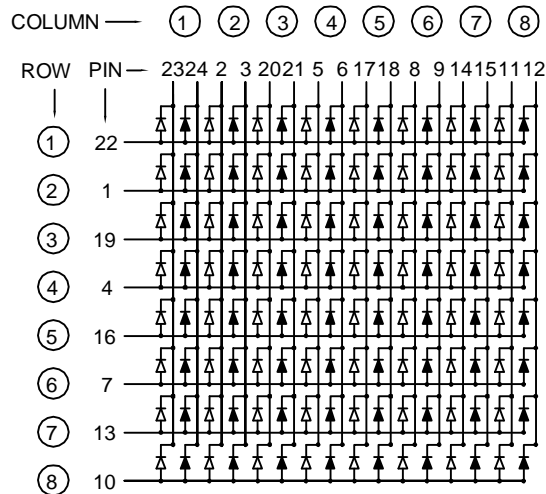

LMD8812CSRVG-XX/RP15-PF

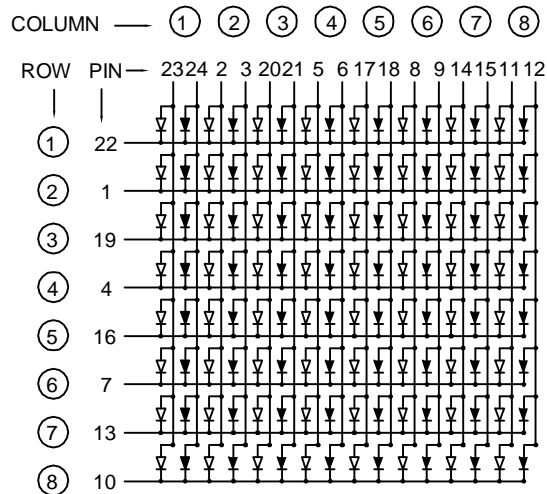



Electrical Connection

PIN NO.	LMD8811CSRVG-XX/RP15-PF	PIN NO.	LMD8811CSRVG-XX/RP15-PF
1	Anode Row 2	13	Anode Row 7
2	Cathode Column 2 (Green)	14	Cathode Column 7 (Green)
3	Cathode Column 2 (Red)	15	Cathode Column 7 (Red)
4	Anode Row 4	16	Anode Row 5
5	Cathode Column 4 (Green)	17	Cathode Column 5 (Green)
6	Cathode Column 4 (Red)	18	Cathode Column 5 (Red)
7	Anode Row 6	19	Anode Row 3
8	Cathode Column 6 (Green)	20	Cathode Column 3 (Green)
9	Cathode Column 6 (Red)	21	Cathode Column 3 (Red)
10	Anode Row 8	22	Anode Row 1
11	Cathode Column 8 (Green)	23	Cathode Column 1 (Green)
12	Cathode Column 8 (Red)	24	Cathode Column 1 (Red)

**Electrical Connection**

PIN NO.	LMD8812CSRVG-XX/RP15-PF	PIN NO.	LMD8812CSRVG-XX/RP15-PF
1	Cathode Row 2	13	Cathode Row 7
2	Anode Column 2 (Green)	14	Anode Column 7 (Green)
3	Anode Column 2 (Red)	15	Anode Column 7 (Red)
4	Cathode Row 4	16	Cathode Row 5
5	Anode Column 4 (Green)	17	Anode Column 5 (Green)
6	Anode Column 4(Red)	18	Anode Column 5 (Red)
7	Cathode Row 6	19	Cathode Row 3
8	Anode Column 6 (Green)	20	Anode Column 3 (Green)
9	Anode Column 6 (Red)	21	Anode Column 3 (Red)
10	Cathode Row 8	22	Cathode Row 1
11	Anode Column 8 (Green)	23	Anode Column 1 (Green)
12	Anode Column 8 (Red)	24	Anode Column 1 (Red)



Absolute Maximum Ratings at Ta=25 °C

Parameter	Symbol	Ratings		UNIT
		SR	VG	
Forward Current Per Chip	IF	30	30	mA
Peak Forward Current Per Chip (Duty 1/10,0.1ms Pulse Width)	IFP	100	120	mA
Power Dissipation Per Chip	PD	100	100	mW
Reverse Current Per Any Chip	Ir	10		μA
Operating Temperature	Topr	-25 ~ +85		°C
Storage Temperature	Tstg	-25 ~ +85		°C

Solder Temperature 1/16 Inch Below Seating Plane For 3 Seconds At 260 °C

Part Selection And Application Information(Ratings at 25°C)

PART NO	CHIP		common cathode or anode	λ P (nm)	Δ λ (nm)	Electrical					IV-M
	Material	Emitted				Vf(v)			Iv(mcd)		
						Min.	Typ.	Max.	Min.	Typ.	
LMD8811CSRVG-XX/RP15-PF	GaAlAs	Red	Common Cathode	660	20	1.5	1.8	2.4	8.5	15.25	2:1
	GaP	Green		565	30	1.7	2.1	2.6	7.2	12.8	
LMD8812CSRVG-XX/RP15-PF	GaAlAs	Red	Common Anode	660	20	1.5	1.8	2.4	8.5	15.25	
	GaP	Green		565	30	1.7	2.1	2.6	7.2	12.8	

Note : 1.The forward voltage data did not including ±0.1V testing tolerance.
2. The luminous intensity data did not including ±15% testing tolerance.



Test Condition For Each Parameter

Parameter	Symbol	Unit	Test Condition
Forward Voltage Per Chip	V_f	volt	$I_f=20\text{mA}$
Luminous Intensity Per Chip	I_v	mcd	$I_f=10\text{mA}$
Peak Wavelength	λ_p	nm	$I_f=20\text{mA}$
Spectral Line Half-Width	$\Delta \lambda$	nm	$I_f=20\text{mA}$
Reverse Current Any Chip	I_r	μA	$V_r=5V$
Luminous Intensity Matching Ratio	IV-M		



Typical Electro-Optical Characteristics Curve

SR CHIP

Fig.1 Forward current vs. Forward Voltage

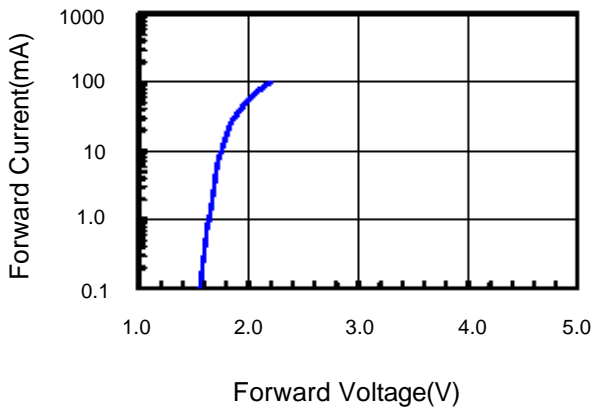


Fig.2 Relative Intensity vs. Forward Current

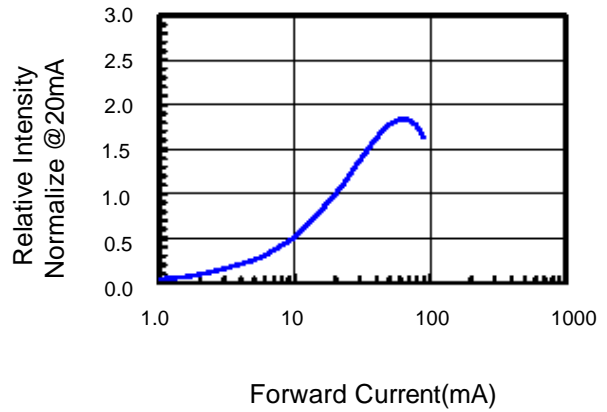


Fig.3 Forward Voltage vs. Temperature

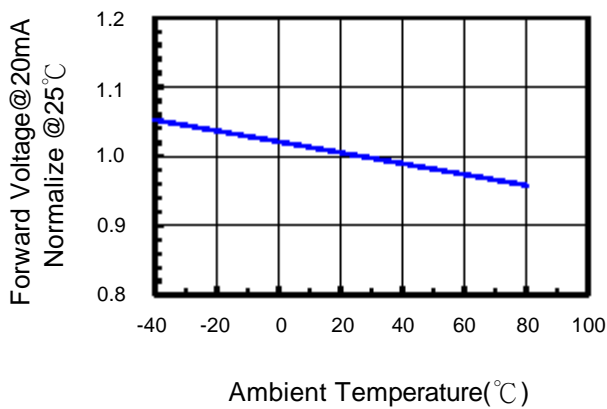


Fig.4 Relative Intensity vs. Temperature


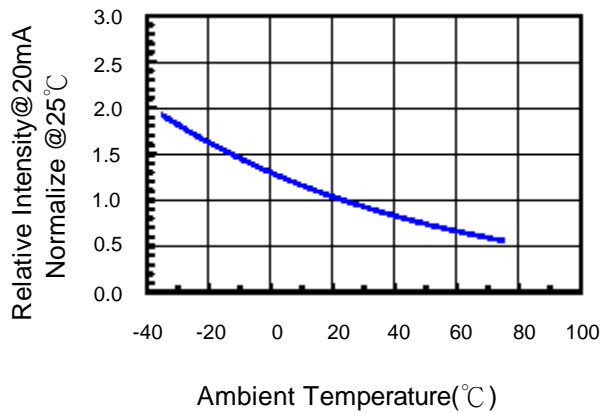


Fig.5 Relative Intensity vs. Wavelength



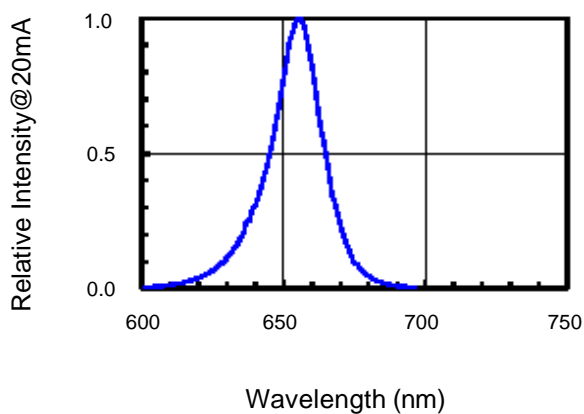

Typical Electro-Optical Characteristics Curve

VG CHIP

Fig.1 Forward current vs. Forward Voltage

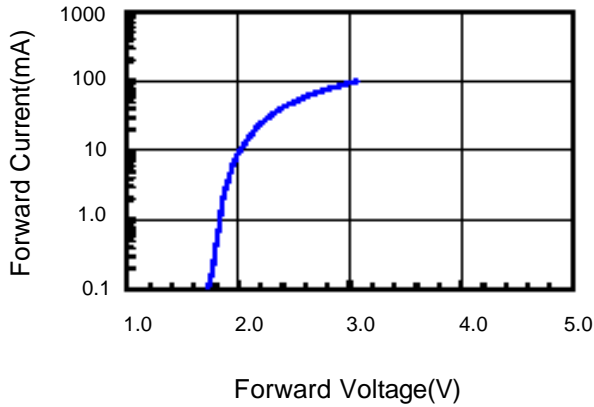


Fig.2 Relative Intensity vs. Forward Current

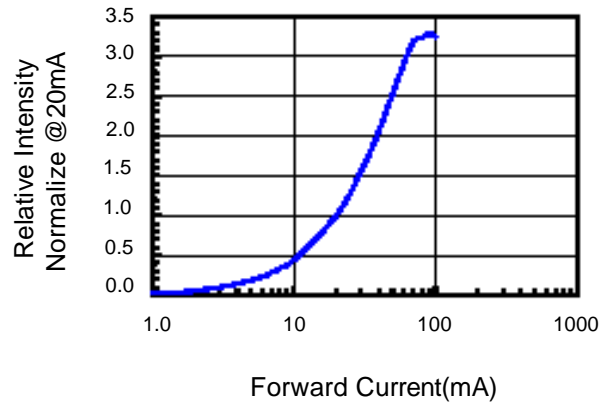


Fig.3 Forward Voltage vs. Temperature

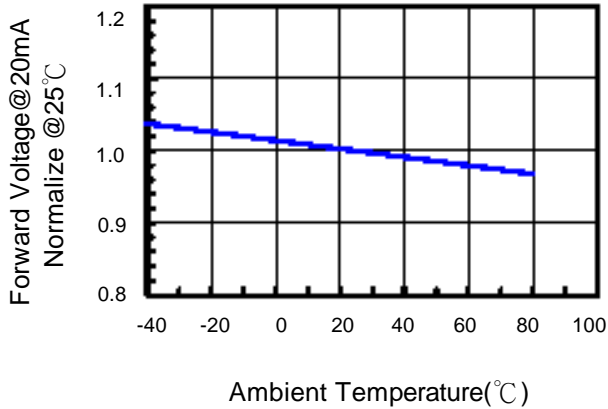


Fig.4 Relative Intensity vs. Temperature


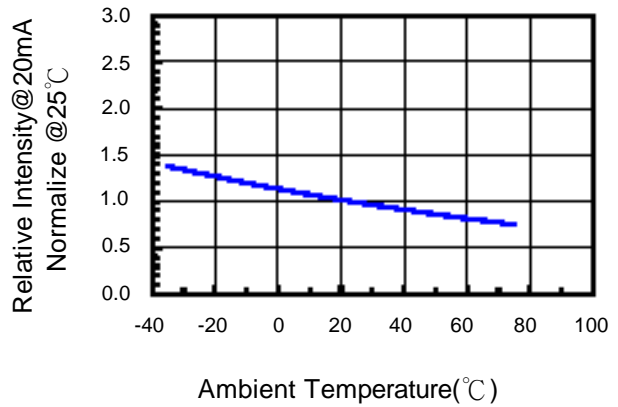


Fig.5 Relative Intensity vs. Wavelength



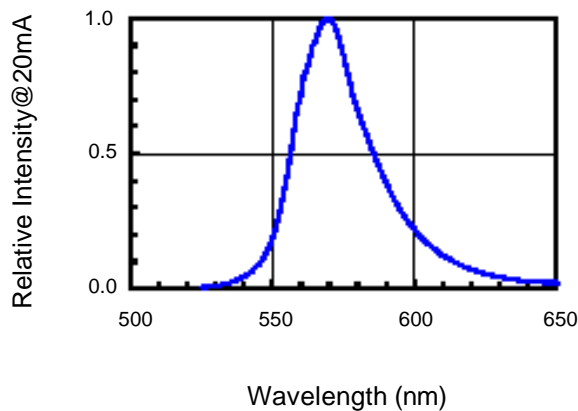


Soldering Condition(Pb-Free)

1.Iron:

Soldering Iron:30W Max
 Temperature 350° C Max
 Soldering Time:3 Seconds Max(One time only)
 Distance:Solder Temperature 1/16 Inch Below Seating
 Plane For 3 Seconds At 260° C

2.Wave Soldering Profile

Dip Soldering
 Preheat: 120° C Max
 Preheat time: 60seconds Max
 Ramp-up
 2° C/sec(max)
 Ramp-Down:-5° C/sec(max)
 Solder Bath:260° C Max
 Dipping Time:3 seconds Max
 Distance:Solder Temperature 1/16 Inch Below Seating
 Plane For 3 Seconds At 260° C

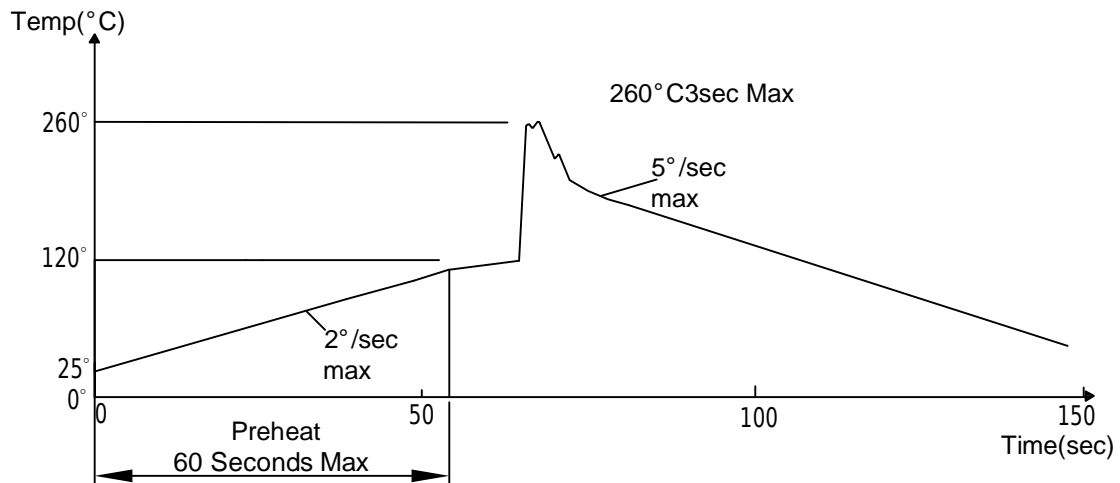

Note: 1.Wave solder should not be made more than one time.
 2.You can just only select one of the soldering conditions as above.

**Reliability Test:**

Test Item	Test Condition	Description	Reference Standard
Operating Life Test	1.Under Room Temperature 2.If=10mA 3.t=1000 hrs (-24hrs, +72hrs)	This test is conducted for the purpose of determining the resistance of a part in electrical and thermal stressed.	MIL-STD-750: 1026 MIL-STD-883: 1005 JIS C 7021: B-1
High Temperature Storage Test	1.Ta=105 °C±5°C 2.t=1000 hrs (-24hrs, +72hrs)	The purpose of this is the resistance of the device which is laid under condition of high temperature for hours.	MIL-STD-883:1008 JIS C 7021: B-10
Low Temperature Storage Test	1.Ta=-40 °C±5°C 2.t=1000 hrs (-24hrs, +72hrs)	The purpose of this is the resistance of the device which is laid under condition of low temperature for hours.	JIS C 7021: B-12
High Temperature High Humidity Test	1.Ta=65 °C±5°C 2.RH=90 %~95% 3.t=240hrs ±2hrs	The purpose of this test is the resistance of the device under tropical for hours.	MIL-STD-202:103B JIS C 7021: B-11
Thermal Shock Test	1.Ta=105 °C±5°C & -40 °C±5°C (10min) (10min) 2.total 10 cycles	The purpose of this is the resistance of the device to sudden extreme changes in high and low temperature.	MIL-STD-202: 107D MIL-STD-750: 1051 MIL-STD-883: 1011
Solder Resistance Test	1.T.Sol=260 °C±5°C 2.Dwell time= 10 ±1sec.	This test intended to determine the thermal characteristic resistance of the device to sudden exposures at extreme changes in temperature when soldering the lead wire.	MIL-STD-202: 210A MIL-STD-750: 2031 JIS C 7021: A-1
Solderability Test	1.T.Sol=230 °C±5°C 2.Dwell time=5 ±1sec	This test intended to see soldering well performed or not.	MIL-STD-202: 208D MIL-STD-750: 2026 MIL-STD-883: 2003 JIS C 7021: A-2